

Recessed Can Adapter for Pendenza Fixtures

700PENRCAD

1.2



GENERAL PRODUCT INFORMATION

This product is suitable for dry locations only.



PARTS IN THIS KIT

- (2) Hook Brackets
- (2) Self-tapping screws
- (2) #8-32 screws
- (2) Torsion spring can adapters
- (1) Can adapter slide plate
- (1) Socket adapter
- (1) Orange connector
- (1) Protective wire sleeve

This product requires installation by a qualified electrician. Be sure to read all instructions before installing and DISCONNECT POWER TO THE RECESSED DOWN LIGHT.

WARNING - Risk of fire or electric shock. Do not alter, relocate, or remove wiring, lampholders, ballasts, or any other electrical component.


WARNING - Risk of fire or electric shock. Luminaires wiring, ballasts, or other electrical parts may be damaged when drilling for installation of reflector kit hardware. Check for enclosed wiring and components.

WARNING - Risk of fire or electric shock. Install this kit only in a luminaire that has the construction features and dimensions shown in Illustration 1A.

WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.




Down Light Specification

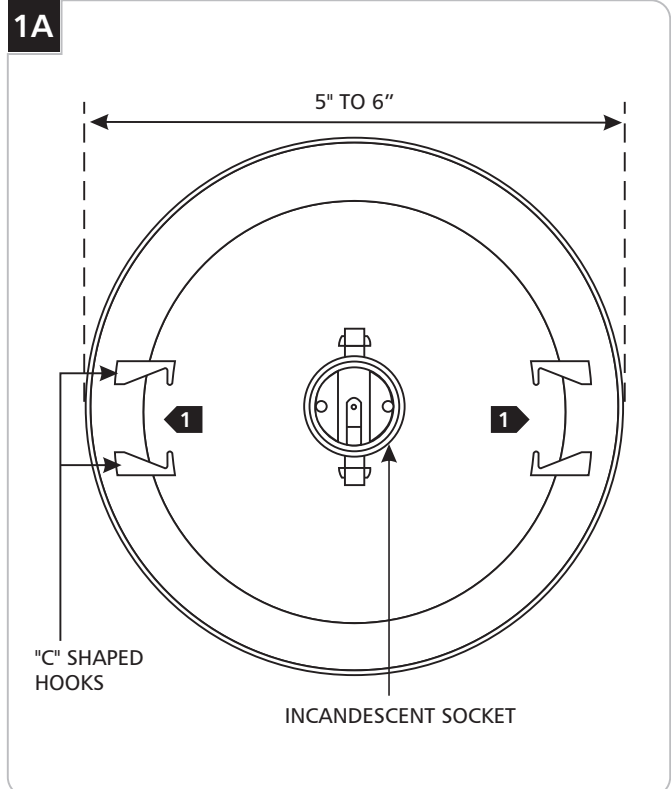


- 1** The Pendenza recessed can adapter can be mounted to down lights that are 5" to 6" in diameter. If the recessed can does not have C-shaped hooks, it must be retrofitted with the hook brackets provided as detailed in section 2A.

Retrofit the C-Hooks (Optional)

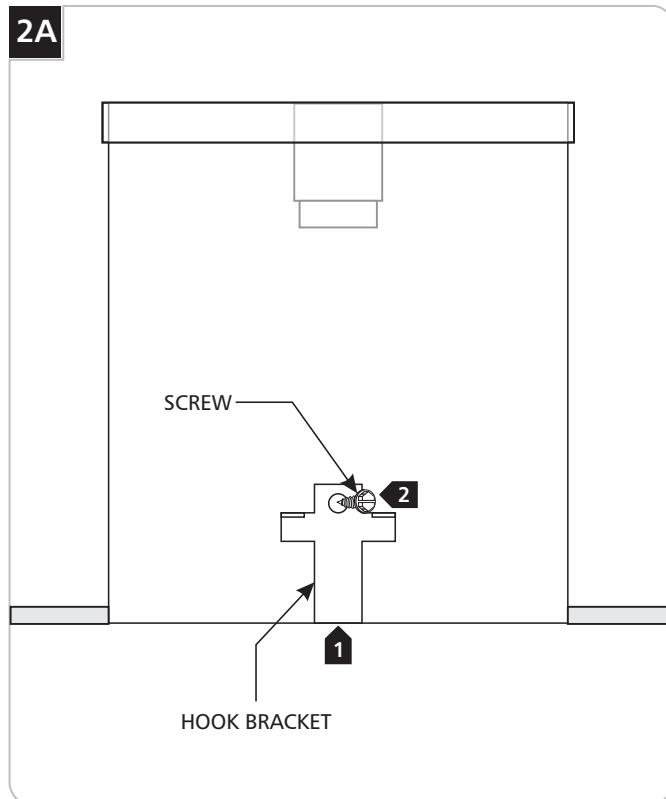

- 1 Slip the end of a hook bracket over the edge of the can.
- 2 Drive the self-tapping screw provided through the hole in the hook bracket and into the side of the can.
- 3 Mount the second hook bracket to the opposite side of the can.


Attach the Adapter to the Fixture

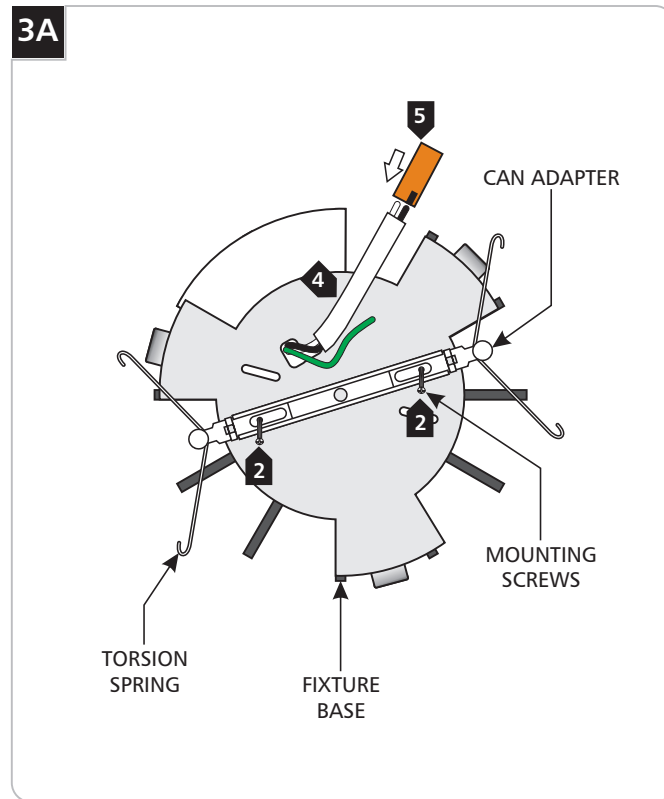

- 1 Line up the holes in the can adapter with the threaded holes on the back of the fixture base.
- 2 Attach the adapter to the base with the two small screws provided.
- 3 Position the torsion springs to match the inside diameter of the can, spacing them equally from the center before driving the mounting screws in all the way.
- 4 Feed the black and white wires through the protective sleeve provided.
- 5 Push the orange connector onto the black and white wires. Be sure to line up the black wire with the black stripe on the connector.


Connect the Power

4A

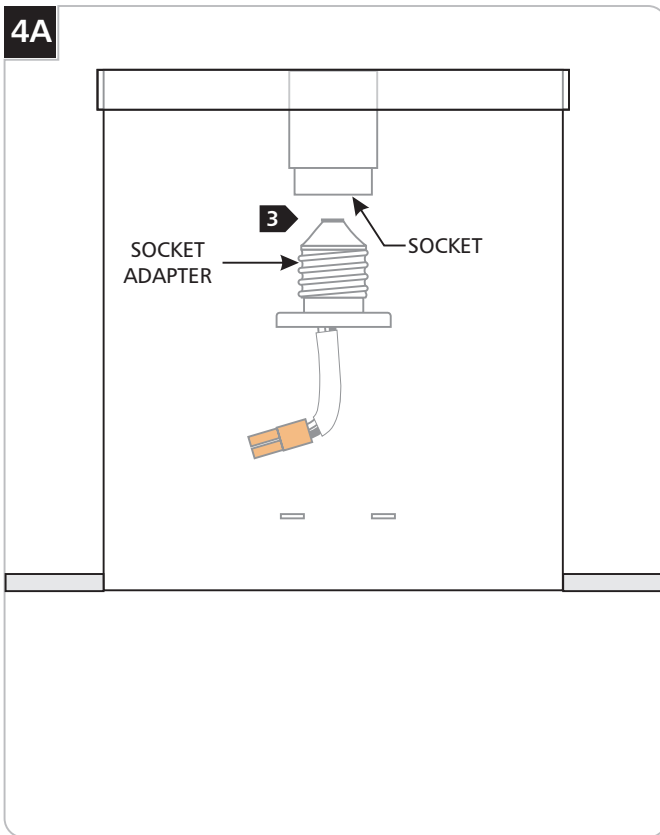


- 1 Turn off power to the recessed down light.
- 2 Remove the existing trim and incandescent lamp.
- 3 Screw the socket adapter into the incandescent socket.


4B

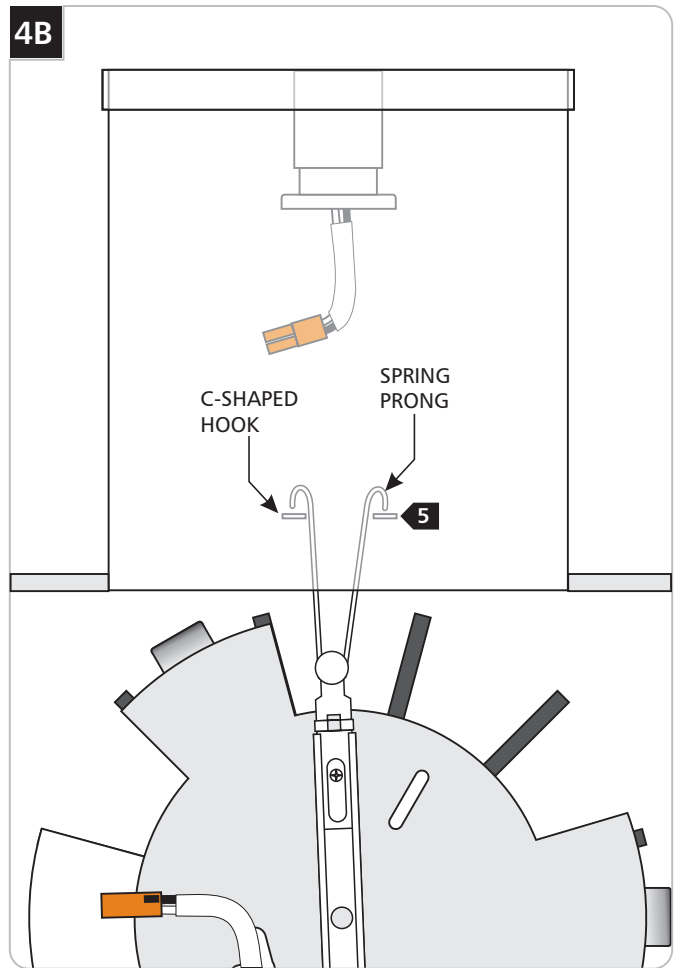

- 4 Squeeze together the springs so the prongs face away from each other.
- 5 Hang the prongs onto the C-shaped hooks inside the recessed can.

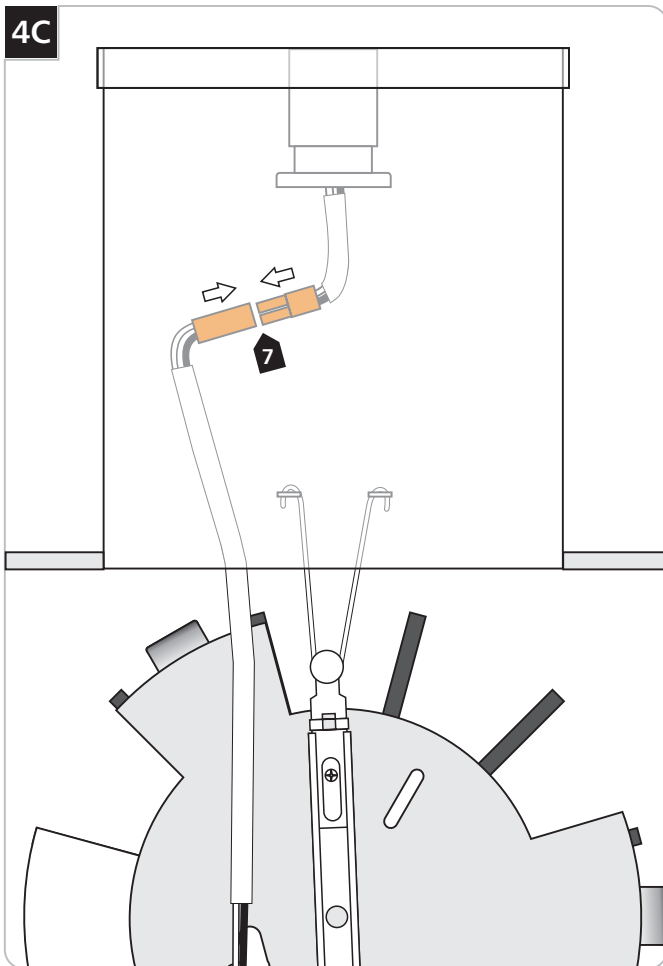

- 6** Connect the fixture to a suitable ground according to local electrical codes.
- 7** Plug the fixture connector into the socket adapter connector.

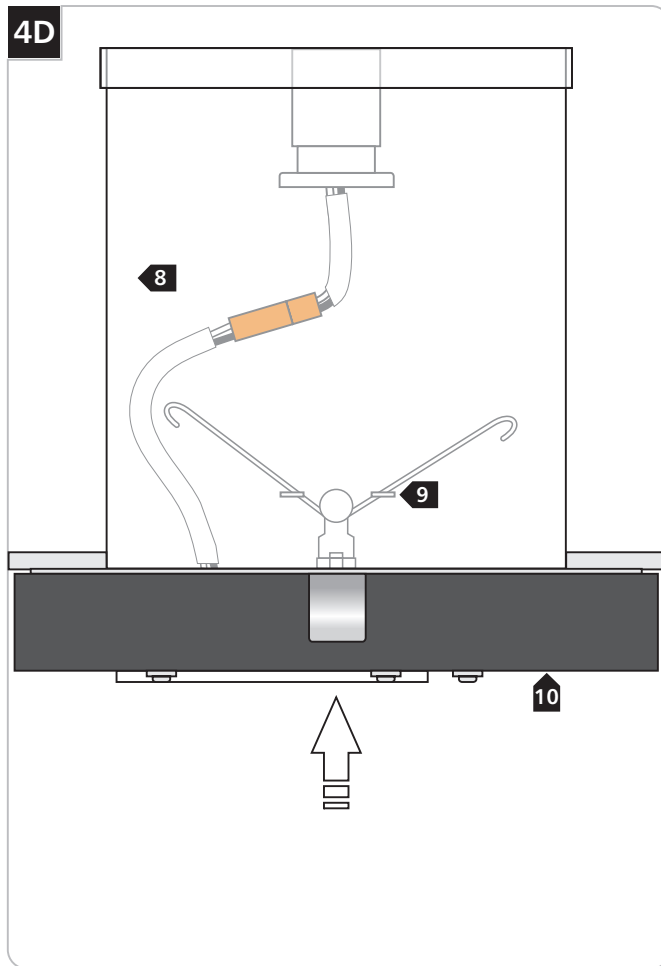

- 8** Place the wires and connector inside the recessed can.
- 9** Hang the second pair of spring prongs to the C-shaped hooks inside the recessed can.
- 10** Push the fixture base gently up to the ceiling. The springs will open up and hold the fixture base in place.
- 11** Follow the instructions provided with the fixture to attach the cover.

SAVE THESE INSTRUCTIONS!



TECH LIGHTING®

7400 Linder Ave, Skokie, IL 60077

847.410.4400

www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company