


LEUCOS® USA

INSTALLATION INSTRUCTIONS

ROY



A1

Enclosed



One installer



Save instructions

Revised

16 December 2003

WARNING: - BEFORE BEGINNING INSTALLATIONS TURN POWER OFF AT CIRCUIT BREAKER.
- HANDLE GLASS SHADE CAREFULLY IN ORDER NOT TO SCRATCH IT.

ROY FLUORESCENT

1. Attach the backing "A" to the Junction-box.
2. Make electrical connections to supply wires within the Junction-box.
3. Replace reflector "K" on the backing "A" using screws provided.
4. Loosen one side of retainer ring "C" with screw "J" so ring pivots to allow for glass placement
5. Install the lamps into sockets, then position glass diffuser "B" inside the fixture body.
6. Secure diffuser "B" with retainer rings "C" with screws "J" provided.
7. Restore power.

 USE : max **2x13W** Gx23 Type QUAD TUBE
 OR : max **2x13W** Gx23 Type TWIN TUBE

 USE : max **2x18W** 2G11 Type TWIN LONG TUBE **M.O.L.(in)9.0.**


ROY INCANDESCENT

1. Remove reflector plate "B" from fixture body "A".
2. Attach the backing "A" to the Junction-box.
3. Make the electrical connections to supply wires within the Junction-box.
4. Replace reflector "B" on the backing "A" using screws provided.
5. Install the lamps into sockets, then position glass diffuser "B" inside the fixture body.
6. Secure the glass diffuser "B" with retainer rings "C" with screws "J" provided.
7. Restore power.

 USE : max **2x60W** for ceiling or wall Type A

 USE : max **2x100W** wall mount only Type A

For additional information please contact your local dealer or **LEUCOS U.S.A.**
 At: Tel. (732) 225-0010 Fax. (732) 225-0250




CIRCUIT DIAGRAM:



MOUNTS TO STANDARD JUNCTION BOX

ROY fluorescent

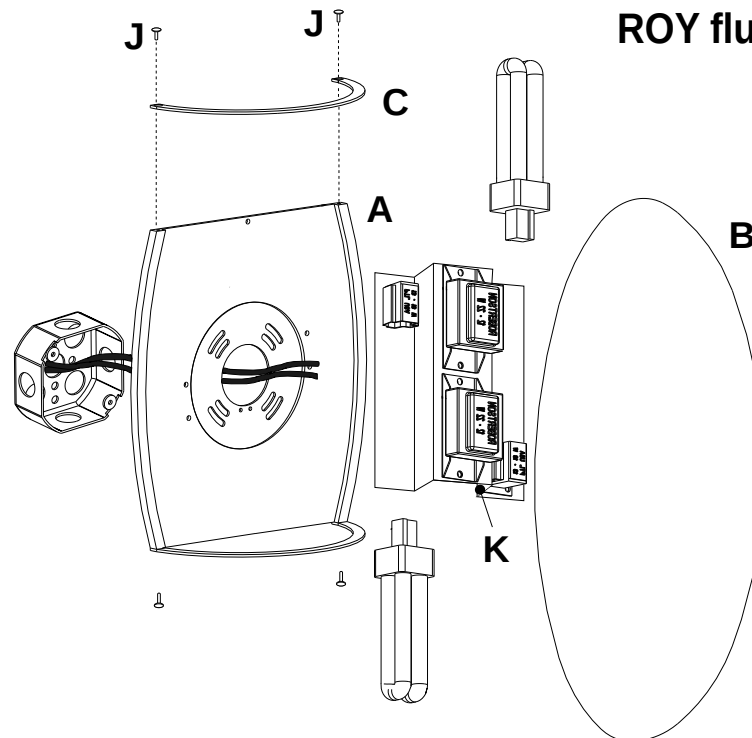

ROY incandescent

