



PAR30/PAR38 Flood MODEL FL9

120 Volt, 120 Watt Max., PAR30/PAR38 Halogen

Specifications:

Body: Cast C84400 bronze or cast 356 aluminum. 18-8 stainless steel hardware.

Knuckle: Cast C84400 bronze or cast 356 aluminum Rotate and Lock Knuckle includes a 304 stainless steel nipple with 1/2" NPS male threads for use with industry standard mounts. Double taper allows fixture to hold vertical position during aiming and ensures a solid lock. Tapered clamp allows fixture to hold position during horizontal aiming, ensures a solid lock, and prevents the knuckle from coming apart when locking screw is loosened or removed. Two 18-8 stainless steel rotational stop pins allow a full 360° of rotation. High temperature silicone O-rings and a molded high temperature silicone wire pass-thru prevents water from entering fixture at knuckle. Knuckle design is protected under U.S. Patents #6,966,679 and #7,108,405.

Cap: Cast C84400 bronze or cast 356 aluminum cap mounts with five 18-8 stainless steel fasteners, and seals by compressing a molded high temperature black silicone gasket around the lens and against the housing. Up to two lens

accessories can be used, and are held in the molded silicone lens gasket.


Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant chromate conversion coating. Bronze model available in two additional finishes: Natural and Aged.

Socket: Medium Base Porcelain Lamp holder with copper alloy, nickel-plated screw shell and center contact, and 600V, 250° C, PTFE coated 18 ga leads.

Lamp: 120 Volt medium base 'long neck' PAR30 halogen up to 75 Watts, or 120 Volt medium base PAR38 halogen up to 120 Watts.

Lens: Tempered, 1/4" thick, stepped lens allows for flush mounting.

Certification: CSA tested & certified to US and Canadian safety standards per UL1598 for wet location use in landscape applications.

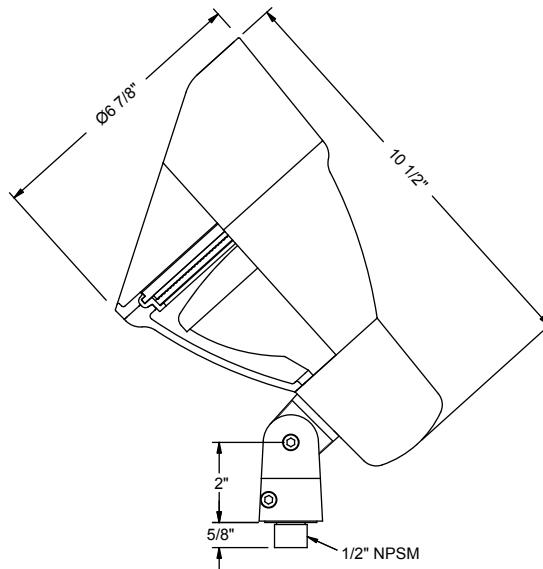

Ordering Information:

Model	Finish	Lamp ²	Lens Accy ^{1,2}	Filter ^{1,2}	Louver ^{1,2}
FL9A - Aluminum	BL - Black	0 - None	0 - None	0 - None	0 - None
FL9B - Bronze	BLT - Textured Black	PAR30 Halogen:	PAR38 Halogen:	L1 - Spread Lens	F1 - Red
	BN - Bronze	34 - 50W, 9° Narrow Spot	42 - 90W, 9° Narrow Spot	L2 - Linear Lens	F2 - Blue
	BNT - Textured Bronze	35 - 50W, 16° Spot	43 - 90W, 12° Spot	L3 - Softening Lens	F3 - Light Blue
	BAT - Textured Bark	36 - 50W, 30° Flood	44 - 90W, 30° Flood		F4 - Green
	WI - White	37 - 50W, 40° Wide Flood	45 - 120W, 10° Narrow Spot		F5 - Amber
	GRT - Textured Green	38 - 75W, 9° Narrow Spot	46 - 120W, 30° Flood		F6 - Pink
	SI - Silver	39 - 75W, 16° Spot	47 - 120W, 55° Wide		
	GY - Grey	40 - 75W, 30° Flood			
	BE - Beige	41 - 75W, 40° Wide Flood			
	GNT - Textured Granite				
	SAT - Textured Sand				
	PAT - Textured Patina				
	EAT - Textured Earth				
	NAT - Natural (FL9B only)				
	AGE - Aged (FL9B only)				

Notes:

1. Only two lens options may be specified.
2. CFL lamps available separately. Contact your Vision3 lighting CSR. Lens options may not be used with CFL lamps.
3. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: FL9B - NAT - 0 - L1 - F2 - 0