

**WARNING:**  
INSTALL PRODUCT IN ACCORDANCE  
WITH LOCAL AND NATIONAL ELECTRICAL  
CODES.


**WARNING:**  
FAILURE TO COMPLY WITH THE  
INSTALLATION INSTRUCTIONS MAY  
RESULT IN DEATH OR SERIOUS INJURY

**WARNING:**  
READ ALL SAFETY INSTRUCTIONS  
INCLUDED WITH LUMINAIRE BEFORE  
INSTALLING LUMINAIRE.


**CAUTION:**  
THIS IS AN ELECTRONIC DEVICE. CARE MUST BE TAKEN  
DURING STORAGE AND HANDLING. STORE IN A CLEAN, COOL  
AND DRY LOCATION. ELECTROSTATIC DISCHARGE (ESD) CAN  
HARM THIS PRODUCT. AVOID STATIC DISCHARGE WHILE  
HANDLING THIS PRODUCT.

**CAUTION:**  
INSIGHT LIGHTING IS NOT RESPONSIBLE FOR THE  
STRUCTURAL INTEGRITY OF THE BUILDING TO  
SUPPORT THE LUMINAIRE. ADDITIONAL BACKING  
MAY BE REQUIRED.


ISOMETRIC VIEWS

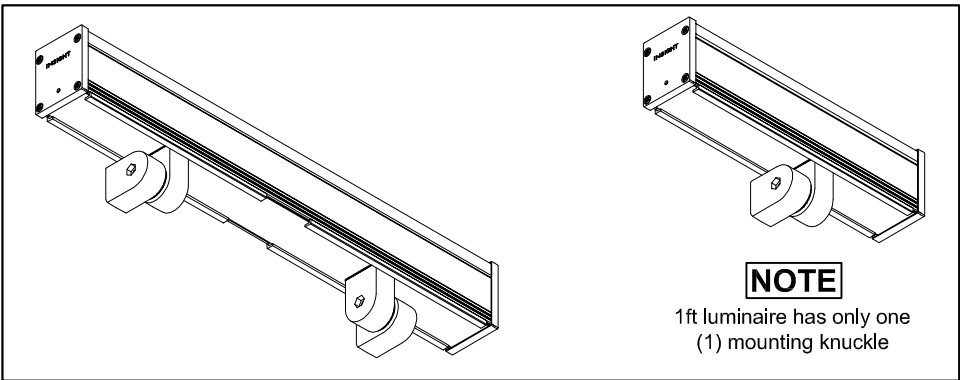

MOUNTING DIMENSIONS

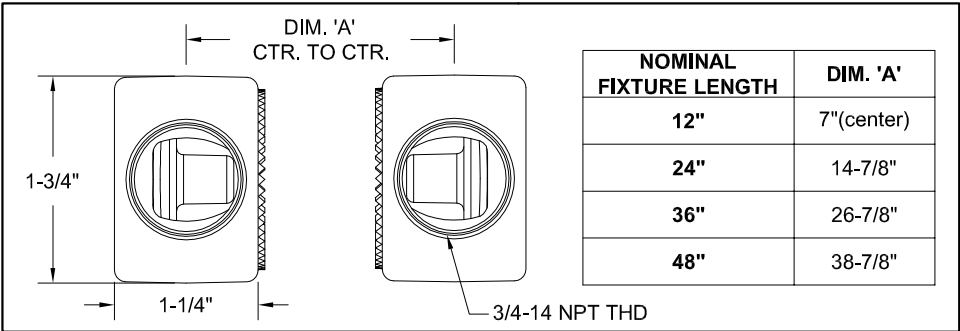

MOUNTING OPTIONS

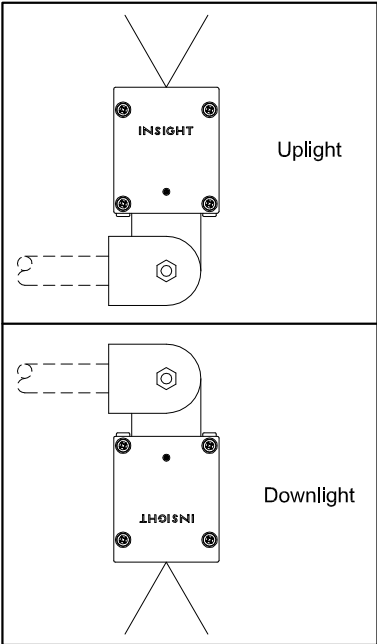

WIRING DETAILS

**NON DIMMING**

**ACV**  
NO EXTERNAL  
TERMINATION

BLACK	WHITE	GREEN	BLUE/ GRAY	YELLOW/ PURPLE
LINE	NUETRAL	GROUND	DATA -	DATA +

**0-10V DIMMING / DMX DAISY CHAIN**

**DMX APPLICATIONS REQUIRE ONE OF THE FOLLOWING CABLES**

STANDARD DMX APPLICATIONS	
INDOOR	BELDEN 9841
PLENUM RATED	BELDEN 82841
OUTDOOR	BELDEN 3105A

LARGE SCALE DMX APPLICATIONS	
INDOOR 2 PAIR	BELDEN 9842
PLENUM RATED 2 PAIR	BELDEN 82842
OUTDOOR 2 PAIR	BELDEN 3107A

**TERMINATOR INSTALLATION**

CONCEALED WIRING CONDUIT MOUNT INSTALL

**1 INSTALL LUMINAIRE LEADS**

Feed luminaire leads through 3/4" conduit from luminaire. Apply teflon tape to threads of 3/4" conduit.

**2 ATTACH CONDUIT**

Attach conduit to mounting knuckle (\*On 12" luminaire secure using 1/4-20 set screw).

**3 ELECTRICAL CONNECTIONS**

**NOTE**  
See Wiring Details and Wiring Layouts for more information

Raise luminaire to mounting surface. Make all electrical connections as per any local and/or NEC codes. Install conduit with luminaire to mounting surface (See 'Mounting Dimensions' above).

**4 SEAL CONNECTION**

Apply RTV sealant and teflon tape (by others) as needed around perimeter of the conduit. **Seal must be water tight.**

**5 FINAL ADJUSTMENT**

**NOTE**  
Hand tighten screws to **15in. lbs. Torque, Max.**

To adjust luminaire, loosen adjusting screw on luminaire knuckle, adjust luminaire to desired position and tighten adjusting screw and nut. **DO NOT OVER TIGHTEN.**