


FEATURES

- Dual 120/277 VAC 60Hz input
- Solid-state charging and transfer circuitry (no relays are used)
- Two-step charger
- Circuit is battery short circuit and reverse polarity protected
- Universal mounting knockouts
- Low-voltage battery disconnect
- Brownout protected, line-latched transfer circuit

Compliances may not apply to all product configurations. Please consult the product spec sheet for compliance details.

COMPLIANCES: UL924 Listed; NFPA 101 Compliant, NYC Code Compliant

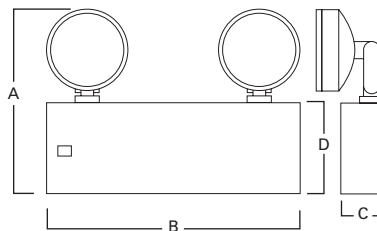

**B BUDGET
EMERGENCY
LIGHT**

ORDERING INFORMATION - NEW YORK CITY

| Family | Capacity in Watts (Hours) | | | | Number of Heads | Watts per Head | Max Remote Heads | Replacement Lamp | Dimensions (mm) | | | | Shipping Weight | |
|-----------|---------------------------|----|----|---|-----------------|----------------|------------------|------------------|-----------------|-------------|---------------|------------|-----------------|--|
| | 1.5 | 2 | 3 | 4 | | | | | A | B | C | D | | |
| 6 VOLT | | | | | | | | | | | | | | |
| 6BCNY1 | 27 | 22 | 18 | – | 2 | 12 | – | 6RW12 | 14" (355mm) | 10" (254mm) | 2-5/8" (67mm) | 9" (229mm) | 6 | |
| 6BCNY18 | 18 | 15 | – | – | 2 | 9 | – | 6RW9 | 14" (355mm) | 10" (254mm) | 2-5/8" (67mm) | 9" (229mm) | 10 | |
| 12 VOLT | | | | | | | | | | | | | | |
| 12BCNY2 | 27 | 22 | 18 | – | 2 | 12 | – | 12RW12 | 14" (355mm) | 10" (254mm) | 2-5/8" (67mm) | 9" (229mm) | 13 | |
| 12BCNY3-3 | 36 | – | – | – | 3 | 12 | – | 12RW12 | 14" (355mm) | 13" (330mm) | 2-5/8" (67mm) | 9" (229mm) | 17 | |
| 12BCNY4 | 54 | 44 | – | – | 2 | 12 | 2 | 12RW12 | 14" (355mm) | 13" (330mm) | 2-5/8" (67mm) | 9" (229mm) | 19 | |
| 12BCNY4-3 | 54 | – | – | – | 3 | 12 | 1 | 12RW12 | 14" (355mm) | 13" (330mm) | 2-5/8" (67mm) | 9" (229mm) | 20 | |

ORDERING INFORMATION - NATIONAL

| Family | Capacity in Watts (Hours) | | | | Number of Heads | Watts per Head | Max Remote Heads | Replacement Lamp | Dimensions (mm) | | | | Shipping Weight | |
|---------|---------------------------|----|----|---|-----------------|----------------|------------------|------------------|------------------|-----------------|----------------|------------------|-----------------|--|
| | 1.5 | 2 | 3 | 4 | | | | | A | B | C | D | | |
| 6 VOLT | | | | | | | | | | | | | | |
| 6BC10 | 10 | – | – | – | 2 | 5.4 | – | 6RW5 | 9-15/16" (252mm) | 13-3/8" (340mm) | 2-7/16" (62mm) | 4-15/16" (125mm) | 6 | |
| 6BC15 | 15 | – | – | – | 2 | 7.2 | – | 6RW7 | 9-15/16" (252mm) | 13-3/8" (340mm) | 2-7/16" (62mm) | 4-15/16" (125mm) | 8 | |
| 6BC18 | 18 | 15 | – | – | 2 | 9 | – | 6RW9 | 14" (355mm) | 10" (254mm) | 2-5/8" (67mm) | 9" (229mm) | 10 | |
| 6BC27 | 27 | 22 | 18 | – | 2 | 9 | – | 6RW9 | 14" (355mm) | 10" (254mm) | 2-5/8" (67mm) | 9" (229mm) | 13 | |
| 12 VOLT | | | | | | | | | | | | | | |
| 12BC54 | 54 | 44 | 36 | – | 2 | 12 | 2 | 12RW12 | 14" (355mm) | 13" (330mm) | 2-5/8" (67mm) | 9" (229mm) | 19 | |

OPTIONS AND ACCESSORIES

| Options: Add to catalog number Description | Code | Accessories: Add to catalog number Description | Code |
|---|------|--|------|
| No Heads | 0 | Cord Sets | |
| One Head | 1 | 120 Volt | 3 CP |
| Three Heads | 3 | 277 Volt (specify male plug type) | 3 OP |
| Voltmeter (1) | V | Mounting Bracket (specify model to be used with) | MB1 |
| Ammeter (1) | A | Mounting Shelf (specify model to be used with) | MS |
| Time Delay | TD | Note: MB1 and MS are not available on Catalog #6BC10 and 6BC15 | |
| Non Standard Voltages (consult factory) | | | |
| New York City Approved | NY | Wire Guards (consult factory) | |

HALOGEN LAMP OPTIONS

*Only available with OS Head

| Unit | Watt Lamp Only | Replacement Lamp Number |
|---------------------|----------------|-------------------------|
| 6 Volt (all units) | 12 | 6 HB 12* |
| 12 Volt (all units) | 12 | 12 HB 12* |

Remote Fixtures (to order see remote fixtures section)

Notes: When using halogen lamps, total connected lamp load must be at least 80% of 90 min. rating, or premature lamp failure may occur.
N.Y.B.S.A. Calendar (approval) #34013.

(1) Units may NOT be equipped with a voltmeter and ammeter at the same time.