



MR16 Dual Wall Mount **MODEL WM6**

12V, 87W Max. total both lamps, Dual MR16 Halogens

Specifications:

Material: Available in machined 6061-T6 aluminum, C36000 brass, or 304 stainless steel.

Cap: Machined caps come in four styles, lock in place with one 18-8 stainless steel set screw, and are sealed to the body with a high temperature silicone O-ring. Regressed caps have drain holes for water drainage from top of lens. 'Flush Lens' cap styles incorporate a stepped lens to reduce the collection of water and debris on the lens. All caps accept up to three internal accessories, held in place by a stainless steel clip.

Mount Canopy: Available with the following mount options: MO3 (Machined Round Canopy), MO15 (Machined Square Canopy), and MO12 (Surface Mount Powered Canopy). Stem is permanently attached to the mount canopy to prevent loosening. MO3 & MO15 mount options come mounted to a steel universal mounting ring for ease of mounting and adjustment on an industry standard round junction box (box and hardware not supplied). See mount specification sheets for more information. (Mount canopy must be mounted to an appropriate wall or junction box, in such a manner that is capable of holding the weight of the fixture. Junction box and hardware not included).

Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant chromate conversion coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged. Stainless steel model available in three additional metal finishes: Natural, Polished, and Brushed.

Socket: Two GY-6.35 porcelain sockets with 600V, 250°C, PTFE coated 18 ga leads.

Lamp: Two 12 Volt Bi-pin MR16 halogens. (See **Certification** heading for wattage limitations.)

Lens: Each cap contains a tempered, clear lens, secured with a high temperature, UV curing, silicone adhesive. Stepped lens is used in 'Flush Lens' cap style options to reduce the collection of water and debris on the lens.

Certification: CSA tested & certified to US and Canadian safety standards for wet location wall mount use (UL1598):

MO12 Mount Options

WM6A (w/o transformer) - 87W Max.*

WM6A (w/ transformer) - 55W Max.*

WM6B - 40W Max.*

WM6S - not available.

MO3 and MO15 Mount Options


WM6A (remote transformer) - 55W Max.*

WM6A (transformer in junction box) - 40W Max.*

WM6B - 40W Max.*

WM6S - 40W Max.*

* -maximum MR16 Halogen wattage total for both lamps.

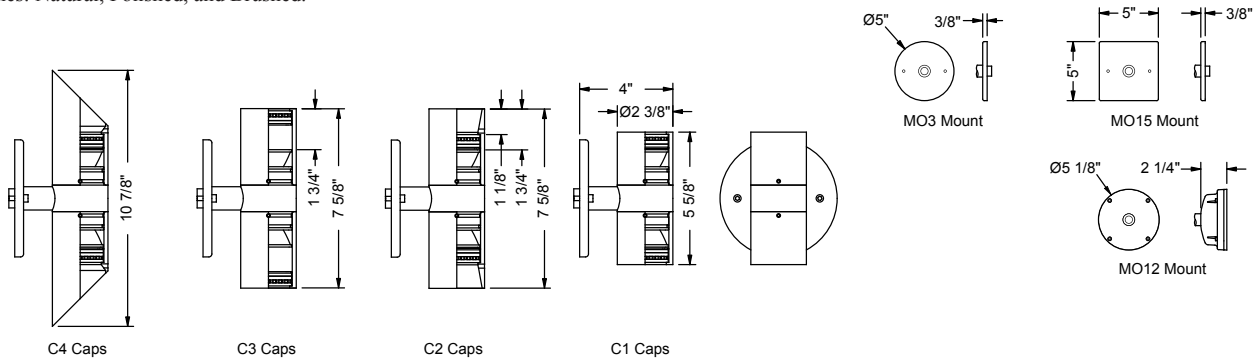

Ordering Information:

Model	Finish	Cap Style ²	Mount ¹	Lamp ^{2,4,5}	Lens Accy ^{2,5}	Filter ^{2,5}	Louver ²
WM6A - Aluminum	BL - Black	(Up/Down)	MO3 - Round Canopy	0 - None	0 - None	0 - None	0 - None
WM6B - Brass	BLT - Textured Black	Standard Lens:	MO15 - Square Canopy	MR16 Halogen:	L1 - Spread Lens	F1 - Red	F5 - Amber
WM6S - Stainless	BN - Bronze	C1 - Flush	MO12 - Surface Mount Canopy ³	01 - ESX, 20W, 12° Narrow Spot	L2 - Linear Lens	F2 - Blue	F6 - Pink
	BNT - Textured Bronze	C2 - Regress Lens	MO12-75-120 - MO12 w/ 75W, 120V transformer ³	02 - BAB, 20W, 40° Flood	L3 - Softening Lens	F3 - Light Blue	F7 - Mercury Vapor
	BAT - Textured Bark	C3 - Regress Lamp	MO12-75-230 - MO12 w/ 75W, 230V transformer ³	03 - FRB, 35W, 12° Narrow Spot			
	WI - White	C4 - 45° Angled	MO12-75-277 - MO12 w/ 75W, 277V transformer ³	04 - FRA, 35W, 23° Narrow Flood			
	GRT - Textured Green	Flush Lens:		05 - FMW, 35W, 40° Flood			
	SI - Silver	C1F - Flush		06 - EYR, 42W, 12° Narrow Spot			
	GY - Grey	C2F - Regress Lens		07 - EYS, 42W, 25° Narrow Flood			
	BE - Beige	C3F - Regress Lamp		08 - EYP, 42W, 40° Flood			
	GNT - Textured Granite	C4F - 45° Angled		09 - EXT, 50W, 13° Narrow Spot			
	SAT - Textured Sand			10 - EXZ, 50W, 26° Narrow Flood			
	PAT - Textured Patina			11 - EXN, 50W, 40° Flood			
	EAT - Textured Earth			12 - FNV, 50W, 60° Wide Flood			
	CLA - Clear Anodized (WM6A only)						
	NAT - Natural (WM6B & WM6S only)						
	POL - Polished (WM6B & WM6S only)						
	AGE - Aged (WM6B only)						
	BRU - Brushed (WM6S only)						

- Notes:**
- See MO3, MO12, MO13, or MO15 specification sheet for mount details.
 - Specify Cap, Lamp, Lens Accy, Filter, and Louver options for the up and down position. See ordering example below.
 - MO12 mount option not available with WM6S.
 - Allowable wattage depends on model and mount. See **Certification** heading above.
 - LED lamps available separately. Contact your Vision3 lighting CSR. ('Lens Accy' & 'Filter' options should not be used with LED lamps.)
 - Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **WM6A - SI - C2F/C2 - MO15 - 01/01 - L1/0 - 0/0 - H1/0**