



PAR16/PAR20 Dual Wall Mount MODEL WM7

120V, 100W Max. total both lamps, Dual PAR16/PAR20 Halogens

Specifications:

Material: Available in machined 6061-T6 aluminum or C36000 brass.

Cap: Machined caps come in four styles, lock in place with one 18-8 stainless steel set screw, and are sealed to the body with a high temperature silicone O-ring. Regressed caps have drain holes for water drainage from top of lens. All caps accept up to three internal accessories, held in place by a stainless steel clip.

Mount Canopy: Available with the following mount options: MO3 (Machined Round Canopy), MO15 (Machined Square Canopy), and MO12 & MO13 (Surface Mount Canopies). Stem is permanently attached to the mount canopy to prevent loosening. MO3 & MO15 mount options come mounted to a steel universal mounting ring for ease of mounting and adjustment on an industry standard round junction box (box and hardware not supplied). See mount specification sheets for more information. (Mount canopy must be mounted to an appropriate wall or junction box, in such a manner that is capable of holding the weight of the fixture. Junction box and hardware not included).

Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant chromate conversion coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged.

Socket: Two medium base porcelain lamp holders with copper alloy, nickel-plated screw shell and center contact, and 600V, 250° C, PTFE coated 18 ga leads.

Lamp: Two 120 Volt medium base PAR16/PAR20 Halogen lamps. (See **Certification** heading for wattage limitations.)

Lens: Each cap contains a tempered, clear lens, secured with a high temperature, UV curing, silicone adhesive.

Certification: CSA tested & certified to US and Canadian safety standards for wet location wall mount use (UL1598):

MO12 and MO13 Mount Options:


WM7A - 100W Max. total both lamps, PAR16/PAR20 Halogen.

WM7B - 100W Max. total both lamps, PAR16/PAR20 Halogen.

MO3 and MO15 Mount Options:

WM7A - 100W Max. total both lamps, PAR16/PAR20 Halogen.

WM7B - Not rated for use with halogen lamps.

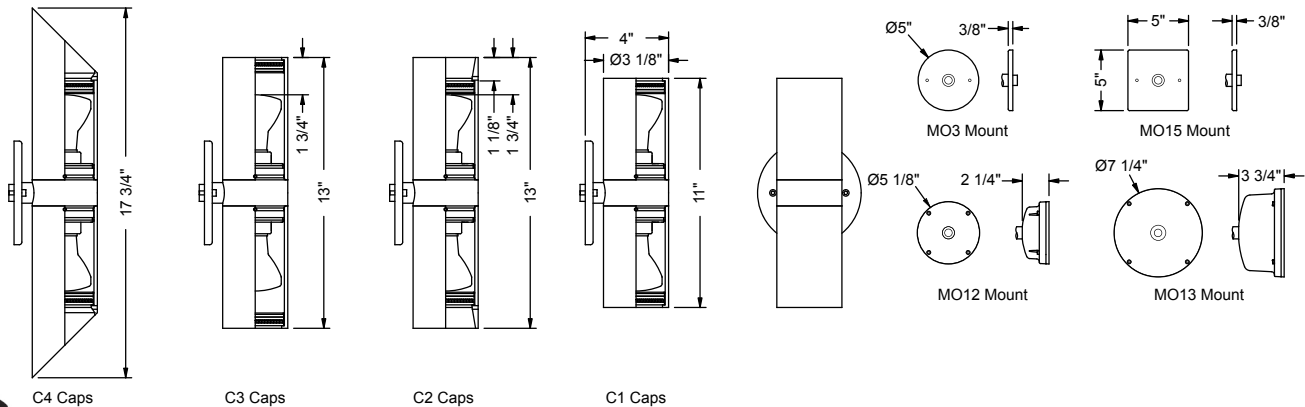

Ordering Information:

Model	Finish	Cap Style ² (Up/Down)	Mount ¹	Lamp ^{2,3,5} (Up/Down)	Lens Accy ^{2,5} (Up/Down)	Filter ^{2,5} (Up/Down)	Louver ^{2,5} (Up/Down)
WM7A - Aluminum	BL - Black	C1 - Flush	MO3 - Round Canopy ⁴	0 - None	0 - None	0 - None	0 - None
WM7B - Brass	BLT - Textured Black	C2 - Regress Lens	MO15 - Square Canopy ⁴	PAR16 Halogen:	L1 - Spread Lens	F1 - Red	H1 - Honeycomb Louver
	BN - Bronze	C3 - Regress Lamp	MO12 - Surface Mount Canopy	26 - 45W, 10° Narrow Spot	L2 - Linear Lens	F2 - Blue	
	BNT - Textured Bronze	C4 - 45° Angled	MO13 - Surface Mount Canopy	27 - 45W, 27° Narrow Flood	L3 - Softening Lens	F3 - Light Blue	
	BAT - Textured Bark			PAR20 Halogen:		F4 - Green	
	WI - White			23 - 50W, 9° Narrow Spot		F5 - Amber	
	GRT - Textured Green			24 - 50W, 16° Spot		F6 - Pink	
	SI - Silver			25 - 50W, 30° Narrow Flood			
	GY - Grey						
	BE - Beige						
	GNT - Textured Granite						
	SAT - Textured Sand						
	PAT - Textured Patina						
	EAT - Textured Earth						
	CLA - Clear Anodized (WM7A only)						
	NAT - Natural (WM7B only)						
	POL - Polished (WM7B only)						
	AGE - Aged (WM7B only)						

- Notes:**
- See MO3, MO12, MO13, or MO15 specification sheet for mount details.
 - Specify Cap, Lamp, Lens Accy, Filter, and Louver options for the up and down position. See ordering example below.
 - Allowable wattage depends on model and mount. See **Certification** heading above.
 - MO3 and MO15 mount options not available with WM7B. See **Certification** heading above.
 - LED & CFL lamps available separately. Contact your Vision3 lighting CSR. ('Lens Accy' & 'Filter' options should not be used with LED lamps. 'Lens Accy', 'Filter', & 'Louver' options not available with CFL lamps unless a 'C3' cap is specified. 'Up' and 'Down' lamps must be of same type.)
 - Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: WM7A - BN - C2/C4 - MO3 - 25/26 - 0/L1 - F2/0 - H1/H1