

DESCRIPTION

The Sure-Lites UEL NEMA 4X Emergency Light is designed for those emergency lighting applications where ruggedness and dependability are a must. The UEL's housing is constructed of durable die cast aluminum combined with the strength of a glass-clear polycarbonate shield. Designed for the most severe environments, the UEL Emergency Light will provide maximum performance against rain, moisture, cold, corrosives and dust. The injection molded, glass-clear polycarbonate shield provides protection against vandalism, as well. The UEL Emergency Light is UL listed for -25°C (-13°F) to +40°C (+104°F) ambient environments.

SPECIFICATION FEATURES

Electrical

- Watchguard EMS Self-Diagnostic System
- Dual Voltage Input, 120/277 VAC, 60Hz, Isolation Transformer
- Push-in AC power connectors facilitate installation
- Line-latching
- Solid-state Voltage Limited Charger
- Low-Voltage Disconnect
- Brownout Circuit
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light
- Photocell Test Switch (requires accessory LASER for activation)
- Fully Recharged in 24 hours

Housing Construction

- Die Cast Aluminum Housing
- Universal pattern knockouts on rear of housing for direct mounting to junction box
- Knockout provided on housing for surface attachment
- Powder Coat Paint Finish
- UV stable, glass-clear

polycarbonate, vandal resistant shield (.150" thick) with Torx head tamperproof screws, stainless steel

- Knockouts provided for conduit entry
- Silicone gasketing
- T-Code=T1 (HAZ only)

Battery

- Sealed Nickel Cadmium
- Maintenance-Free, Long-Life
- Full Recharge Time, 24 hrs. (max)

Code Compliance

- UL924 Listed Self-Diagnostics
- UL924, Outdoor Wet Location Listed (suitable for wet and damp locations)
- UL50, NEMA 4X
- UL844, Hazardous Locations (Class 1, Division 2, Groups A, B, C, D) with "HAZ" option
- Life Safety NFPA 101
- Most State and Local Codes
- NSF, National Sanitation Foundation/Splash Zone (for Food Processing)

- IP66, Ingress Protection from IEC (International Electrical Commission)
- Cleanroom Class 10,000

Warranty

- Unit: 1-Year
- Battery: 7-year pro-rata

Head/Lamp Data

- Two Heads Standard
- 12V 12W MR16 Lamp
- Fully Adjustable



UEL SERIES

ULTIMATE EMERGENCY LIGHT

NEMA 4X

OPTL: CLASS 1 DIV 2

HAZARDOUS LOCATION

SURFACE MOUNT

SEALED NICKEL CADMIUM

BATTERY

MR16 LAMPS



VANDAL PROOF

WATCHGUARD EMS

SELF-DIAGNOSTIC SYSTEM

PATENTS PENDING

EMERGENCY LIGHTING

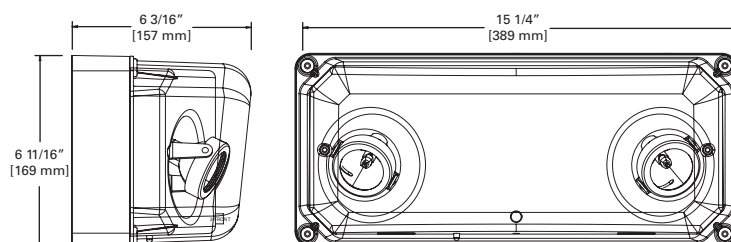

ELECTRICAL RATINGS

Rated Wattage to 87 1/2% of Rated D.C. Voltage			Lamp Information			
Model	DC Voltage	1 1/2 Hours	Type	Wattage	Number	Spacing ¹
UEL1SD	12	24	MR16	12	29-141	50.0'

ORDERING INFORMATION

Sample Number: UEL1WHSD

Series	Housing Finish	Standard	Options	Accessories ¹
UEL1 = Nema 4X Ultimate Emergency Light	=Silver BK = Black	SD = Self Diagnostics	HAZ = Hazardous Location (Class 1, Division 2, Groups A,B,C,D)	LASER = Key Chain, Red Laser Pointer (activation tested at 30 feet). UXPKA = Pendant Adapter Kit (fitting adapts exit to 1/2" NPT threaded pendant-supplied by others) VRSD = No.8 Centerpin Torx Screwdriver

Notes: ¹ Order separately.



ENERGY DATA

Sealed Nickel Cadmium Battery


UEL1SD

Input Current:

120V = .09A

277V = .03A

PHOTOMETRICS

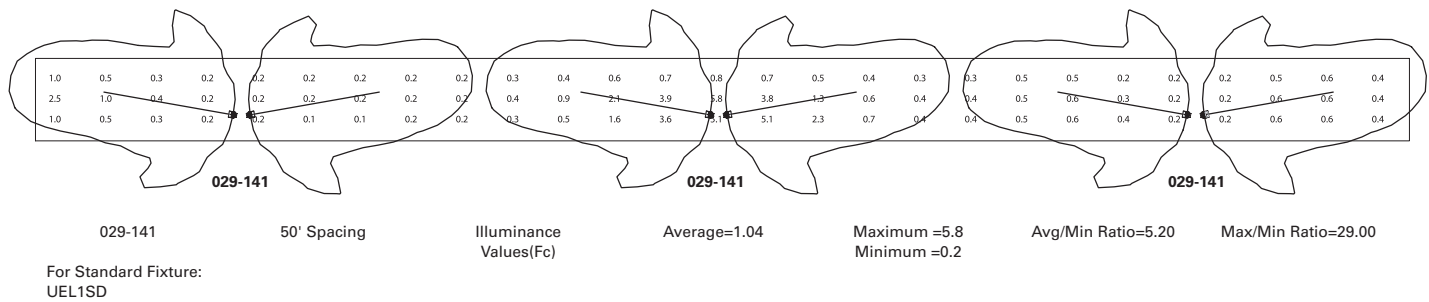

⁽¹⁾The "Rule of Thumb" spacing guidelines are designed to achieve 1 foot-candle average and 0.1 foot-candle minimum with a 40:1 maximum/minimum ratio. The corridor used is 100 feet long, 9 feet ceiling with a 6 feet wide walkway and 3 feet path of egress. The reflectances are 80% ceiling, 50% walls and 20% floors. The fixture mounting height is 7.0 feet with a lamp head angle of 45 degrees. Cooper Lighting assumes no responsibility for local requirements or specific project variables. This is a guideline to be used as a design aid, not as guarantee of any code compliance.

TECHNICAL DATA

Lamps

The UEL Family is offered standard with MR16 lamps. The MR16 lamps provide a bright, even illumination along the path of egress.

Housing

Die cast aluminum with a powder coat painted finish. Universal pattern knockouts are in the back of the housing for direct mounting to the junction box. Conduit entry knockouts are provided. UV stable, polycarbonate shield provides vandal-proof protection. Silicone gasketing provides water-tight, dust-tight NEMA 4X enclosure.

Electronics

Dual voltage input 120/277 VAC is standard. Nickel Cadmium battery is standard. All battery and electrical components are enclosed within the housing.

Photocell Test Switch

Allows verification of proper operation of the transfer circuit and emergency lamps with a laser pointer (laser is sold as an accessory). The emergency lamps will test for 30 seconds when activated.

Self-Diagnostics

The self-diagnostic unit will automatically perform all tests required by UL924, and NFPA 101. The system indicates the status of the unit at all times using the LED indicator near the test switch on the side of the unit. A 90-minute battery power (emergency mode) simulation test will occur randomly once every six months. A 30-second battery power simulation test will occur every 30 days. The charger function is tested upon initial power-up and after every battery discharge cycle thereafter. The AC/DC power transfer circuit is monitored continuously. The charging mode is also monitored. The unit goes into a high charge mode for 24 hours the first time AC power is applied and when a discharge causes the battery voltage to fall below its nominal value. Pressing the test switch causes the unit to use battery power and test the battery capacity for 30 seconds. The LED indicator is off when

the unit is in the emergency mode and on continuously when the unit is fully charged. The LED blinks when the unit is in the high charge mode. It blinks twice (then repeats) when the battery needs to be replaced, or if it is disconnected. It blinks three times if there is a circuit board (charger or AC/DC transfer function) failure, and four times if there is a lamp failure.

Line-Latched

Sure-Lites line-latched electronic circuitry makes installation easy and economical. A labor-efficient AC activated load switch prevents the lamps from turning on during installation to a non-energized AC circuit. Line-latching eliminates the need for a contractor's return to a job site to connect the batteries when the building's main power is turned on.

Solid-State Charger

Supplied with a 120/277 VAC, voltage regulated, solid-state charger, the battery is recharged immediately upon restoration of AC current after a power failure. The charge circuit reacts to the condition of the battery in order to maintain peak battery capacity and maximize battery life. Solidstate construction recharges the battery following a power failure in accordance with UL 924.

Solid-State Transfer

The UEL Emergency Light incorporates solid-state switching which eliminates corroded and pitted contacts or mechanical failures associated with relays. The switching circuit is designed to detect a loss of AC voltage and automatically energizes the lamps using DC power. Upon restoration of AC power, the DC power will be disconnected and the charger will automatically recharge the battery.

Low-Voltage Disconnect

When the battery's terminal voltage falls, the low-voltage circuitry disconnects the lighting load. The disconnect remains in effect until normal utility power is restored, preventing deep battery discharge.

Overload and Short Circuit Protection

The solid-state overload monitoring device in the DC circuit disconnects the lamp load from the battery should excessive wattage demands be made and automatically resets when the overload or short circuit is removed. This overload current protective feature eliminates the need for fuses or circuit breakers for the DC load.

Brownout Circuit

The brownout circuit on Sure-Lites exits monitors the flow of AC current to the unit and activates the emergency lighting system when a predetermined reduction of AC power occurs. This dip in voltage will cause most ballasted fixtures to extinguish causing loss of normal lighting even though a total power failure has not occurred.

Test Switch/Power Indicator Light

A test switch located on the inside cover of the unit permits the activation of the emergency circuit for a complete operational systems check. The Power Indicator Light provides visual assurance that the AC power is on.

Sealed Nickel Cadmium Battery

Sure-Lites sealed nickel cadmium batteries are maintenance-free with a life expectancy of 15 years. The sealed, rechargeable nickel cadmium battery offers high discharge rates and stable performance over a wide range of temperatures. The specially designed resealable vent automatically controls cell pressure, assuring safety and reliability. This battery is best suited for harsh ambient temperatures because the electrolyte is not active in the electrochemical process.

Warranty

This Sure-Lites UEL Emergency Light is backed by a firm, one (1) year warranty against defects in material and workmanship. Maintenance-free, long-life, sealed nickel cadmium batteries carry a seven-year, pro-rata warranty.

NATIONAL ELECTRICAL CODE (NEC)

The National Electrical Code (NEC) defines a hazardous location as “a location where fire hazards or explosion hazards may exist due to flammable gases or vapors, flammable liquids, combustible dust or ignitable fibers or filings.”	The Code further separates these hazardous locations into three classes: Class I – locations containing gases and vapors Class II – locations containing dust Class III – locations containing fibers and filings.	Each of these classes is broken into divisions. These divisions are separated into groups according to characteristics. The UEL-HAZ Series is rated for Class 1, Division 2, Groups A, B, C, D only.
---	---	---

The following chart summarizes these classifications:

Class	Division	Group
I Gas	2 Potential Exists – May be present in atmosphere	A Acetylene B Flammable gas, flammable liquid-produced vapor, or combustible liquid-produced vapor mixed with air that may burn or explode, having either a maximum experimental safe gap (MESG) value less than or equal to 0.45 mm or a minimum igniting current ratio (MIC ratio) less than or equal to 0.40. (Example material is hydrogen) C Flammable gas, flammable liquid-produced vapor, or combustible liquid-produced vapor mixed with air that may burn or explode, having either a maximum experimental safe gap (MESG) value greater than 0.45 mm and less than or equal to 0.75 mm, or a minimum igniting current ratio (MIC ratio) greater than 0.40 and less than or equal to 0.80. (Example material is ethylene) D Flammable gas, flammable liquid-produced vapor, or combustible liquid-produced vapor mixed with air that may burn or explode, having either a maximum experimental safe gap (MESG) value greater than 0.75 mm or a minimum igniting current ratio (MIC ratio) greater than 0.80. (Example material is propane)