



PAR20 Metal Halide Dual Wall Mount **MODEL WM10**

39W Max. each lamp, Dual PAR20 Metal Halides

Specifications:

Material: Available in machined 6061-T6 aluminum or C36000 brass.

Cap: Machined caps come in four styles, lock in place with one 18-8 stainless steel set screw, and are sealed to the body with a high temperature silicone O-ring. Regressed caps have drain holes for water drainage from top of lens. All caps accept up to three internal accessories, held in place by a stainless steel clip.

Mount Canopy: Available with the following mount options: MO3 (Machined Round Canopy), MO15 (Machined Square Canopy), and MO12 & MO13 (Surface Mount Powered Canopies). Stem is permanently attached to the mount canopy to prevent loosening. MO3 & MO15 mount options come mounted to a steel universal mounting ring for ease of mounting and adjustment on an industry standard round junction box (box and hardware not supplied). See mount specification sheets for more information. (Mount canopy must be mounted to an appropriate wall or junction box, in such a manner that is capable of holding the weight of the fixture. Junction box and hardware not included).


Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant chromate conversion coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes: Natural, Polished, and Aged.

Socket: Two medium base porcelain lamp holders with copper alloy, nickel-plated screw shell and center contact, and 600V, 250° C, PTFE coated 18 ga leads.

Lamp: Two medium base PAR20 Metal Halide lamps up to 39 watts. (A remote ballast is required for each lamp.)

Lens: Each cap contains a tempered, clear lens, secured with a high temperature, UV curing, silicone adhesive.

Certification: CSA tested & certified to US and Canadian safety standards for wet location wall mount use (UL1598).

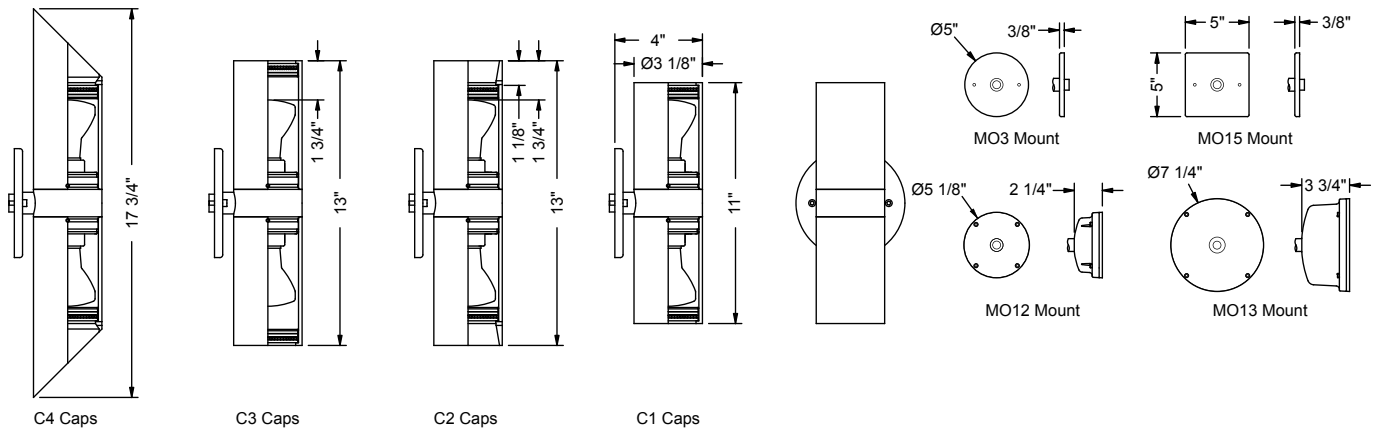

(All Shown with MO3 Mount)

Ordering Information:

Model	Finish	Cap Style ⁴ (Up/Down)	Mount ¹	Lamp ⁴ (Up/Down)	Lens Accy ⁴ (Up/Down)	Filter ⁴ (Up/Down)	Louver ⁴ (Up/Down)	Remote Ballast Catalog String
WM10A - Aluminum	BL - Black	C1 - Flush ²	MO3 - Round Canopy ²	0 - None	0 - None	0 - None	0 - None	Fixture must be specified with one of the following remote ballasts ³ :
WM10B - Brass ²	BLT - Textured Black	C2 - Regress Lens	MO15 - Square Canopy ²	32 - 39W, 10° Spot	L1 - Spread Lens	F1 - Red	H1 - Honeycomb Louver	
	BN - Bronze	C3 - Regress Lamp ²	MO12 - Surface Mount Canopy	33 - 39W, 30° Flood	L2 - Linear Lens	F2 - Blue		BM3 - In Ground Remote Ballast (Two required) ³
	BNT - Textured Bronze	C4 - 45° Angled	MO13 - Surface Mount Canopy		L3 - Softening Lens	F3 - Light Blue		BM4 - Wall Mount Remote Ballast (Two required) ³
	BAT - Textured Bark					F4 - Green		
	WI - White					F5 - Amber		
	GRT - Textured Green					F6 - Pink		
	SI - Silver							
	GY - Grey							
	BE - Beige							
	GNT - Textured Granite							
	SAT - Textured Sand							
	PAT - Textured Patina							
	EAT - Textured Earth							
	CLA - Clear Anodized (WM10A only)							
	NAT - Natural (WM10B only)							
	POL - Polished (WM10B only)							
	AGE - Aged (WM10B only)							

Notes:

- See MO3, MO12, MO13, or MO15 specification sheet for mount details.
- C1 and C3 cap options are not available when the WM10B is specified with MO3 or MO15 mounts.
- See ballast submittal for specifications, limitations, and correct catalog number logic. Ballast type and wattage must match lamp type and wattage.
- Specify Cap, Lamp, Lens Accy, Filter, and Louver options for the up and down position. See ordering example below.
- Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **WM10A - SI - C2/C4 - MO15 - 32/32 - 0/L1 - F2/0 - H1/H1 - Ballast Catalog String**