



CONSTRUCTION

- A** Housing - Consists of a frame made of extruded aluminium and welded on the perimeter of a heavy gauge aluminium roof. An extruded aluminium hook is used to support the electrical components. An angle of 1" by 1" (25 mm by 25 mm) welded on the perimeter of the housing allows to adjust the luminaire and gives it a clean finish.
- B** Lens frame - Built of extruded aluminium parts and equipped with an integrated hinge. A high-strength EPDM gasket ensures sealing of the luminaire and prevents dust from infiltrating.

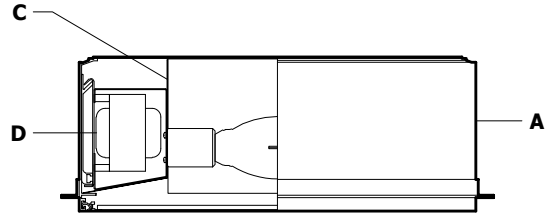

OPTICS

- C** Reflector and lens - The reflector is made of segmented specular aluminium for multi-image duplication of the luminous arc. The lens is made of tempered glass, clear, flat and heat resistant. This system offers a photometric distribution of IES type II, III, IV or V.
- C** Reflector and prismatic lens - The reflector is made of semi-specular aluminium. The lens is made of tempered glass, clear, prismatic and heat resistant. This system offers a symmetrical distribution.
- C** Reflector and drop lens - The reflector is made of semi-specular aluminium. The lens is prismatic and injection moulded in one piece of clear impact resistant polycarbonate or clear UV stabilized acrylic. This system offers a symmetrical distribution.

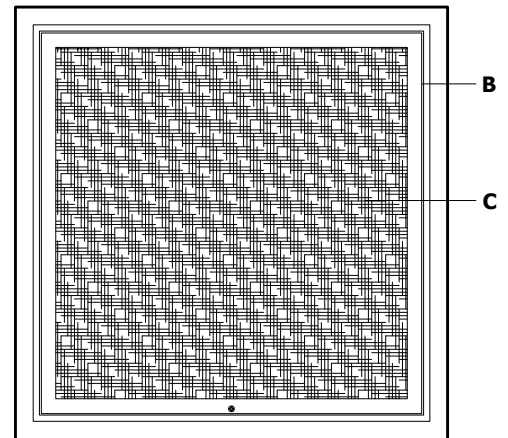

ELECTRICAL COMPONENTS

- D** Ballast - Easily accessible, the ballast is mounted on a removable heavy gauge galvanized steel tray, is equipped with a quick disconnect wiring system and is factory pre wired and tested. It has a high power-factor of 90% or more and is either CWA, CWI, HX, or reactor type. All electrical components are CSA and UL approved. In option, the ballast is available encapsulated.
- Socket - Made of porcelain and 4KV pulse rated. For 175W or less, medium base and for 200W or more, mogul base (lamp not included).

FINISH

- All surfaces are chemically treated against corrosion through a multi-stage immersion process. The polyester powder finish is applied by a thermostatic process offering an excellent protection conforming to ASTM G7, D-2247 and B-117/D-1654 standards. Standard colours are black, bronze and white with a textured finish. Consult SDL's "Colour Selection Guide" for others.

OPTIONS

- Auxiliary quartz system - Designed to actuate the auxiliary lamp during a cold or hot start and automatically disables it when the primary light source reaches an acceptable level of lighting.
- Auxiliary socket - Made of nickel plated metal, of bayonet type for quartz lamp (lamp not included). CSA and UL approved.

HARDWARE

- All exterior hardware is made of stainless steel.

WARRANTY

- This product has a three year warranty on the finish and against any manufacturing defect. The ballast and its components are covered by the manufacturer's warranty. WARRANTY IS VOID IF THE FIXTURE IS RECESSED IN CONCRETE.

Up to 175W
 EPA — **NA**
 Weight — **31lb (14,1 kg)**


200W to 400W
 EPA — **NA**
 Weight — **48 lb (21,8 kg)**

Up to 175W:
 16 x 16" [407 x 407 mm]

200W to 400W:
 22 x 22" [559 x 559 mm]

8 1/2" [215 mm]

Type	Quantity	Model	Distribution	Wattage	Voltage	Colour	Other components
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Submitted on _____ for <input type="checkbox"/> Information <input type="checkbox"/> Approval				Project — _____			
Socket — <input type="checkbox"/> Medium <input type="checkbox"/> Mogul <input type="checkbox"/> _____				Distributor — _____			
Other(s) — <input style="width: 100%;" type="text"/>				Your order # — _____			
				Representative — _____			
				Our order # — _____			

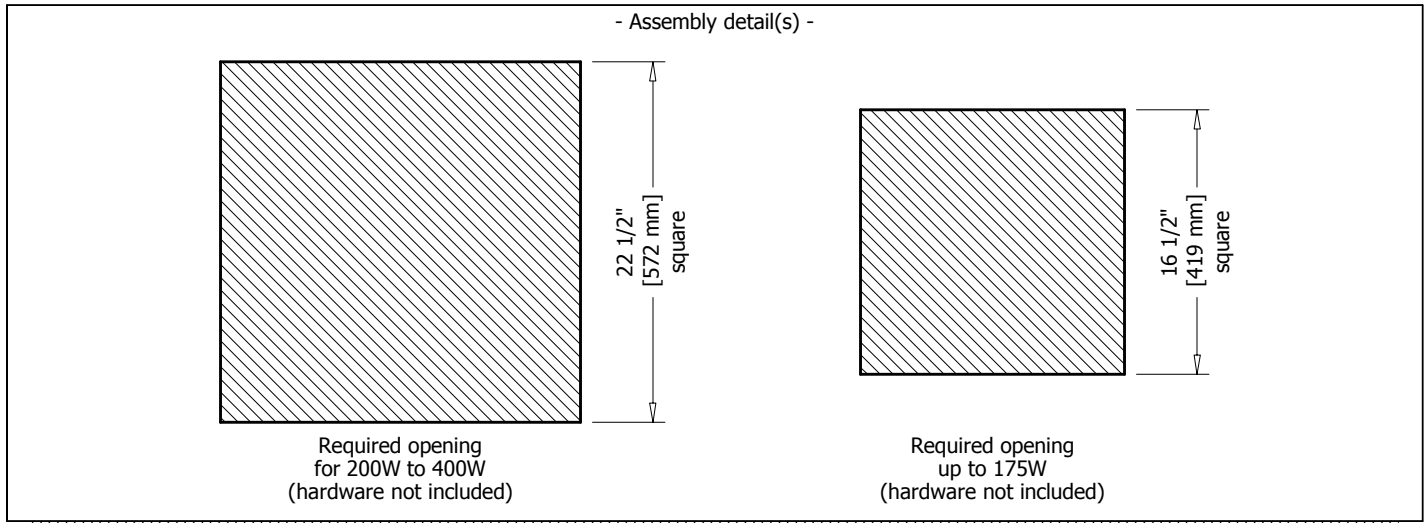

- Specification guide -

IES distribution	Wattage	Voltage	Colour	Other components
<p style="text-align: center;">Reflector</p> <p>Type 2 <input type="checkbox"/> RD2</p> <p>Type 3 <input type="checkbox"/> RD3</p> <p>Type 4 <input type="checkbox"/> RD4</p> <p>Type 5 <input type="checkbox"/> RD5</p>	<p style="text-align: center;">MH</p> <p>175H <input type="checkbox"/></p> <p>250H ● <input type="checkbox"/></p> <p>400H ● <input type="checkbox"/></p>	<p>120 <input type="checkbox"/></p> <p>208 <input type="checkbox"/></p> <p>240 <input type="checkbox"/></p> <p>277 <input type="checkbox"/></p> <p>347 <input type="checkbox"/></p>	<p style="text-align: center;">Standard Colours</p> <p>Textured black <input type="checkbox"/> A11</p> <p>Textured bronze <input type="checkbox"/> B11</p> <p>Textured white <input type="checkbox"/> C11</p>	<p style="text-align: center;">Optional</p> <p>Encapsulated ballast <input type="checkbox"/> EB</p> <p>Auxiliary quartz system <input type="checkbox"/> AS</p> <p>Quartz bayonet socket <input type="checkbox"/> QS</p>
<p style="text-align: center;">Prismatic</p> <p><input type="checkbox"/> MG</p>	<p style="text-align: center;">MH pulse start</p> <p>70P <input type="checkbox"/></p> <p>100P <input type="checkbox"/></p> <p>125P <input type="checkbox"/></p> <p>150P <input type="checkbox"/></p> <p>200P ● <input type="checkbox"/></p> <p>250P ● <input type="checkbox"/></p> <p>320P ● <input type="checkbox"/></p> <p>350P ● <input type="checkbox"/></p> <p>400P ● <input type="checkbox"/></p>		<p style="text-align: center;">Special Colours</p> <p>Textured beige <input type="checkbox"/> D11</p> <p>Silver <input type="checkbox"/> E10</p> <p>Silver charcoal <input type="checkbox"/> E20</p> <p>Textured grey blue <input type="checkbox"/> G11</p> <p>Textured blue <input type="checkbox"/> H11</p> <p>Textured dark blue <input type="checkbox"/> H21</p> <p>Textured dark turquoise <input type="checkbox"/> J11</p> <p>Textured turquoise <input type="checkbox"/> J21</p> <p>Textured forest green <input type="checkbox"/> K11</p> <p>Textured dark forest green <input type="checkbox"/> K21</p> <p>Textured dark green <input type="checkbox"/> K31</p> <p>Fine textured dark green <input type="checkbox"/> K42</p> <p>Textured red <input type="checkbox"/> M11</p> <p>Textured burgundy <input type="checkbox"/> M21</p> <p>Fine textured patina <input type="checkbox"/> X11</p> <p>Custom colour <input type="checkbox"/> CC ★</p>	
<p style="text-align: center;">Drop lens</p> <p>Acrylic <input type="checkbox"/> DA ■</p> <p>Polycarbonate <input type="checkbox"/> DP</p>		<p>Up to 175W: medium socket</p> <p>200W and up: mogul socket</p>		

- ▲ Use ED-18 bulb type
- Use ED-28 bulb type
- ★ Consult manufacturer

■ Not available with 400 watts

IMPORTANT NOTICE

Éclairage SDL inc. disclaims any responsibility for problems that could occur from a combination of third party products with those of Éclairage SDL inc.

Order example — **20R** - **DA** - **175H** - **120** - **A11** - **EB/AS/QS**

Model Distribution Wattage Voltage Colour Other components