

Safety & Installation Instructions

v1.2-04.19

ENG WARNING – RISK OF FIRE AND ELECTRIC SHOCK. THIS PRODUCT IS BEST INSTALLED BY A QUALIFIED ELECTRICIAN. INSTALL IN ACCORDANCE WITH CURRENT NEC WIRING REGULATIONS.

SUITABLE FOR DRY LOCATIONS ONLY

THE FITTING MUST BE GROUNDED. TURN OFF POWER AT THE MAIN FUSE BEFORE COMMENCING INSTALLATION.

FR ATTENTION – RISQUE D'INCENDIE, RISQUE DE CHOC.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

POUR EMPLACEMENTS SECS SEULEMENT

L'APPAREIL DOIT ÊTRE MIS À LA TERRE. COUPEZ LE FUSIBLE PRINCIPAL AVANT DE COMMENCER L'INSTALLATION.


1. Prepare the fitting for installation- consulting the instructions and diagrams on the inside page. Once desired drop of pendant is established, the cable length may be shortened. If cable is desired length already, then skip to instruction point number 3.
2. To shorten cable:-
 - a. Establish required length of cable (ensuring there is some slack) before using wire cutters to cut.
 - b. Remove the outer insulation from the last 6" of the end of the cable, then remove the last 1/4" of inner sleeving from both cables to expose the wire.
 - c. Make sure that when stripping the outer cable no damage occurs to the interior cable.

Wire support assembly: use supplied hex key to loosen the screws of the grip, pull wire through and fully tighten ensuring a firm grip on the wire once desired length achieved. Wire must be shorter than the cable to avoid straining the cable.

3. This fitting should be installed on a 4" junction box (not supplied).
4. Open your existing junction box (if you do not have one in the desired position you will need to get an electrician to install one). If removing an existing fitting first, note all wiring connections: record which of the house wires is connected to the live, neutral and earth (ground) terminals.
5. Attach the fixing plate to your junction box using the two existing bolts.
6. In your junction box there should be two supply wires and one ground wire. Connect your new lamp to the electrical supply using UL approved wire nuts. Connect the live (hot) black wire from the power supply to the black conductor on the luminaire cable, then the white (neutral) wire to the white conductor on the luminaire cable and bare copper or green/yellow ground wire to the ground terminal or green/yellow wire connected to the fitting.

KEY

L = Live (hot)
N = Neutral
⊕ = Earth (ground)

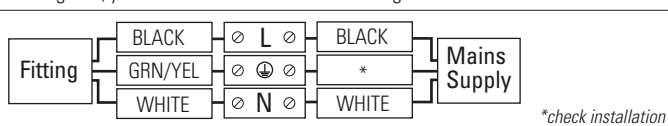

7. Support the fitting so that no strain is applied to the wiring when making the electrical connections. If necessary get a colleague to help.
8. See hanging instructions inside to complete the installation.
9. Fit the correct type and wattage of lamp (or less). Be careful not to overtighten the lamp.
10. Switch on at the fuse-board. Your light fitting is now ready for use.

Other Important Information

Switch off at mains before changing lamp(s). Never fit a lamp of greater wattage than recommended. Ensure children do not play with the light fitting. Dispose of old lamps carefully. Never leave a fitting without a lamp in position (or someone can accidentally touch the contacts). Adjust fitting only when power to the fitting is off and has been left to cool. If the electrical flex or electrical components become damaged at any point, power to the fitting should be disconnected immediately and not operated until the damaged parts are fixed/replaced. For use in dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance

Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Switch off the power to the fitting before cleaning.

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes. All products are hand-assembled in Oxford from high quality components, produced in the UK.

ORIGINALBTC.COM


+44 (0)1993 882 251

UNIT 21 / 22 AVENUE ONE, STATION LANE, WITNEY, OX28 4XZ, ENGLAND




BB1 Pendant, Paxo Pendant, Quay Pendant


Instruction Manual

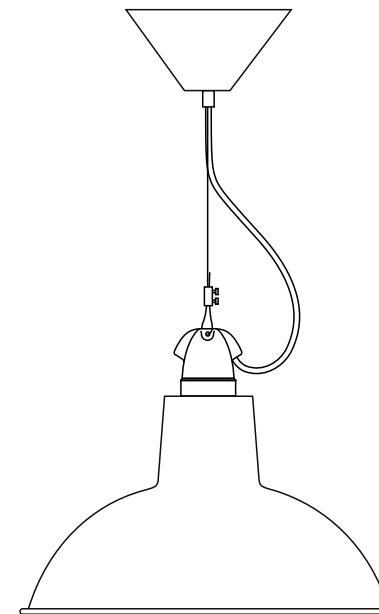


Paxo Pendant Light
FP034

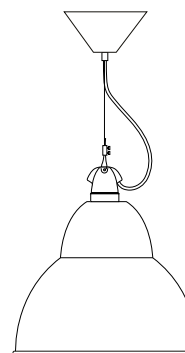

BB1 Pendant Light
US-FP518

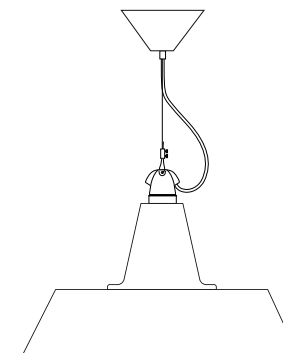

Quay Pendant Light
US-FP036



Quay Small Pendant Light
US-FP467

ORIGINAL BTC

BRITISH LIGHTING MANUFACTURER:
LONDON - NEW YORK - PARIS



BB1, Paxo, Quay Pendant

| 120V ac 60Hz | IP20 |

US-FP518
US-FP034

BB1 Pendant Light
Paxo Pendant Light

US-FP036
US-FP467



Quay Pendant Light
Quay Small Pendant Light

Polished aluminium pendants are ideal for minimalist or industrial interiors. The Codie, Paxo, Quay and BB1 all feature a wide base to provide a good, general spread of background light. The Paxo is also available in white, blue, black and green with a matching painted ceiling rose.

LAMP GUIDANCE			WATTAGE**		
BASE	SHAPE	TYPE*	FP467 only		
E26	A BALL	INCANDESCENT ✓	60W MAX	100W MAX	
		CFL ✓	15W	20W	
		ECO-HALOGEN ✓	n/a	n/a	
		LED ✓	12W	18W	

* Warm white (2700k) low energy lamps recommended.
** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.

PLEASE READ THE INSTRUCTIONS ON THE REVERSE BEFORE YOU BEGIN INSTALLING YOUR LIGHT

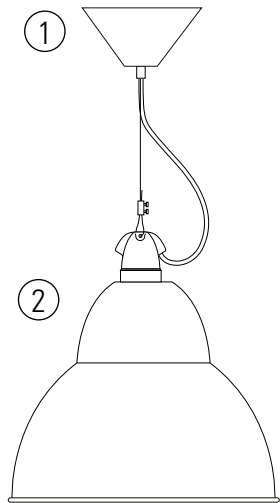


Contents


- 1 Ceiling Rose
- 2 Shade
- 3 Bracket
- 4 Hex key

Tools/Hardware Required

- Screwdriver
- Wire Nuts (5)
- Junction Box (6)



Hanging Instructions

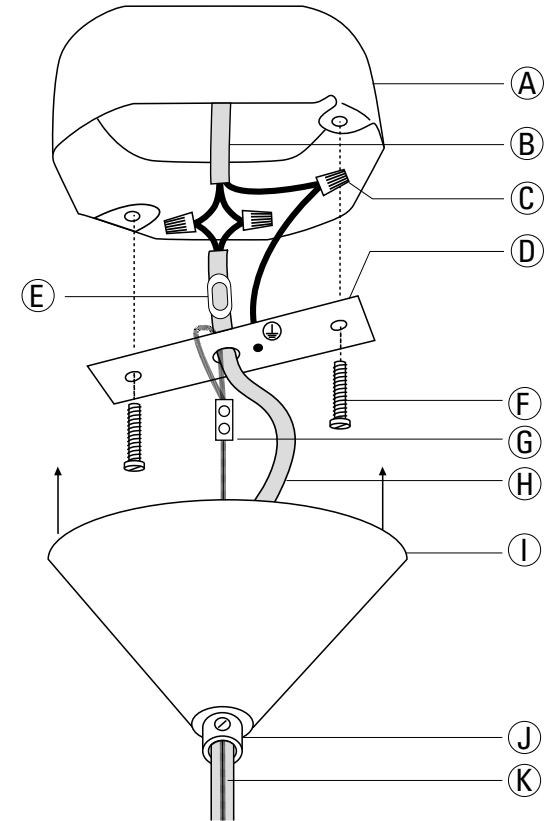

Keys

- A Junction Box*
 - B Main Supply
 - C Wire Nuts*
 - D Mounting Bracket
 - E Cord Restraint
 - F Junction Box Screws*
 - G Cable Grip
 - H Luminaire Cable
 - I Ceiling Rose
 - J Cord Grip
 - K Suspension Wire
- *not supplied

Hanging Instructions

Refer to diagram above.

STEP 1

Determine the required drop of the fitting and adjust luminaire cable (H) and suspension wire length as necessary - see point 2 overleaf. The luminaire cable **MUST** be longer than the suspension wire.

STEP 2

Screw the mounting bracket (D) to the junction box using existing screws.

STEP 3

Make connection to the mains supply (follow instructions overleaf), using suitable wire nuts.

STEP 4

Suspend the luminaire from the mounting bracket using the wire. Push the ceiling rose (I) until it is flush with the ceiling. Tighten the grub screw on the cord grip (J), taking care not to overtighten as this can damage the luminaire.