


NOTE:


- Do **NOT** remove tape!
  - Cords have a 6 ft. length
  - For use on a normally dry work surface.
  - Table thickness is 3/4" MIN. to 1-11/16" MAX.
  - Dimensions for plugs are 1-11/32" X 1-1/32" X 7/8".
  - USB-A ports are for charging use only.
  - Please use applicable adapter from data tree.
- (See PCS data tree page 2 for more information.)

1

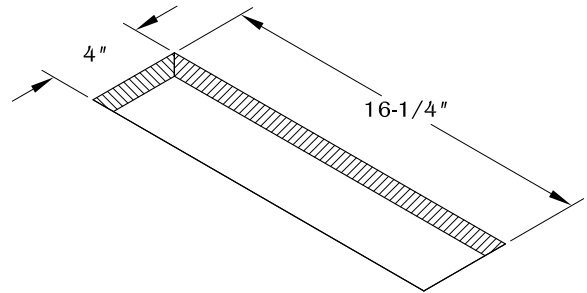


Determine the position and location of the unit on the work surface. Cut the hole at 16-1/4" X 4". Place and allow enough clearance for unit operation. DO NOT place unit where the cables are strained or trapped.

2

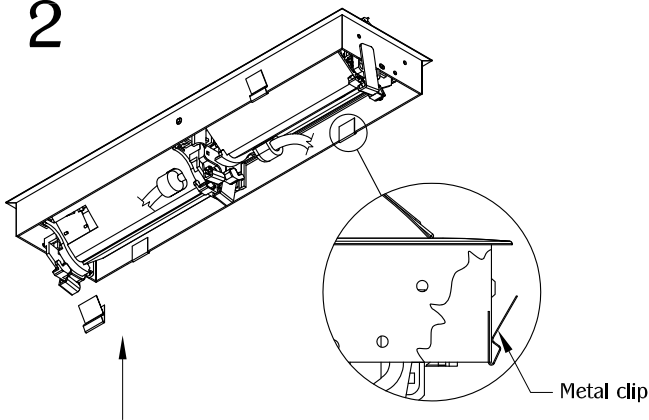


Place the metal clips near the front and back of each side of the unit. (NOTE: Metal clips are for use in hard surface material only as an optional mounting means.)

3

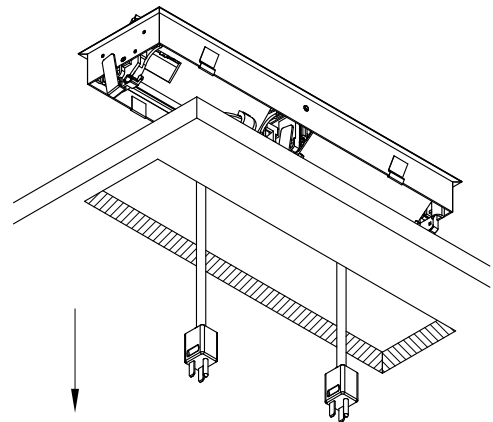


Guide the power cords through the cut out. Install the unit into the cut out and make sure it is fully leveled onto the surface.

4

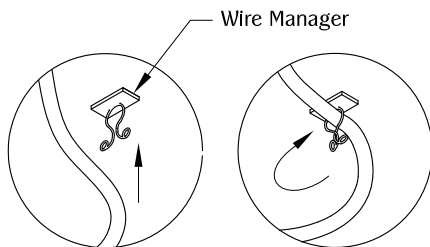


Optional wire manager.

5

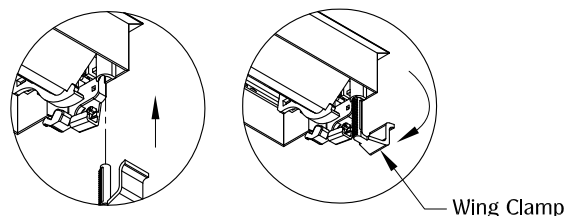

Secure unit by turning bottom wing clamp.

## TABLE OF CONTENTS:



..... 1X PCS36/2S/B



..... 2X Wire manager




..... 4X Metal clip



..... 4X Wing clamp


- 1.) Select the appropriate adapter from the chart below. (example: Panduit Mini-Com Series jack would use "FFF" adapter marked on back of adapter.)

\* Jacks, not included, UL Listed (DUXR) or Recognized (DUXR2) jacks required.

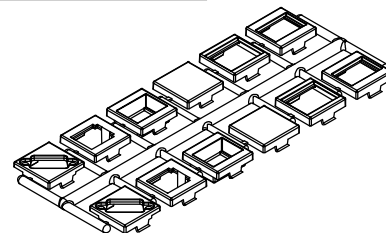

Adapter	Manufacturer	Website
BBB	L-Com Keystone Modular	<a href="http://www.L-Com.com">www.L-Com.com</a>
BBB	NETCONNECT, and 110 Connect Series Modular Jack	<a href="http://www.Anixter.com">www.Anixter.com</a>
BBB	Siemon ZMAX Style	<a href="http://www.Siemon.com">www.Siemon.com</a>
BBB	Allen Tel Versa Tap Series	<a href="http://www.Graybar.com">www.Graybar.com</a>
BBB	Leviton Quick Port ® Series	<a href="http://www.Leviton.com">www.Leviton.com</a>
BBB	Belden REVConnect	<a href="http://www.Belden.com">www.Belden.com</a>
BBB	HDMI Adapter Cable	<a href="http://www.Mockett.com">www.Mockett.com</a>
CCC	Hubbell Nextspeed ™ Keystone Series	<a href="http://www.Hubbell-premise.com">www.Hubbell-premise.com</a>
CCC	ADC Truenet Series	<a href="http://www.Anixter.com">www.Anixter.com</a>
DDD	Blank (no coupler/jack)	-
EEE	Ortronics TracJack Series	<a href="http://www.Ortronics.com">www.Ortronics.com</a>
FFF	Panduit Mini-Com Series	<a href="http://www.Panduit.com">www.Panduit.com</a>
HHH	Video Monitor Jack/DB-15, panel mount solder style	<a href="http://www.Mockett.com">www.Mockett.com</a>

- 2.) Snap Jack into adapter following the instructions provided with the jack.
- 3.) Once assembled, snap adapter into the notched, square holes in the orientation shown.

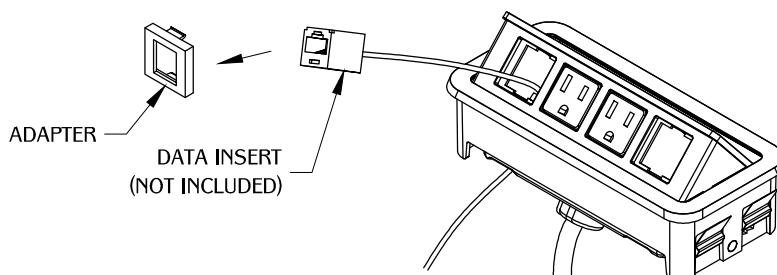

**NOTE:** Please verify fit of jack in adapter before ordering large quantities as manufacturer designs may change without notice.