



Multi-Tap Transformer MODEL XM2
120 VAC, 300/600/1000/1200 Watt Magnetic Transformers

Specifications:


Construction: A landscape lighting transformer with multiple voltage outputs. Multi-tap output is from 11 to 15 Volts in 300, 600, 1000, and 1200 Watts. Packaged in a NEMA 3R rain tight enclosure with enclosed wiring terminals, hinged lockable cover and up to five 1/2" and 3/4" knockouts - bottom and side entry. Optional features include removable timer and built-in photo cell.

- 6' outdoor line cord.
- Multiple voltage output taps, 11-15 Volts.
- Low voltage circuit breaker. 1 circuit breaker per circuit on multiple circuit models.

Certification: UL tested & certified to US and Canadian safety standards.

Specifications:

- 300 Watt - single circuit output. 600 Watt - dual circuit output. 1000 and 1200 Watt - 4 circuit output.
- NEMA style rain tight keyhole mount enclosure with stainless steel finish.
- Wiring compartment with terminals and output tap wires.
- Complete wiring instructions.
- 24-hour removable timer option.
- Built in photo cell option.
- X-10 remote control compatible.

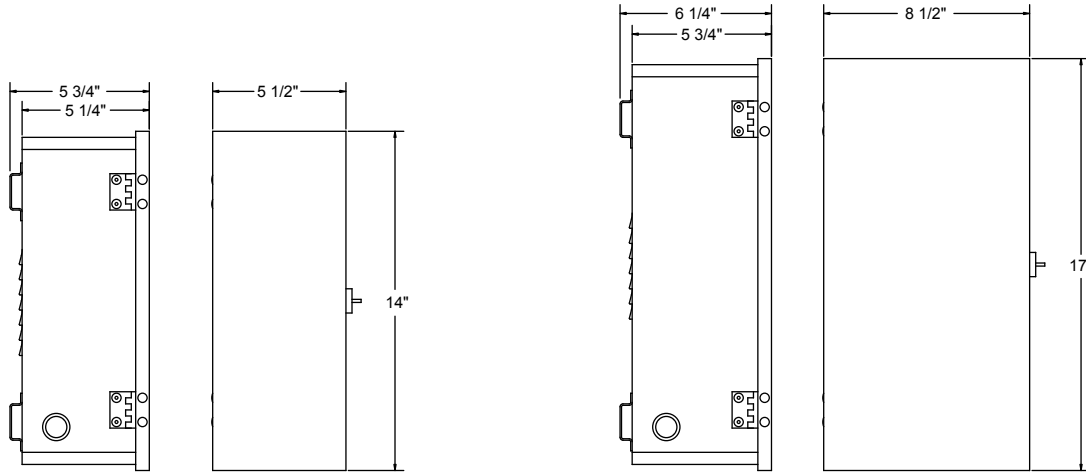

300 Watt

600, 1000, & 1200 Watt

Ordering Information:

Model	Wattage	Voltage	Options
XM2 - Magnetic Transformer	300 - 300 Watts 600 - 600 Watts 1000 - 1000 Watts 1200 - 1200 Watts	120 - 120 Volts	T - 24-hour Removable Timer P - Built in Photocell TP - 24-hour Removable Timer and Built in Photocell

Notes:

1. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **XM2 - 600 - 120**