


SAMPLE CATALOG NUMBER

CB3440 - 2N40(120V) - BA - FUSE
 Model Number Lamping Option (Voltage) Finish Option



Model				Lamping Options	Finish	Options	
Model Number	Dimensions						
CB3440	W	14-7/8"	(378 mm)	2F9	PTD	• CB	• ABA DCC REM XPS
	H	7"	(178 mm)				
	D	7-3/8"	(187 mm)		BB	• SN	
	MC	3-1/8"	(79 mm)		BCA	SNA	
					• BCB		
CB3442	W	19"	(483 mm)	2LF13	PTD	• CB	• ABA DCC • TL • DIM-A XEM FUSE XPS
	H	9"	(229 mm)				
	D	9-1/2"	(241 mm)	2TF26	BB	• SN	
	MC	3-7/8"	(98 mm)	2N60	BCA	SNA	
					• BCB		
CB3444	W	21-1/4"	(540 mm)	2QF26	PTD	• CB	• ABA DCC • TL • DIM-A XEM • DIM-L XPS FUSE
	H	7-1/4"	(184 mm)				
	D	10-1/2"	(267 mm)	2N60	BB	• SN	
	MC	3-1/4"	(83 mm)		BCA	SNA	
					• BCB		

LINE DRAWINGS

CB3440 / CB3442



CB3444

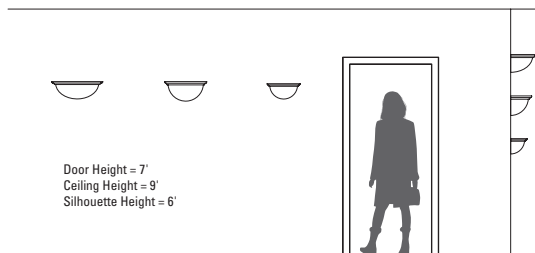

ABBREVIATION KEY

- Indicated Finish or Option is not available with XPS
- ※ Configuration operates TF26 or TF32 lamp options and can be labeled up to the highest wattage allowed

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F9 9w twin tube, G23 base, FLR (120V; 277V)
 - LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - QF26 26w quad, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
 - TF26 26w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
 - ※TF32 32w triple, 4-pin GX24q-3 base, FLR (MVOLT; 347V)
 - N40 40w A-19, medium base, INC (120V)
 - N60 60w A-19, medium base, INC (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- CB Polished Chrome
- PB Polished Brass
- SN Satin Nickel
- SNA Satin Nickel Alternative

Options

- ABA Hand Painted Alabaster Alternative
- DCC Damp clear coat required for all metal finishes in damp locations
- DIM-A Fluorescent dimming, Advance Mark 10, specify voltage
- DIM-L Fluorescent dimming, Compact SE, specify voltage
- FUSE Fusing
- REM Remote emergency battery pack for fluorescent lamping
- TL Top lens, white translucent acrylic
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
- XPS Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3440-2F9		40	
CB3440-2N40		11	
CB3442-2LF13	44	01703	406
CB3442-2N60	12	01704	406
CB3444-2N60	12	01704	406

See report on indicated page for complete detail

Candela Distribution

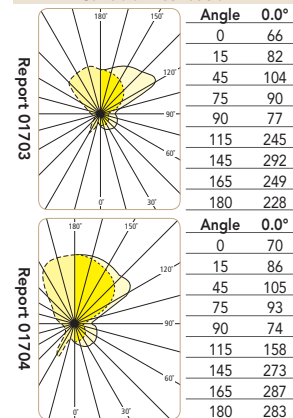



CB3440-BA



CB3444-BA

FEATURES

- 5 year product warranty
- Heavy gauge spun trim rings
- Thermally formed 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lampping
- High power factor electronic ballast (fluorescent lampping, except CB3440)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Mix and match accents and trim from other product designs
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Larger diffuser sizes available



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty