



EPOQUE™ NOUVEAU HIGH BACK BATHING POOL

CAST IRON

EPOQUE™ HIGH BACK BATHING POOL, 60490

- Formed of cast iron construction
- Claw foot legs with levelers
- Customizable tub and feet exterior with enamel based paint
- 45 gallon capacity
- Designed for floor or wall mount tub fillers only

Kit Components:

- ☐ **60290** Tub Only
- ☐ **85081** Tub Legs (4)

Nominal Dimensions:

66-7/8" x 30-3/4" x 32-1/4"
(1700 x 780 x 820mm)

Compliance Certifications –

Meets or Exceeds the Following Specifications:

- ASME A112.19.1M–1994



To Be Specified (Optional):

- ☐ Exposed lever activated drain – (Metal Plated Exposed Pipe)
 - ☐ (Polished Chrome): 85050-00.002; or
 - ☐ (Polished Brass): 85050-00.099; or
 - ☐ (Brushed Nickel): 85050-00.295; or
 - ☐ (Polished Nickel): 85050-00.008


ROUGH IN DIAGRAM AND
PRODUCT SPECIFICATIONS
SHOWN ON REVERSE SIDE

Porcher

EPOQUE™ NOUVEAU

HIGH BACK BATHING POOL

CAST IRON

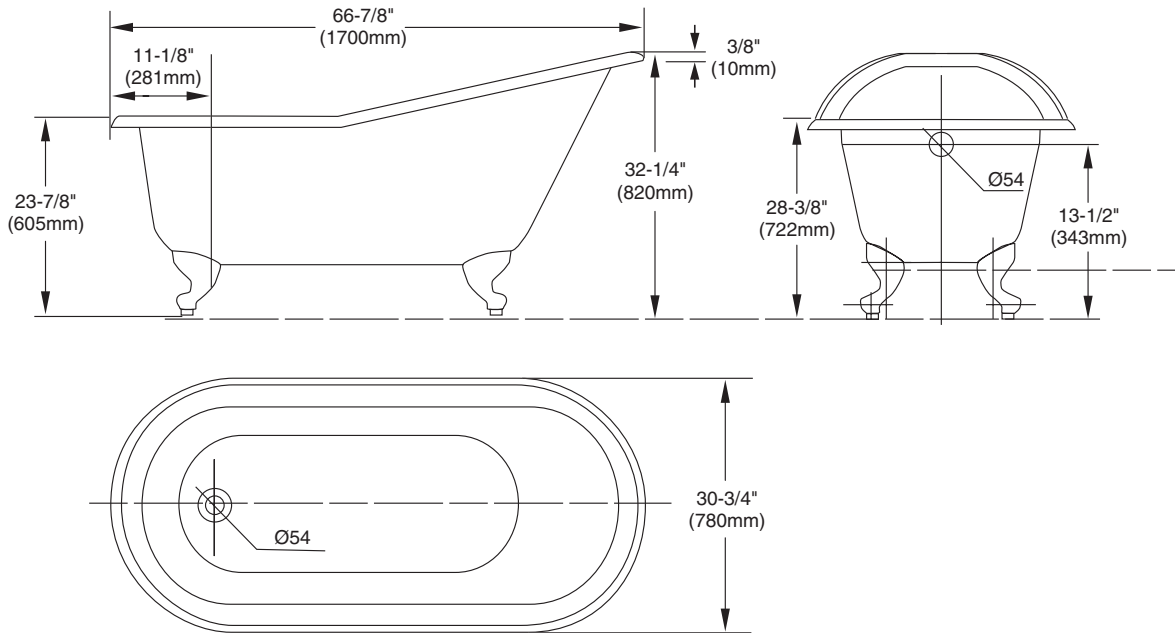

GENERAL SPECIFICATIONS FOR 60490 BATHING POOL

INSTALLED SIZE	66-7/8" x 30-3/4" x 32-1/4" (1698 x 781 x 819mm)
WEIGHT	369 Lbs. (167 Kg)
WEIGHT W/WATER	742 Lbs. (336 Kg)
GALLONS TO OVERFLOW	45 Gal. (170 L)
BATHING WELL AT SUMP	23-3/4" x 49" (602 x 1245mm)
BATHING WELL AT RIM	27-3/4" x 60-5/8" (706 x 1540mm)
WATER DEPTH TO OVERFLOW	12-1/2" (311 mm)
FLOOR LOADING (PROJ. AREA)	72 Lbs./Sq. Ft. (345 Kgs/Sq. m)

NOTES:

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHING POOL FOR ADDITIONAL INFORMATION. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.1M-1994. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.