





FPSM-W-0-AL FPSM-W-1-AL FPSM-W-2-AL
WALL MOUNTS -
LOW PROFILE, SINGLE ARM AND DUAL ARM
Assembly Instructions

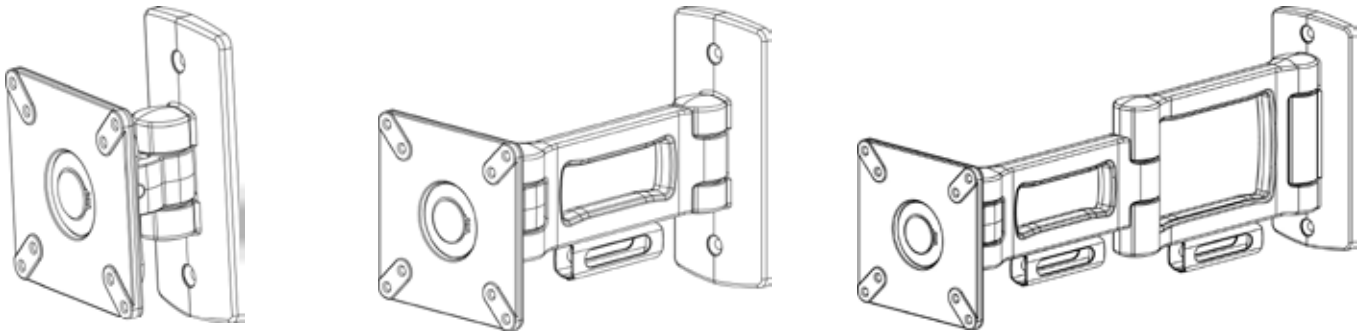

Hardware List


Ref.	Qty.	Part No.	Description
AA	2	030-1177	#12 x 2 1/2" Flat Head Wood Screws
BB	4	030-0845	M4 x 0.7 , 20mm Phillips Pan Head Screws
CC	4	030-1234	M4 x 0.7 , 12mm Phillips Pan Head Screws
DD	1/2*	012-0760	Cable Clips *(1) for FPSM-W-1-AL (2) for FPSM-W-2-AL
	1/2*	012-0815	Cable Clips *(1) for FPSM-W-1-AL (2) for FPSM-W-2-AL
	1	030-0397	3/16" Allen Wrench

CAUTION: This mount is intended to support a LCD monitor having a diagonal screen size of 22.9" and a maximum weight of 25 lbs. Use of any larger size monitors may result in instability causing possible injury. The wall mounting hardware included in your hardware pack is **INTENDED** for **WOOD STUD INSTALLATION ONLY**. For added safety and ease of installation, use a qualified professional to properly install the correct mounting hardware. Bretford will not be liable for the improper use or installation of its products.

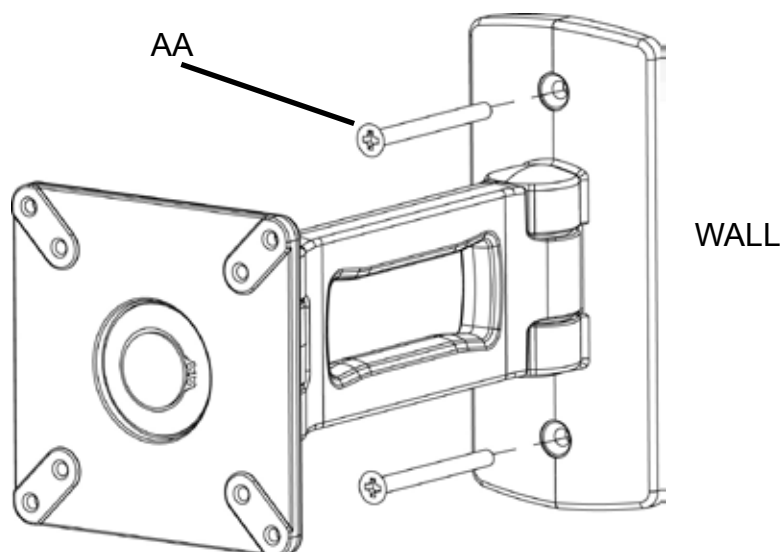

STEP 1

Attach the mount to the wall through a wood stud using hardware (AA) as shown.

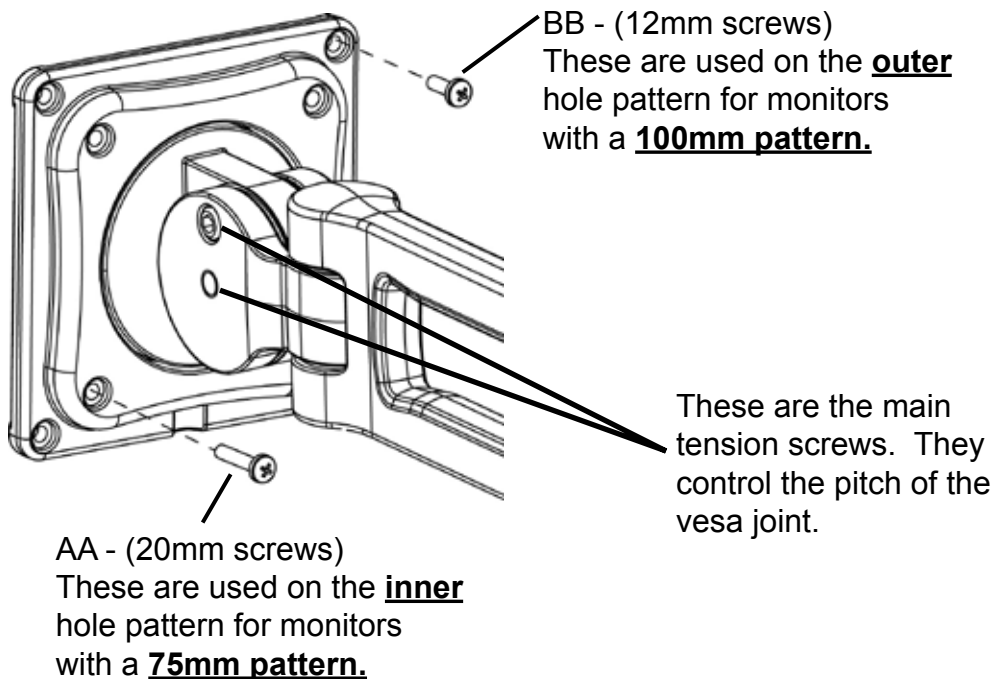


STEP 2

Attach your monitor to the vesa plate with either screws (AA) or (BB) as indicated above.

NOTE: The screws that came with your monitor may be sufficient for mounting to the vesa plate. As long as they are a M4 type screw and sufficient in length.


MODELS FPSM-W-1-AL & FPSM-W-2-AL ONLY

Fold plastic cable clip closed.

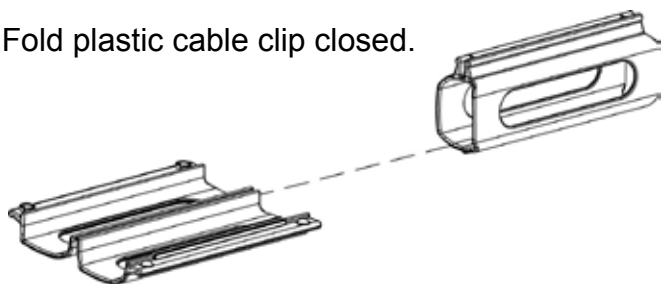

NOTE: 2 different sets of plastic clips are provided for the best possible fit.

Knuckle joints are preset to correct tension. No adjustments are needed.

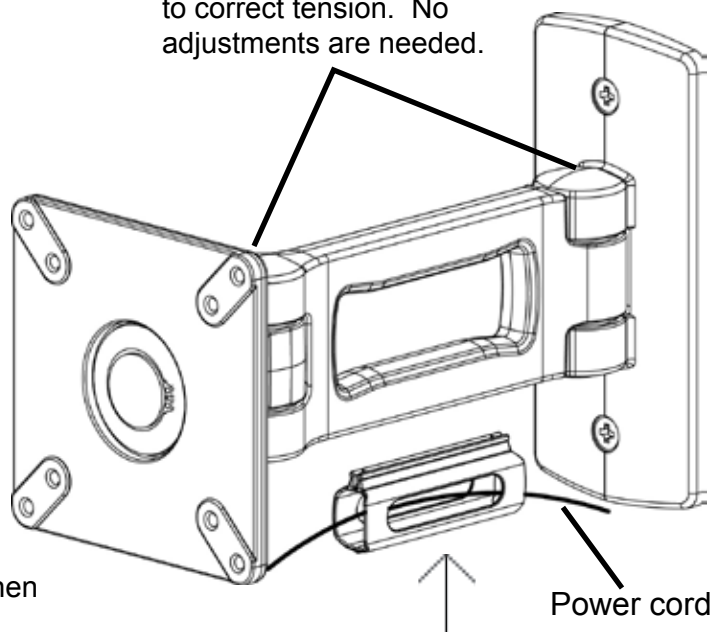

Feed power cord through clip and then snap clip into arm's bottom slot.

Bretford
11000 Seymour Avenue
Franklin Park, IL 60131
TEL: 847.678.2545
800.521.9614
FAX: 847.678.0852
800.343.1779

Bretford Ltd.
2 Etongate
110 Windsor Road, Slough
Berkshire SL1 2JA England
TEL: 011 44 17 5353 9955
FAX: 011 44 17 5353 9478

www.bretford.com