

TETSU SERIES RECTANGLE TUBS

- Acrylic with fiberglass reinforcement
- Available in White 001 and Linen 222 colors
- Center drain location only
- Suitable for undermount applications
- Textured tub bottom pattern
- Drain not included

Components:

- ☐ **60560** 6' Soaker Tub only
- ☐ **60540** 5-1/2' Soaker Tub only
- ☐ **60520** 5' Soaker Tub only

Nominal Dimensions:

6' Soaker Tub
42" x 72" x 23"
(1829 x 1067 x 584mm)

5-1/2' Soaker Tub
36" x 66" x 23"
(1676 x 914 x 584mm)


5' Soaker Tub
32" x 60" x 23"
(1524 x 813 x 584mm)



To Be Specified (Required):

- ☐ Color: White only
- ☐ Bath Filler: (specify finish)
- ☐ Rotary Drain (chrome): 85020

ROUGH IN DIAGRAM AND
PRODUCT SPECIFICATIONS
SHOWN ON REVERSE SIDE

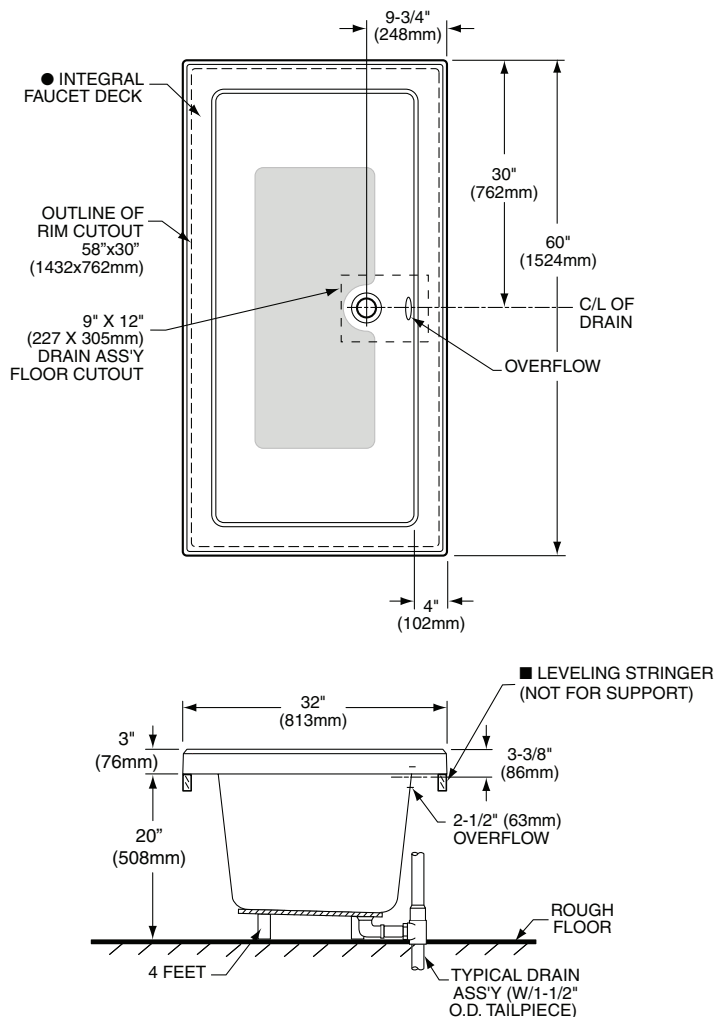

GENERAL SPECIFICATIONS FOR 60520 BATHING POOL

INSTALLED SIZE	60" x 32" x 23" (1524 x 813 x 584mm)
WEIGHT	57 Lbs. (26 Kg.)
WEIGHT w/WATER	597 Lbs. (271 Kg.)
GALLONS TO OVERFLOW	54 Gal. (246 L.)
BATHING WELL AT SUMP	38" x 18-1/2" (965 x 470mm)
BATHING WELL AT RIM	52" x 24" (1321 x 610mm)
WATER DEPTH TO OVERFLOW	15-1/8" (384mm)
FLOOR LOADING	45 Lbs./Sq.Ft. (219 Kg./Sq.m)

NOTES:

BATH TO BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY 4 FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

● IF INSTALLING A DECK-MOUNTED FAUCET, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.