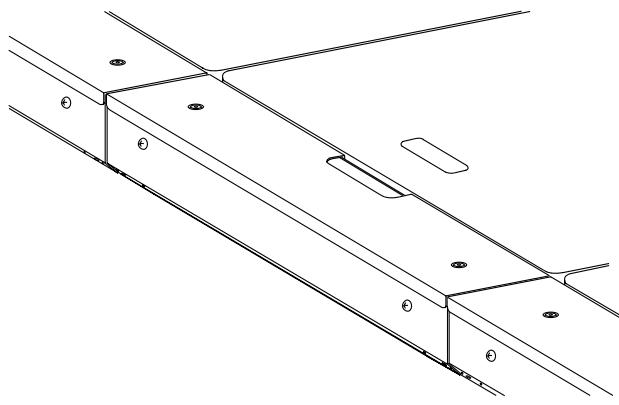


**BRETFORD****35PBR24****POWERBAR® TABLE
TOP BRIDGE**

Assembly Instructions

**PARTS LIST**


Qty	Part#	Description
1	022-1985	Wire Bin (24)
1	3557-GM	Flat Connecting Plate Pack
2	017-0610	Square Tubes
2	010-3173	Cover Mounting Bracket
1	010-3174	Cover (24)
1	010-3172	Bin Plate
2	010-3197	Ganging Clip

HARDWARE LIST


Qty	Ref	Part#	Description
2	AA	030-0402	10-32 x 5/8" Combo Screw
4	BB	030-0354	#10-32 x 1 1/2" Button Head Allen Screw
2	CC	030-0422	#5/16-18 x 1/2" Phillips Head Screw
2	DD	030-0474GM	#1/4-20 x 7/8" Flat Head Allen Screw
4	EE	030-0302	#8-32 x 3/8" Combo Head Screw
4	FF	02236	#8-32 Hex Nut-Serrated

TOOLS REQUIRED



Phillips Screwdriver
5/32 Allen Wrench (supplied)
1/8 Allen Wrench

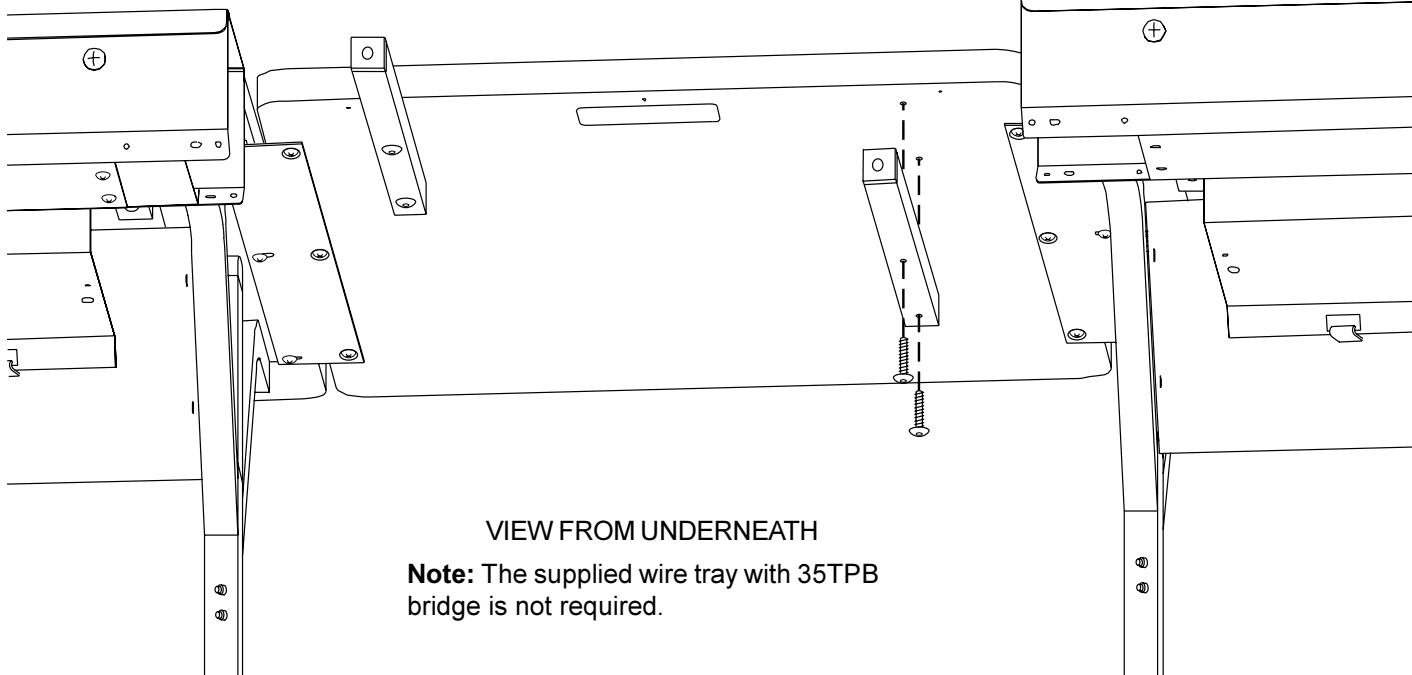**STEP 1**

Attach (2) support tubes with #10-32 x 1 1/2" allen head screws (BB).





BB

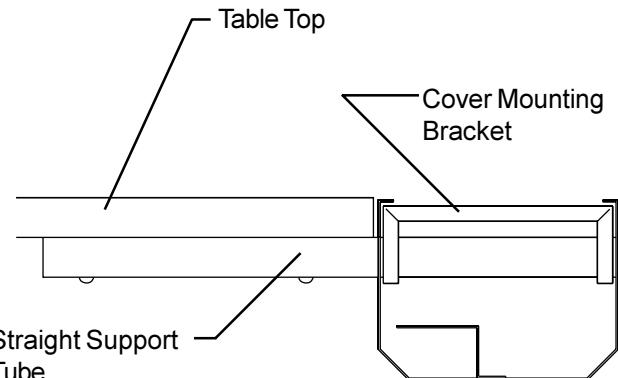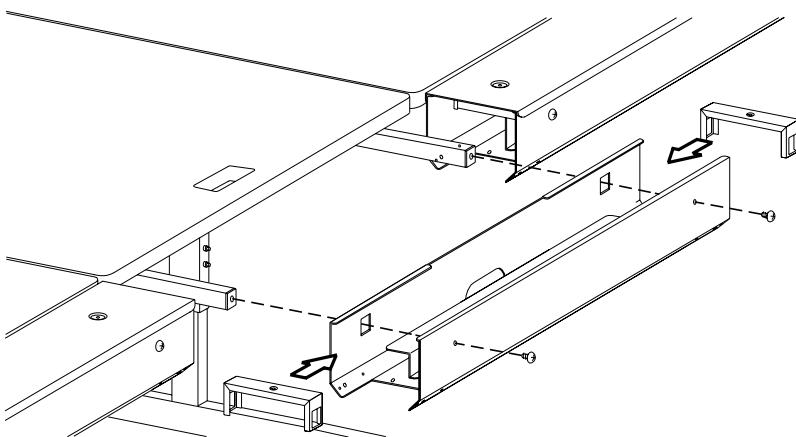

SIDE VIEW OF BIN ASSEMBLY


STEP 2

Position bin with (2) square cutouts in line with the straight support tubes. Slide the bin just onto the support tubes. Insert both cover mounting brackets from the side opening of bin. Adjust the bin so one of cover mounting brackets fit onto support tubes and slide bin in while aligning second hole in cover mounting brackets into the support tubes. (Note: the cover mounting brackets have a loose fit). Install the (2) screws (CC) into the threaded plastic insert on the end of the support tubes. **Do not over tighten.**

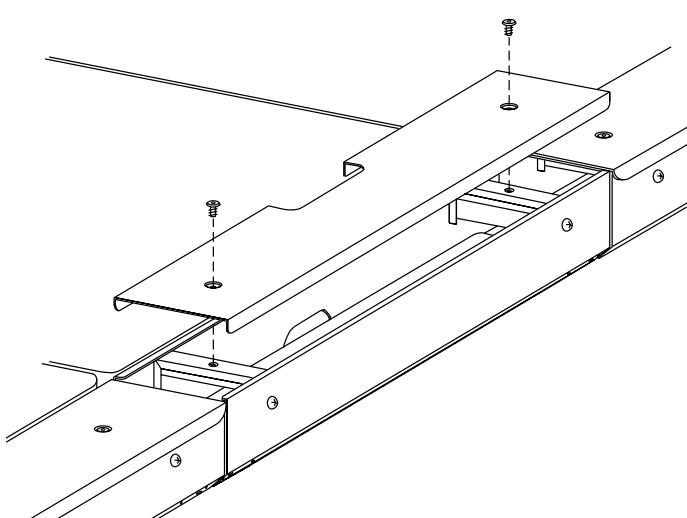



STEP 3


Attach bin cover using 1/4-20 x 7/8" flat head allen screws (DD) as shown.

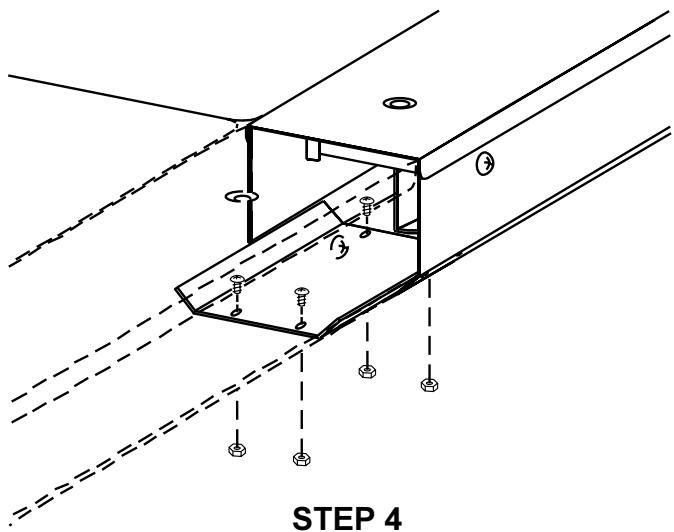

STEP 4


The supplied flat plate (Bin Plate) is used when two Power Bars™ are bridged together end to end. Use #8-32 x 3/8" screws (EE) and #8-32 hex nut (FF) to secure plate to bin. **Note:** The existing Power Bar™ tables used on either side of Top Bridge were supplied with Bin Plates.



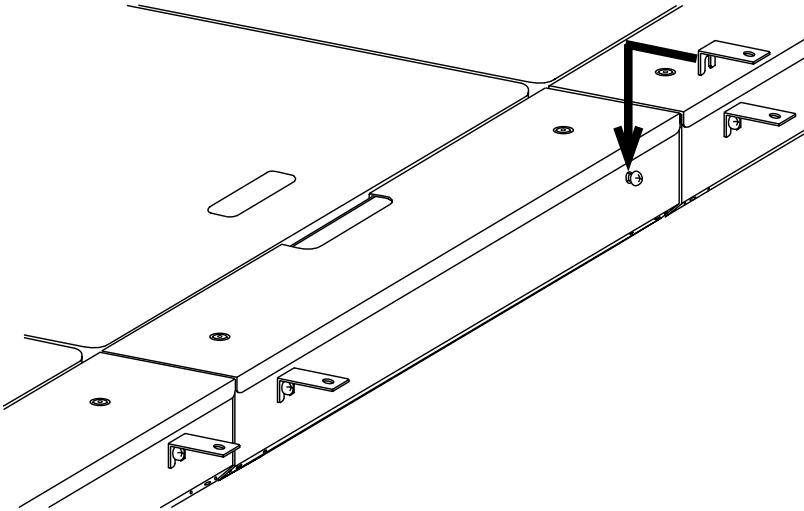

STEP 5

The supplied Ganging Clips are used when another bridge top table assembly (without a Power Bar™) is to be joined back to back. **Do not discard the clips.** Save clips for future use (store in wire bin). Loosen the 5/16-18 x 1/2" screws on the bin front enough to slide the Joining Clips on. Then tighten screws.

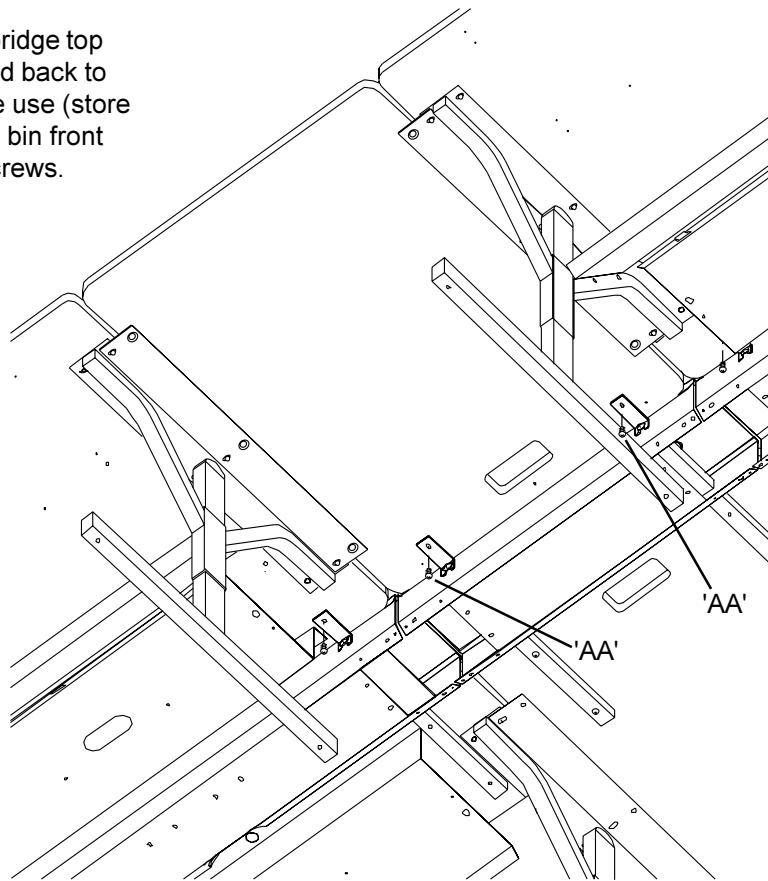

STEP 6

Butt the table assembly up against the Power Bar™ table assembly and align the clip mounting holes with the table mounting holes underneath. Insert #10-32 x 5/8" screws (AA) and tighten.

Note: Your existing Power Bar™ tables were supplied with ganging clips and mounting hardware (shown above being installed).

Bretford
11000 Seymour Avenue
Franklin Park, IL 60131
TEL: 847.678.2545
800.521.9614
FAX: 847.678.0852
800.343.1779

www.bretford.com

Bretford Ltd.
Technology House
7 Lake End Court, Taplow
Bucks SL6 0JQ England
TEL: 01628 603558
FAX: 01628 604923

Part #031-3224
Rev.11.14.00 YP