



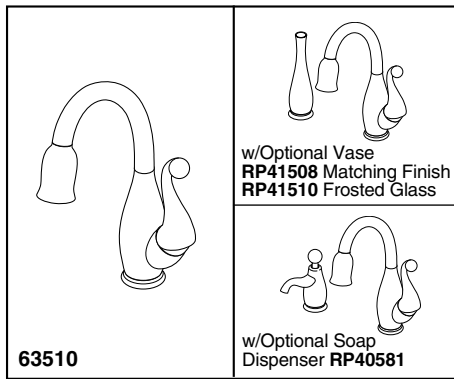

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

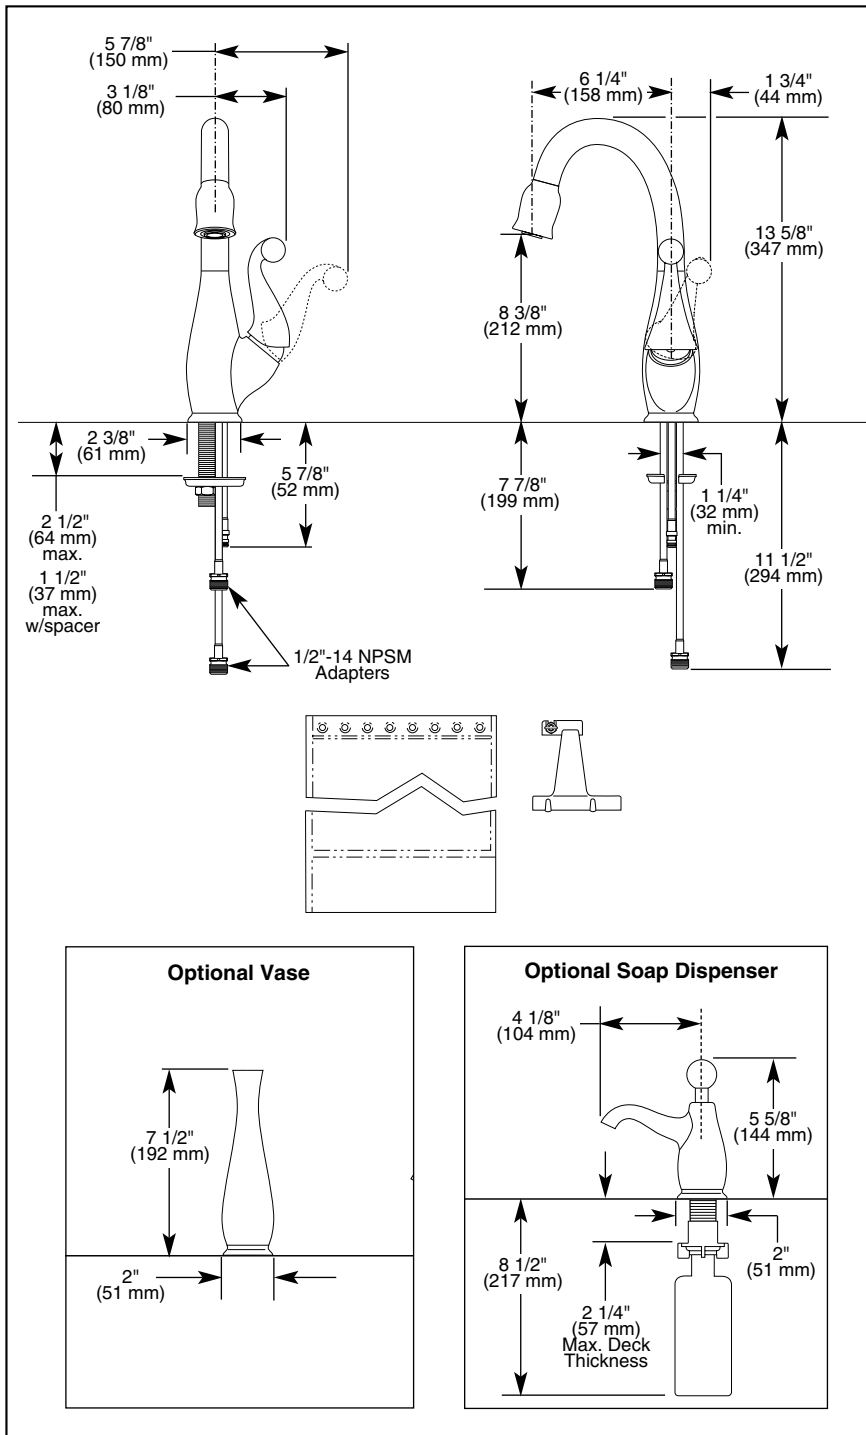

# BRIZO™

## BAR/PREP SINK FAUCETS

- Floriano™ Collection
- Single Handle Pull-Down
- Deck Mount
- Single or 2 Hole Sink Applications
- Optional Vase Interchangeable with Soap Dispenser




### COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- ICC/ANSI A117.1/ADA

### STANDARD SPECIFICATIONS:

- Single handle bar/prep sink faucets for exposed mounting on single hole sinks.
- Solid brass fabricated body.
- 13 5/8" (347 mm) high, 6 1/4" (158 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Quick connect hoses.
- Tangle-free bag for hose.
- Twist and lock mechanism eliminates spray head wobble.
- Red/Blue graphics on handle button to indicate hot/cold temperature.
- Dual integral check valves in sprayer assembly.
- Disposable hose lead to aide installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose guards integral to casting reduces wear and noise on hose.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring to help alignment and aid installation.

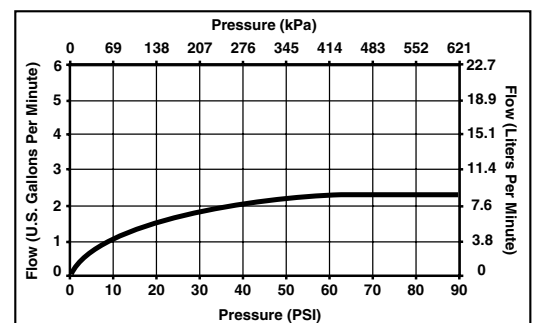

|                                                                                               |                                                                                   |
|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>Standard Features</b>                                                                      | <b>63510-*</b>                                                                    |
| Washerless                                                                                    | ◆                                                                                 |
| Single Hole Installation                                                                      | ◆                                                                                 |
| 2 1/2" (64 mm) Thick Deck Installation Capability                                             | ◆                                                                                 |
| Lever Handle                                                                                  |  |
| 13 5/8" (347 mm) High, 6 1/4" (158 mm) Long, Spout Swings 360°.                               | ◆                                                                                 |
| 3/8" O.D. Straight, Staggered Copper Supply Tubes – 7 7/8" (199 mm) and 11 1/2" (294 mm) Long | ◆                                                                                 |
| Standard with 1/2"-14 NPSM Adapters                                                           | ◆                                                                                 |
| Wand Matches Finish                                                                           | ◆                                                                                 |
| Red/Blue Graphics on handle button to indicate hot/cold temperature                           | ◆                                                                                 |

\*To specify finish add suffix

#### Available Finishes

| Suffix | Finish                        |
|--------|-------------------------------|
| PC     | Polished Chrome               |
| SS     | <i>Brilliance</i> ® Stainless |
| WH     | White                         |