


COMPLIES WITH:
ANSI/ASME A112.18.1
CSA B125
IAPMO Listed
CSA Certified
ICC/ANSI A117.1/ADA

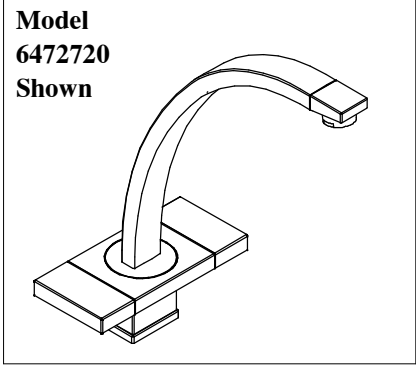

BAR & PREP SINK FAUCET
■ Loki™ Two Handle Bar & Prep Sink Faucet
■ 1 Hole Applications
■ Swivel Spout


Submitted Model No.: _____

STANDARD SPECIFICATIONS

- Two handle bar faucet for concealed mounting on 1 hole applications.
- Recommend 1 3/8” hole size.
- Spout swivels 120°.
- Control mechanism shall be of the rotating ceramic cylinder type.
- Handles slide on and off.

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
PC	Polished Chrome

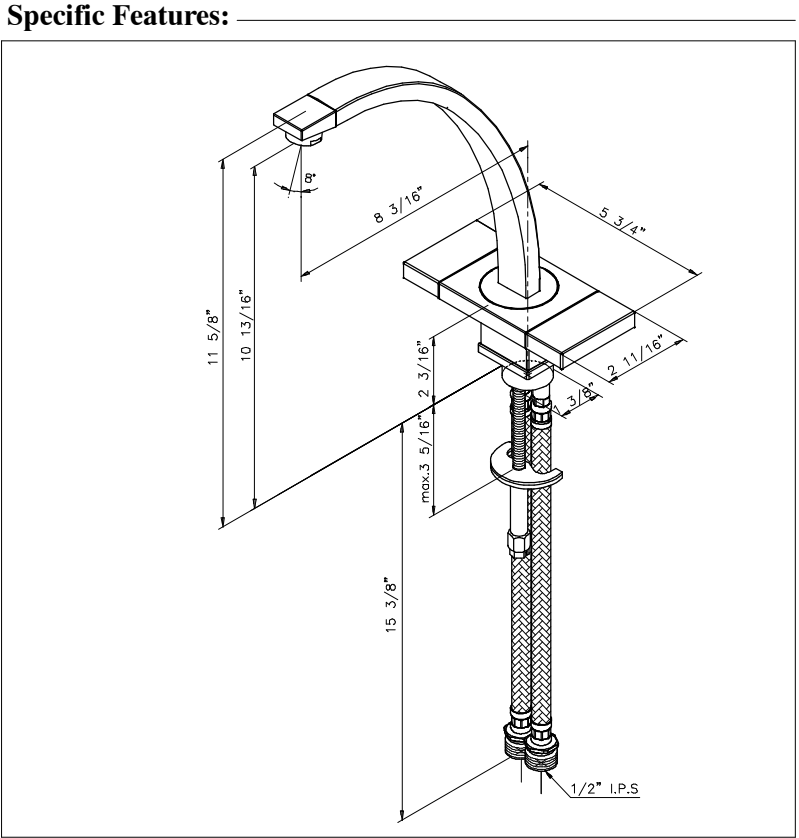

Metric Conversion Chart														
Gals./Min	0.5	1.0	1.5	2.0	2.5	3.0	10.0	10.5	12.0	17.5	18.0	19.0	psi	60.0 80.0
Ltrs./Min	1.9	3.8	5.7	7.6	9.5	11.4	38.0	40.0	45.0	66.0	68.0	72.0	kPa	414 551

Standard Features	6472720-*
Washerless ceramic valving	◆
Flexible connection hoses	◆
1/2” I.P.S. Adapters	◆
Swivel spout	◆

* To specify finish, add suffix.

