
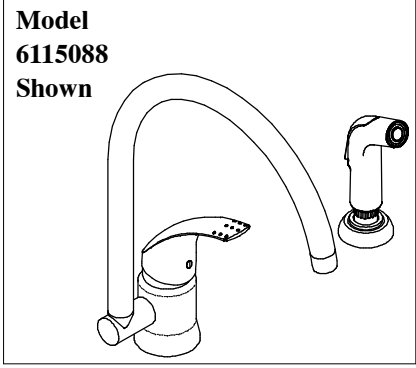


COMPLIES WITH:
ANSI/ASME A112.18.1
CSA B125
IAPMO Listed
CSA Certified
ICC/ANSI A117.1/ADA

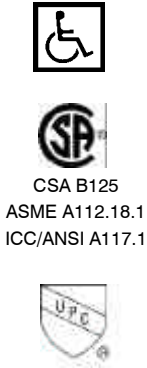


KITCHEN FAUCETS
■ Riviera® Single Handle
■ 2 Hole Applications
■ With Spray

Submitted Model No.: _____

Specific Features: _____

STANDARD SPECIFICATIONS

- Single handle kitchen faucets for concealed mounting on 2 hole applications.
- Control mechanism shall be of the rotating stainless steel ball type, with replaceable non-metallic seats.
- Spray attachment has anti-siphon device as integral part of valve body.
- Solid brass fabricated body.
- Recommend 1 1/4" hole size.
- Minimum 4" distance between holes.

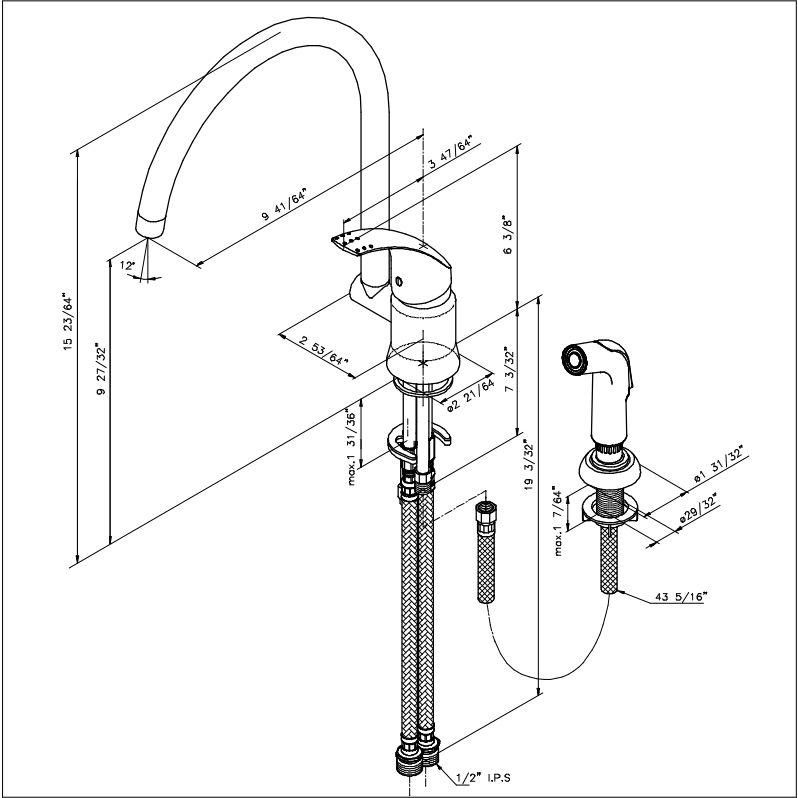

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance®Brushed Nickel
PC	Polished Chrome

Metric Conversion Chart													
Gals./Min	0.5	1.0	1.5	2.0	2.5	3.0	10.0	10.5	12.0	17.5	18.0	19.0	psi 60.0 80.0
Ltrs./Min	1.9	3.8	5.7	7.6	9.5	11.4	38.0	40.0	45.0	66.0	68.0	72.0	kPa 414 551

Standard Features	
Washerless	◆
Flexible connection hoses	◆
With spray	◆
1/2" I.P.S. Adapters	◆
Sprayer finish matches fauset finish	◆

