


COMPLIES WITH:
 ANSI/ASME A112.18.1
 CSA B125
 IAPMO Listed
 CSA Certified
 ICC/ANSI A117.1/ADA



Model
6715815
Shown

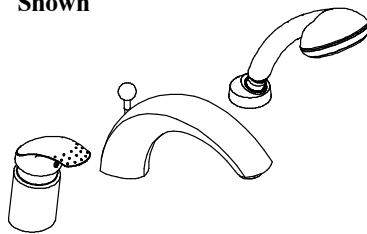

BATH VALVES

- Riviera™ Single Handle Roman Tub Valve
- 3 Hole Applications
- Temperature and Volume Controlled With Single Handle
- Automatic Diverter Spout
- Hand Held Retractable Shower
- 4 1/2" to 10" Centers
- Flexible Ledge Mount

Submitted Model No.: _____

STANDARD SPECIFICATIONS



- Single handle Roman tub valve with hand held shower for concealed mounting on 3 hole applications.
- Control mechanism shall be of rotating ceramic cartridge type.
- Minimum 4 1/2" distance between holes.
- Recommended hole size: Valve unit: 1 1/2"
Spout: 1 1/8"
Shower nest: 1 3/8"
- All operating parts shall be replaceable from the top.
- Conventional installation kit adjusts to 3" maximum deck thickness.
- Spout with integral diverter, vacuum breaker not required.
- Hand held shower flows 2.5 gpm @ 80 psi.

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
PC	Polished Chrome

Standard Features	
Washerless ceramic valving cartridge	◆
With hand shower	◆
Automatic diverter spout	◆
Flexible connection hoses	◆
1/2" I.P.S. Adapters	◆
Shower finish matches faucet finish	◆

Specific Features:

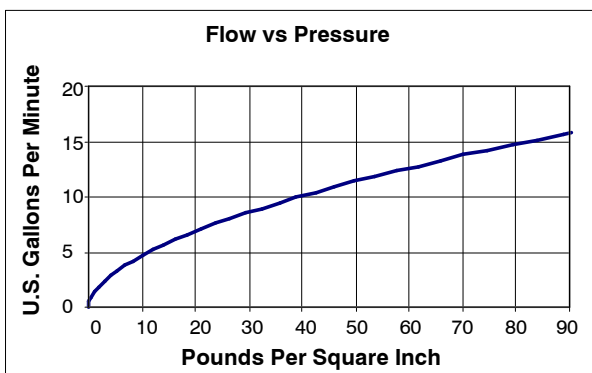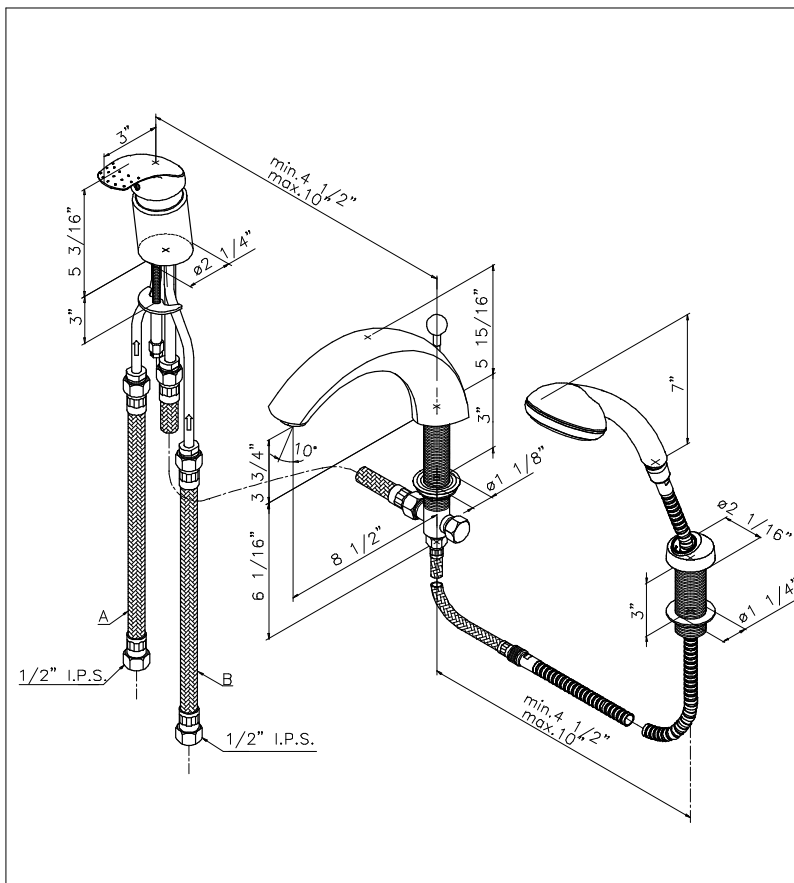

Metric Conversion Chart													
Gals./Min	0.5	1.0	1.5	2.0	2.5	3.0	10.0	10.5	12.0	17.5	18.0	19.0	psi
Ltrs./Min	1.9	3.8	5.7	7.6	9.5	11.4	38.0	40.0	45.0	66.0	68.0	72.0	kPa