
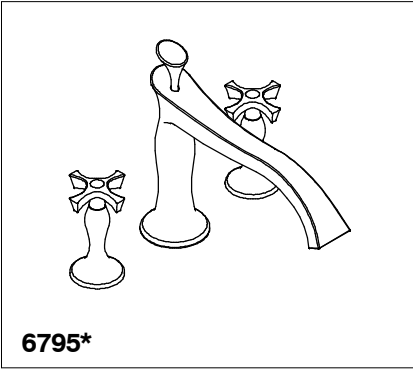


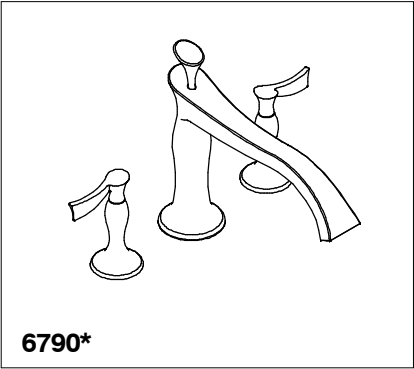

BRIZO™

BATH VALVES



- RSVP™ Two Handle Roman Tub Valve
- 3 Hole Applications
- Temperature and Volume Controlled With Handles
- 6" to 16" Centers
- Flexible Ledge Mount

Submitted Model No.: _____
 Specific Features: _____



COMPLIES WITH:
 ANSI/ASME A112.18.1
 CSA B125
 IAPMO Listed
 CSA Certified
 ICC/ANSI A117.1/ADA

- STANDARD SPECIFICATIONS:**
- Roman tub valve.
 - Valve mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
 - Minimum 4 1/2" to maximum 10" distance between holes.
 - Recommended hole size: Valve units: 1 3/8"
 Spout: 1 1/8"
 - All operating parts shall be replaceable from the top.
 - Conventional installation kit adjusts to 3" maximum deck thickness.

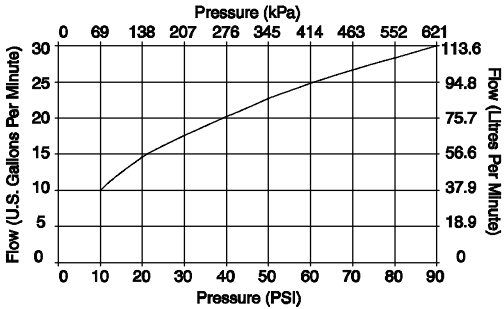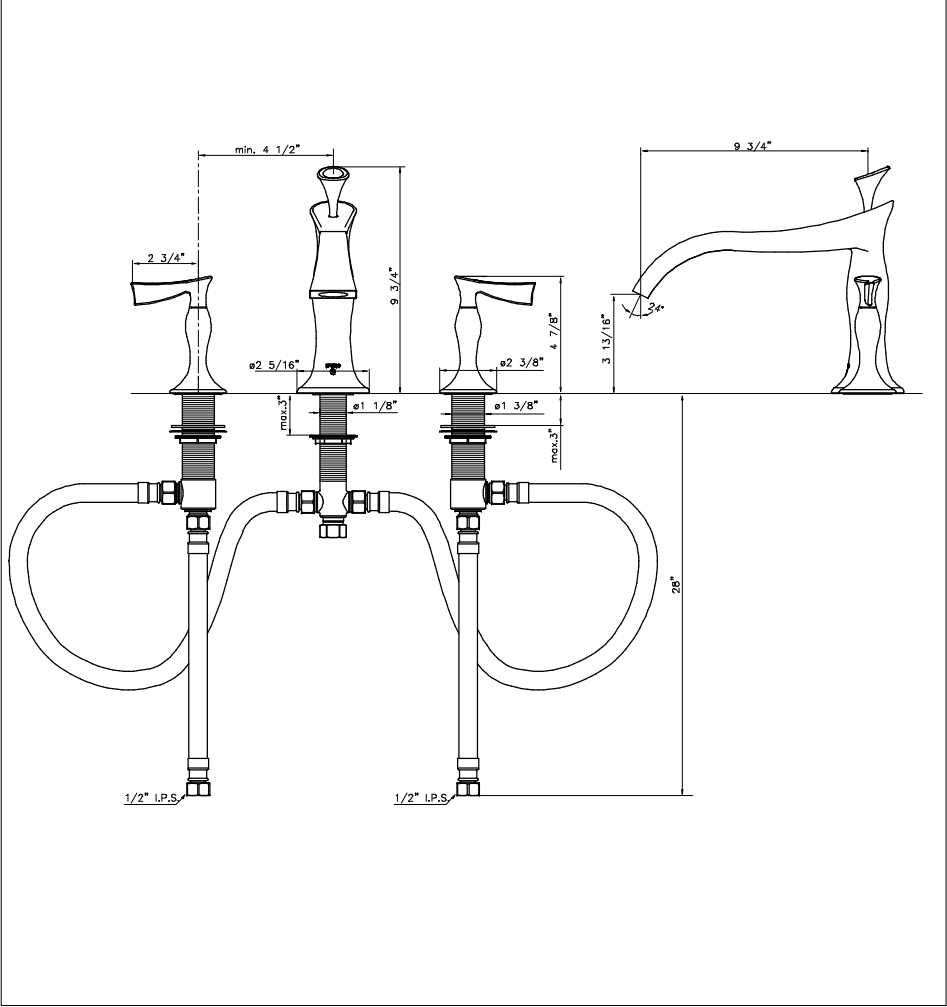

Standard Features	6790*/6795*
Washerless ceramic valving	◆
Flexible connection hoses	◆
1/2" I.P.S. Adapters	◆

*To specify finish add suffix

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
BZ	Brilliance® Brushed Bronze
PC	Polished Chrome

Delta Faucet Company
 Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 ©2004 Masco Corporation of Indiana