

## DESCRIPTION

Monaco 3000 series is a small scale, versatile, LED, HID or incandescent inground illuminator for use with T4.5, T6, T3.5; PAR20 and PAR30 metal halide lamps or LED. The adjustable versions, 3000A, 3001A and 3002A provide up to 25° tilt and 360° rotation of the lamp beam allowing for precision aiming. The non-adjustable versions, 3000N, 3001N and 3002N provide a fixed uplight. The optional cool lens - dual lens helps reduce the temperature of the outer lens making it more walk-over friendly and allows this fixture to be used in pedestrian areas.

Catalog #	Type
Project	
Comments	Date
Prepared by	

## SPECIFICATION FEATURES

### Material

Recessed housing is constructed from corrosion-proof, injection molded polyphenylene sulfide (PPS). Trim ring is constructed from corrosion-resistant brass or stainless steel.

### Finish: Painted Brass, Natural Brass or Stainless Steel

Painted trim rings are constructed from solid brass with a polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment. A variety of standard colors available. Machined natural brass or stainless steel trim rings are unpainted to reveal the natural beauty of the material and are available in either round or square forms (for square, specify option -SQ). Brass will patina naturally over time.

### Lens

Domed 1/2" thick tempered glass lens, factory sealed with high temperature gasket to prevent water intrusion. Suitable for drive-over applications to 5000 lbs. An internal temperature reduction lens is available to reduce outer lens temperatures even further (specify option -TRL).

### Hardware

Stainless steel hardware is standard to provide maximum corrosion-resistance. Outer trim ring includes captive fasteners.

### Socket

T4.5: Ceramic socket with 250° C Teflon® coated lead wires and G12 bi-pin base. T6: Ceramic socket with 250° C Teflon® coated lead wires and G12 bi-pin base. T3.5: Ceramic socket with 250° C Teflon® coated lead wires and PGj5 twist and lock base. PAR20: Ceramic socket with 250°C Teflon® coated lead wires and medium base.

### Electrical

Incandescent fixtures 120V only.

### Labels & Approvals

UL and cUL listed, standard wet label. IP68 rated. Manufactured to ISO 9001-2000 Quality Systems Standard.

### Warranty

Lumiere warrants it's fixtures against defects in materials & workmanship for three (3) years. Auxiliary equipment such as transformers, ballasts and lamps carry the original manufacturer's warranty.

### Recessed Housing

Recessed housing is available to ship in advance of complete fixture for rough-in purposes. Specify option -LBB and order recessed housing and accompanying components from below:

3000-BBR  
3000-BBS  
Recessed housing.

3000-BBR-FUS  
3000-BBS-FUS  
Recessed housing with fusing option.





## MONACO 3001N

**Incandescent -  
Nonadjustable  
Inground**

**50W (max.) PAR20**

**75W (max.) PAR30**

**IP68**

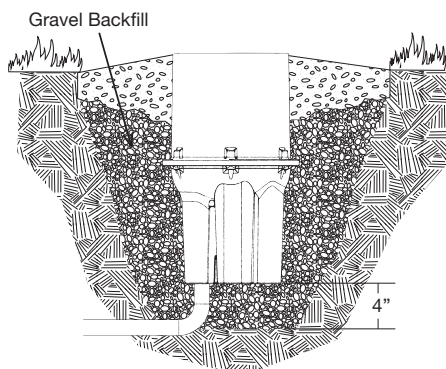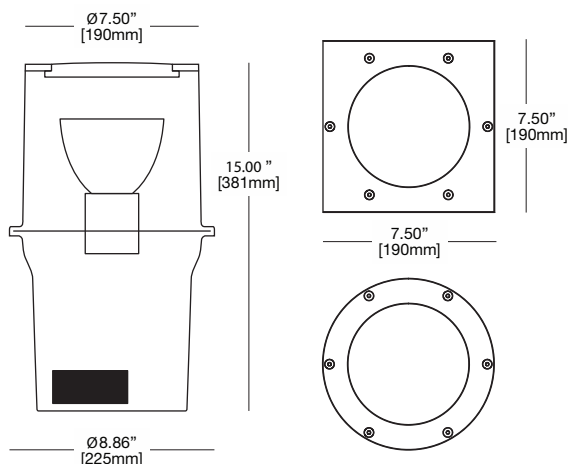


### Warning

To prevent water, dirt and debris from collecting, install fixture to allow runoff. Do not install fixture in areas where water can collect for long periods of time. Appropriate drainage must be provided. See installation instructions and review all warnings before installing fixture.

## ORDERING INFORMATION

Sample Number: 3001N-RD-PAR20-CLR-120-BZ

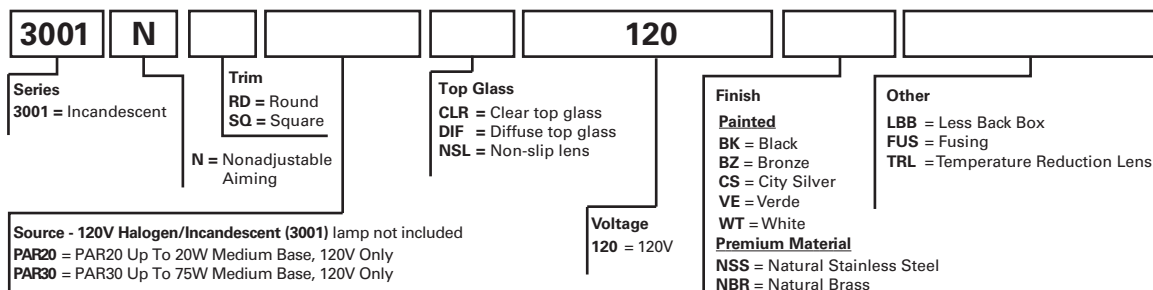

## ACCESSORIES

Filters

**F71-38** = Peach Dichroic Filter, 4.95" Diameter  
**F72-38** = Amber Dichroic Filter, 4.95" Diameter  
**F73-38** = Green Dichroic Filter, 4.95" Diameter  
**F74-38** = Medium Blue Dichroic Filter, 4.95" Diam.  
**F75-38** = Yellow Dichroic Filter, 4.95" Diameter  
**F76-38** = Red Dichroic Filter, 4.95" Diameter  
**F77-38** = Dark Blue Dichroic Filter, 4.95" Diameter  
**F78-38** = Light Blue Dichroic Filter, 4.95" Diameter  
**F79-38** = Neutral Density Dichroic Filter, 4.95" Diam.  
**F80-38** = Magenta Dichroic Filter, 4.95" Diameter  
**F22-38** = Red Color Filter, 4.95" Diameter  
**F33-38** = Blue Color Filter, 4.95" Diameter  
**F44-38** = Green Color Filter, 4.95" Diameter  
**F55-38** = Yellow Color Filter, 4.95" Diameter  
**F66-38** = Mercury Vapor Color Filter, 4.95" Diam.

Temperature Reducing Lens

**TRL3** for T3, T4, T6 PAR20 lamp only  
**TRL-38** for PAR30L

Optical Lenses

**LSL-38** = Linear Spread Lens (elongate standard beam spread), 4.95" Diameter  
**DIF-38** = Diffused Lens (provide even illumination), 4.95" Diameter  
**OSL-38** = Overall Spread Lens (increase beam spread), 4.95" Diameter

Optical Louver

**LVR-38** = 45° Hex Cell Louver (reduce glare), 4.95" Diameter

Debris/Concrete Pour Covers

**3000-CPR** = Round Debris Cover  
**3000-CPS** = Square Debris Cover

Light Control

**3000-RG** = Rock Guard  
**3000-SG** = Straight Glare Shield

Top Glass

**3000-CLR** = Clear Top Glass  
**3000-DIF** = Diffused Top Glass  
**3000-NSL** = Non Slip Lens

Electrical

**3000-FUS** = Fusing Package

Line Voltage Halogen

**HP2035-NSP** = 35W PAR20 Halogen Narrow Spot, Medium Base  
**HP2035-NFL** = 35W PAR20 Halogen Narrow Flood, Medium Base  
**HP2050-NSP** = 50W PAR20 Halogen Narrow Spot, Medium Base  
**HP2050-SP** = 50W PAR20 Halogen Spot, Medium Base  
**HP2050-NF** = 50W PAR20 Halogen Narrow Flood, Medium Base  
  
**HP3050-NSP** = 50W PAR30 Halogen Narrow Spot, Medium Base  
**HP3050-SP** = 50W PAR30 Halogen Spot, Medium Base  
**HP3050-NFL** = 50W PAR30 Halogen Narrow Flood, Medium Base  
**HP3075-NSP** = 75W PAR30 Halogen Narrow Spot, Medium Base  
**HP3075-SP** = 75W PAR30 Halogen Spot, Medium Base  
**HP3075-NFL** = 75W PAR30 Halogen Narrow Flood, Medium Base  
**HP3075-FL** = 75W PAR30 Halogen Flood, Medium Base

## INSTALLATION

Caution: To prevent water, dirt and debris from collecting, install fixture to allow runoff. Do not install fixture in areas where water can collect for long periods of time. Appropriate drainage must be provided.

Excavated hole must be approximately 15" in diameter by 20" in depth. Fixture must be installed with a minimum 4" depth of pea gravel or equivalent drainage base. Backfill an additional 8" depth of pea gravel on lower portion of fixture for soil stability. For more detailed installation instructions and warnings consult factory.