



6592*

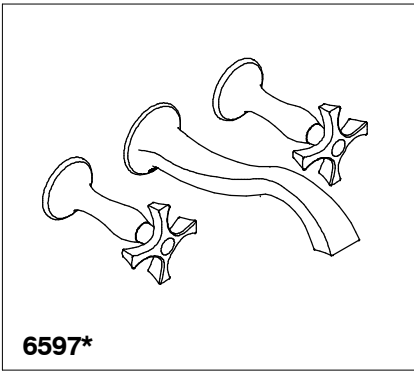

6597*

Submitted Model No.: _____
 Specific Features: _____

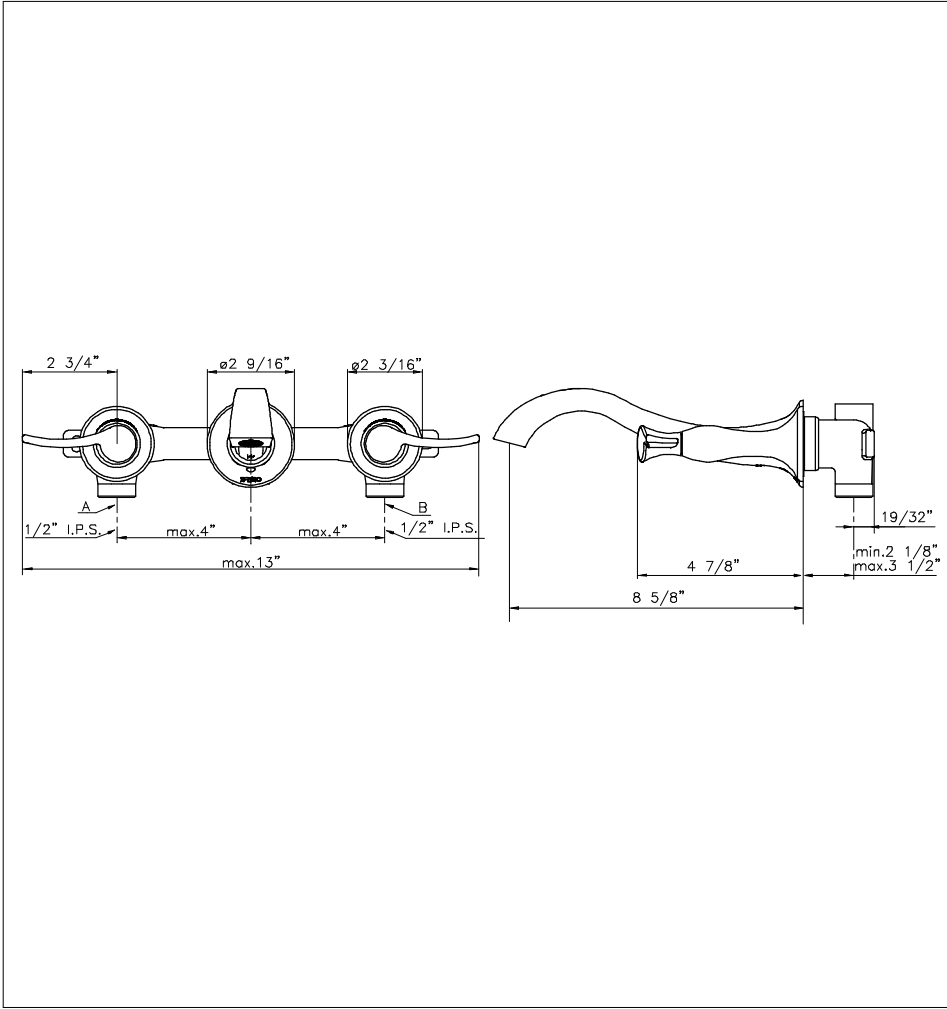

BRIZO™

LAVATORY FAUCETS


- RSVP™ Two Handle Wall Mounted Lavator Valve
- 3 Hole Applications
- 8" Centers
- Temperature and Volume Controlled With Handles.
- 8 5/8" Solid Metal Spout



COMPLIES WITH:
 ANSI/ASME A112.18.1
 CSA B125
 IAPMO Listed
 CSA Certified
 ICC/ANSI A117.1/ADA

STANDARD SPECIFICATIONS:

- Two handle lavatory faucet for concealed mounting on 3 hole applications.
- 8 5/8" Solid metal spout.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- 8" Center, 4" distance between holes.
- 1 1/2" Recommended hole size.
- Roughing in dimensions: 2 1/8" to 3 1/2".
- 1/2" I.P.S. Inlets.
- For push button drain option, order: RP6949570* with overflow holes or RP6949572* less overflow holes. * indicates surface suffix.

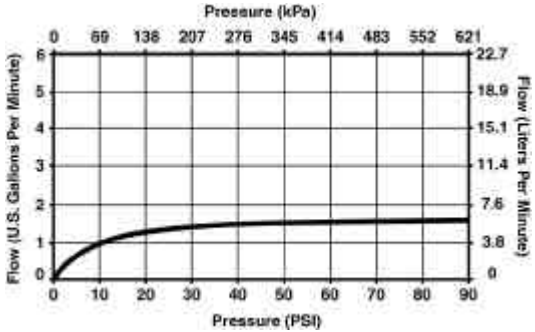

Standard Features	6592*/6597*
Washerless ceramic valving	◆
8 5/8" metal spout	◆
1/2" I.P.S. Connections	◆

*To specify finish add suffix

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
BZ	Brilliance® Brushed Bronze
PC	Polished Chrome

Delta Faucet Company
 Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 ©2004 Masco Corporation of Indiana