

DESCRIPTION

The Zuma 1203 is a rugged and attractive ADA-compliant step light for use with a low voltage, 13W incandescent lamp (provided). It mounts directly to any non-combustible surface, yet projects only 1-3/4" from the mounting surface. The adjustable 'eyelid' style faceplate rotates 360° and shields the lamp source to provide soft, comfortable illumination.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A ... Material

Mounting base is machined from corrosion-resistant 6060-T6 aluminum billet. Faceplate/housing is cast from corrosion-resistant silicone aluminum.

B ... Finish

Fixtures are double protected by a chromate conversion undercoating and polyester powdercoat paint finish, surpassing the rigorous demands of the outdoor environment. A variety of standard colors are available.

C ... Gasket

Housing and faceplate are sealed with a high temperature silicone o-ring gasket to prevent water intrusion.

D ... Lens

Diffused tempered glass lens, factory sealed with high temperature adhesive to prevent water intrusion and breakage due to thermal shock.

E ... Hardware

Stainless steel hardware is standard to provide maximum corrosion-resistance.

F ... Socket

Ceramic socket with 250° C Teflon® coated lead wires and wedge base.

G ... Electrical

Remote 12V transformer required (not included). Available from Lumière as an accessory - see the Accessories & Technical Data section of this catalog for details.

H ... Lamp

Included as standard.

I ... Labels & Approvals

UL and cUL listed, standard wet label. Manufactured to ISO 9001-2000 Quality Systems Standard. IBEW union made.

J ... Warranty

Lumière warrants its fixtures against defects in materials & workmanship for three (3) years. Auxiliary equipment such as transformers, ballasts and lamps carry the original manufacturer's warranty.



ZUMA


1203

13W (max.) T5

Incandescent
Low Voltage

Step Light

ADA-COMPLIANT

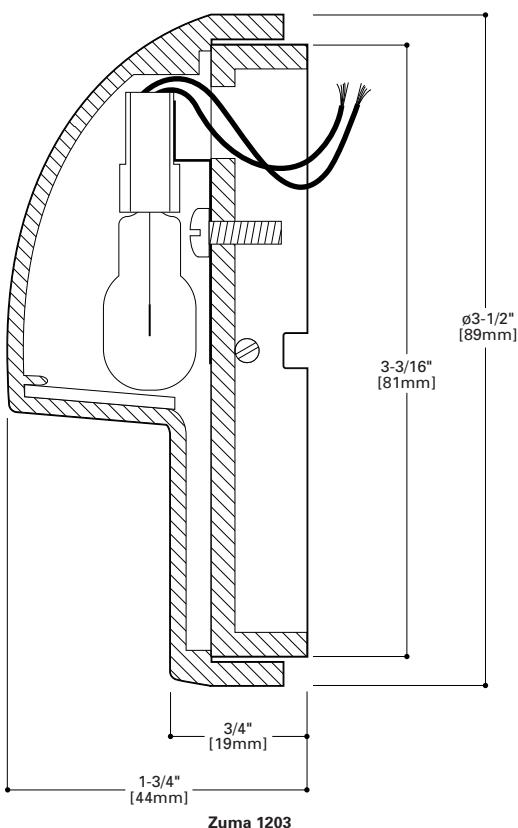


Zuma 1203

Test No. H45021

Lamp=13T5

Lumens=12

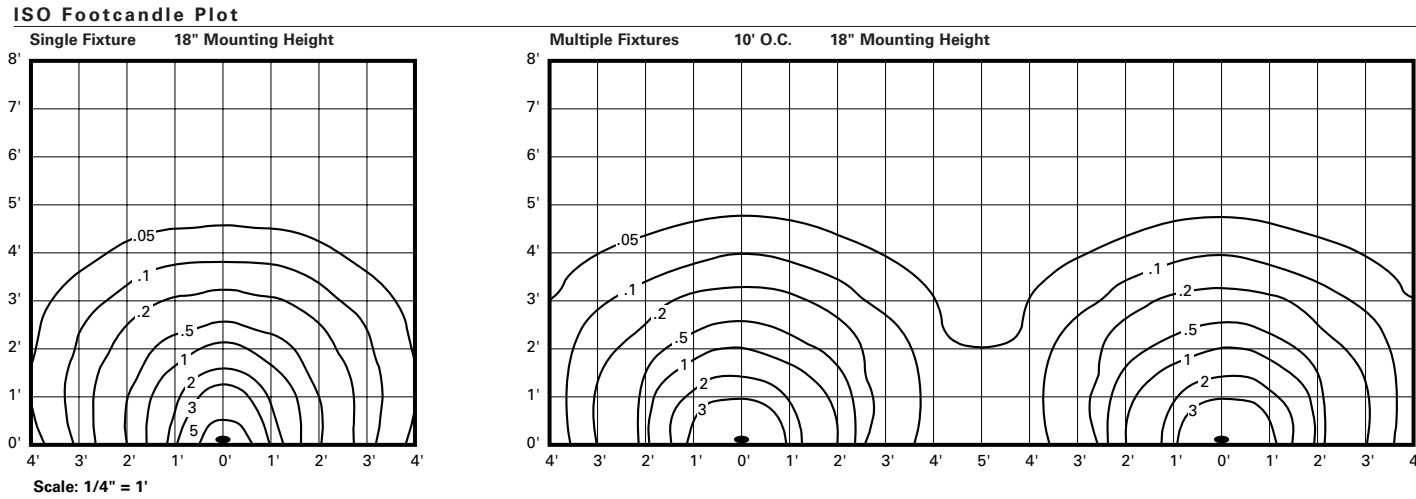

LAMP INFORMATION

Lamp	ANSI Code	Watts	Beam Spread	CBCP	°K	Life (hrs.)	Base	Volts
912	---	12.8	---	---	---	1000	wedge	12.8*

*Operating lamp at 12 volts or less results in approximately 3x increase in lamp life.

NOTE: Inferior quality lamps may adversely affect the performance of this product. Use only name brand lamps from reputable lamp manufacturers.

NOTES AND FORMULAS

- Beam diameter is to 50% of maximum footcandles, rounded to the nearest half-foot.
- Footcandle values are initial. Apply appropriate light loss factors where necessary.

ORDERING INFORMATION

Series

1203=Eyelid, Surface Mount
Zuma Step Light

Source

Incandescent
INC13=13W Max T5 Incandescent,
Wedge Base

Voltage

12=12V

Finish

Painted
BK=Black
BZ=Bronze
CS=City Silver
VE=Verde
WT=White

Notes: • Lamp included.

• 12V remote transformer required - not included.

• See ACCESSORIES & TECHNICAL DATA section of the Lumière catalog for Low Voltage Cable & Transformers.

• Consult your Cooper Lighting representative for additional options and finishes.