

6590\*



6595\*

# BRIZO™

## LAVATORY FAUCETS

- RSVP™ Two Handle
- 3 Hole Applications
- 6" to 16" Centers

Submitted Model No.: \_\_\_\_\_



Specific Features: \_\_\_\_\_



**COMPLIES WITH:**  
 ANSI/ASME A112.18.1  
 CSA B125  
 IAPMO Listed  
 CSA Certified  
 ICC/ANSI A117.1/ADA

### STANDARD SPECIFICATIONS:

- Two handle lavatory faucet for concealed mounting on 3 hole applications.
- Widespread 6" to 16" centers.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- Metal drain has pop-up type fitting with plated flange and stopper.

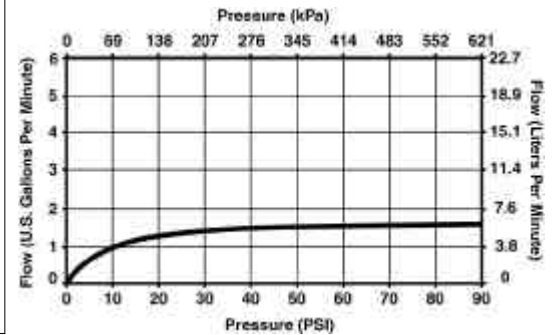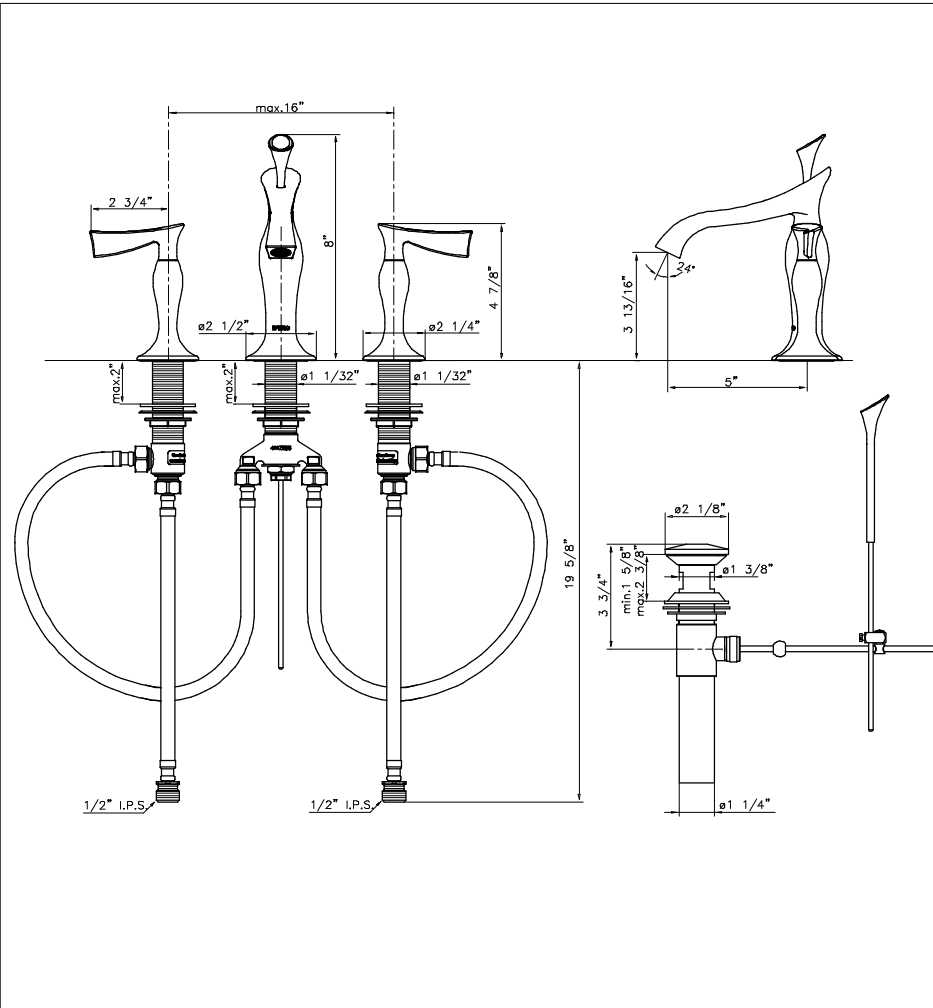

| Standard Features          | 6590*/6595* |
|----------------------------|-------------|
| Washerless ceramic valving | ◆           |
| Flexible connection hoses  | ◆           |
| Metal Pop-up Drain         | ◆           |
| 1/2" I.P.S. Adapters       | ◆           |

\*To specify finish add suffix

### AVAILABLE FINISHES

| Suffix | Finish                     |
|--------|----------------------------|
| BN     | Brilliance® Brushed Nickel |
| BZ     | Brilliance® Brushed Bronze |
| PC     | Polished Chrome            |

**Delta Faucet Company**  
 Indianapolis, Indiana 46280  
 A Division of Masco Corporation of Indiana  
 ©2004 Masco Corporation of Indiana

20012.00

02.07