














BEAM2 BEAM3 BEAM3 BEAM4 BEAM6 BALLAST REPLACEMENT INSTRUCTIONS

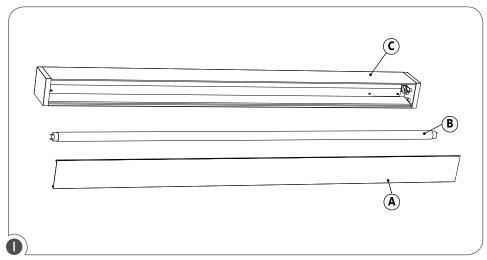

NOTE: Before attempting to verify and replace the ballast, ensure that the power to the fixture's circuit is turned off. Remove optics (A) and lamps (B) from the fixture (C).

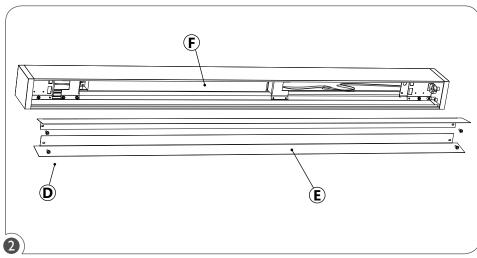


Remove reflectors retaining screws (D) and remove reflectors (E) to reveal the ballast (F).

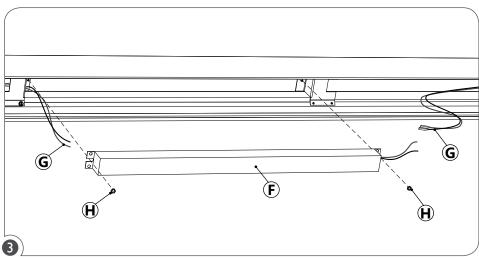

Disconnect wires from the ballast (F) using the quick-wire connectors (G). Remove the ballast (F) retaining nuts (H).

Replace ballast (F) and reconnect wires using the quick-wire connectors (G).

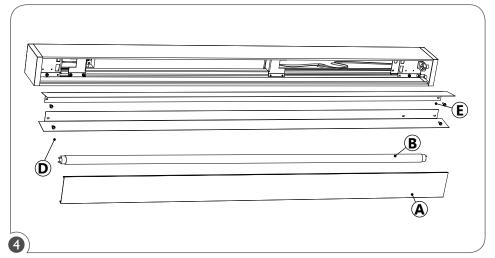

Put the reflectors (E) back in place and fasten retaining screws (D). Re-install the lamps (B) and optics (A).

FILE NAME:BEAM.BLST.INST

LIGHTING

October 25, 2011

www.axislighting.com

1.800.263.AXIS [T] 514.948.6272 [F] 514.948.6271



RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.



Page: I / I