


COMPLIES WITH:
ANSI/ASME A112.18.1
CSA B125.1
ICC/ANSI A117.1/ADA

IAPMO Listed
CSA Certified



Model
6516017
Shown



LAVATORY FAUCETS


- Trevi™ Cross Two Handle
- 3 Hole Applications
- 6" to 16" Centers

Submitted Model No.: _____

Specific Features: _____

STANDARD SPECIFICATIONS

- Two handle lavatory faucet for concealed mounting on 3 hole applications.
- Widespread 6" to 16" centers.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- Metal drain has pop-up type fitting with plated flange and stopper.
- The back edge of the faucet body must be at least 1 1/2 inches from the backsplash on wall in order to allow the lift rod to function properly.

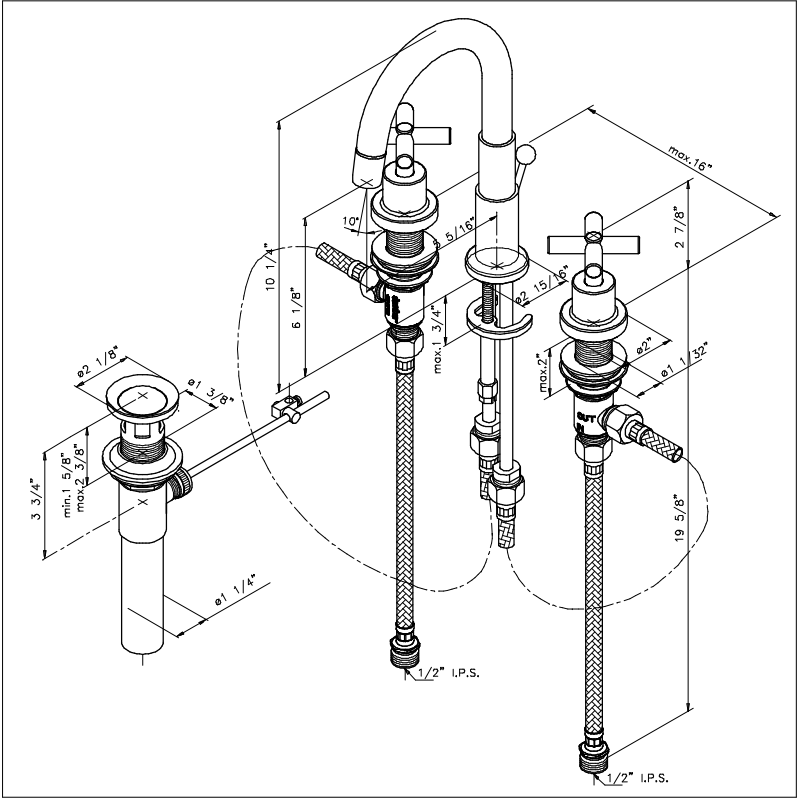

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
PC	Polished Chrome

Standard Features	
Washerless ceramic valving	◆
Flexible connection hoses	◆
Metal Pop-up Drain	◆
1/2" I.P.S. Adapters	◆

Metric Conversion Chart													
US Gals./Min	0.5	1.0	1.5	2.0	2.5	3.0	10.0	10.5	12.0	17.5	18.0	19.0	psi 60.0 80.0
L/Min	1.9	3.8	5.7	7.6	9.5	11.4	38.0	40.0	45.0	66.0	68.0	72.0	kPa 414 551

