



# RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS FOR SLIP-THROUGH BRACKET (DB)

**WARNING:** Before cutting into drywall, locate all power conduits and cables.

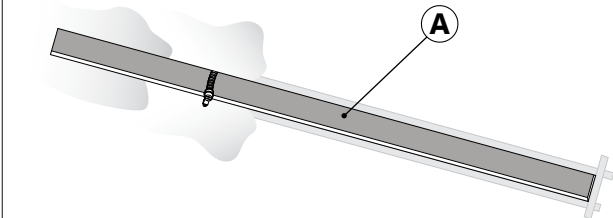


1

Ensure that the power to the fixture's circuit is turned off. Cut hole (A) in drywall according to the dimensions on the shop drawings. Tape and finish around the edges.

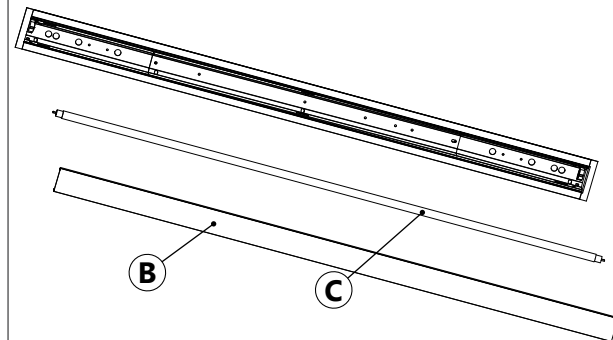


2

Remove optics (B) to gain access to lamps. Remove lamps (C) if installed.

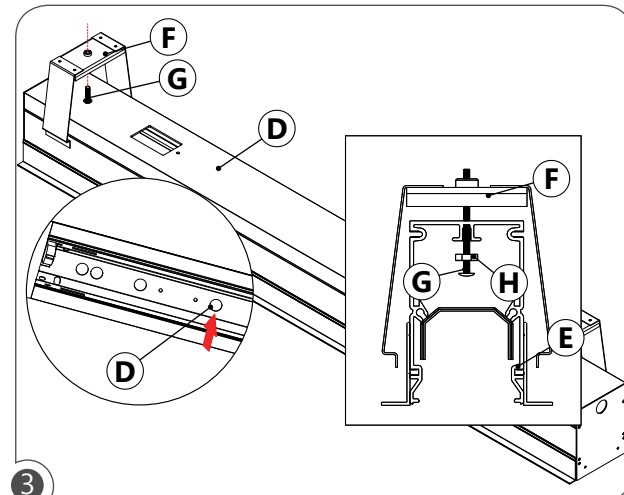


3

Place the slip through bracket (F) on both sides of the fixture (E). Insert the 1/4-20 screw (G) and nut (H) through the reflector tab (D) and screw to the slip through bracket (F), **do not tighten** the screw (G) until the fixture (E) is installed into the cut hole.

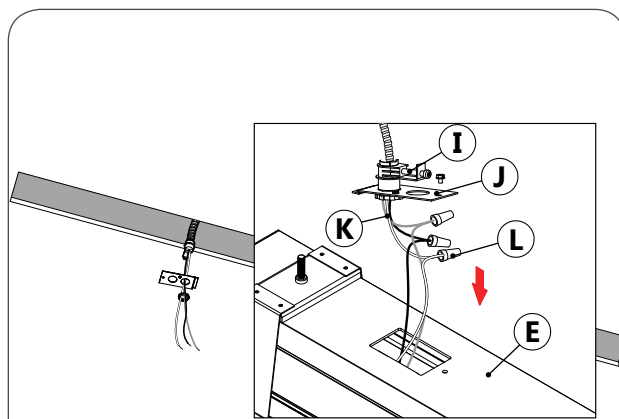


4

Install BX cable connector (I) through the power plate (J). Wire BX cable wires (K) to fixture (E) using the wire nuts (L). Push connected wires into fixture (E). Fasten the power plate (J) to fixture (E).

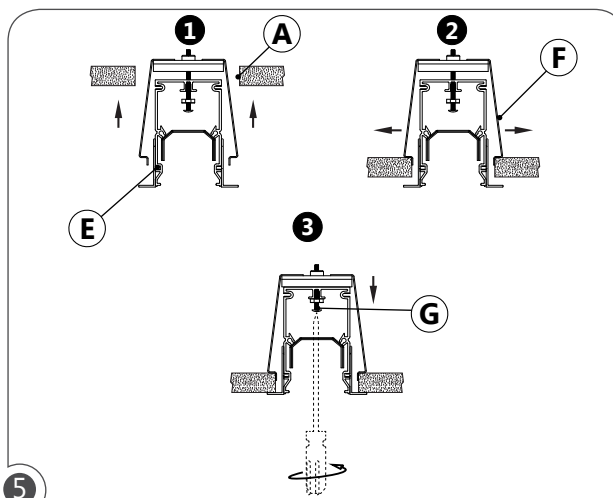

5

(1) Push fixture (E) through hole in drywall (A).  
(2) Bracket arms (F) will snap out.  
(3) Tighten the screw (G) until fixture is tight to ceiling.

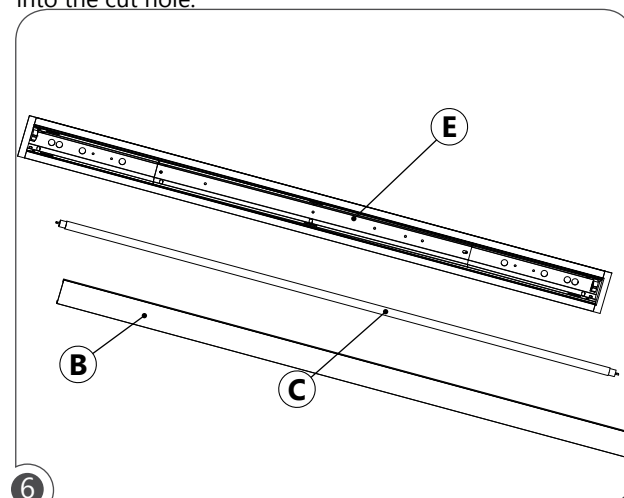

6


Re-install the lamps (C) and optics (B) in the fixtures (E). Power can now be turned on.




**WARNING:** RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.




# RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS FOR SLIP-THROUGH BRACKET (DB)

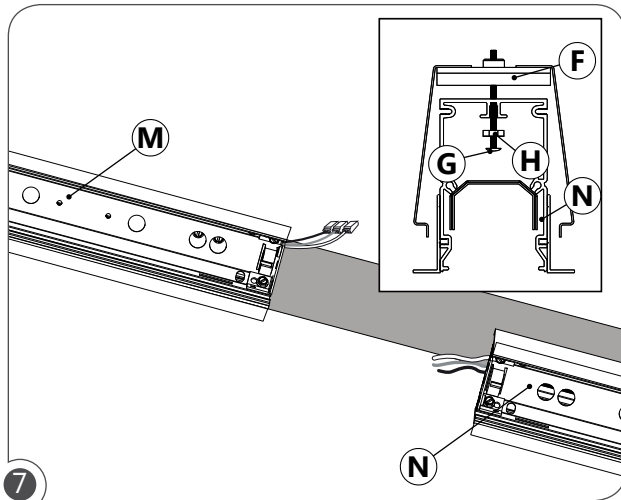


**7** **CONTINUOUS ROW:** Follow steps 1 to 5 for the first section (M) of the fixture and follow steps 2 and 3 for the second section (N).

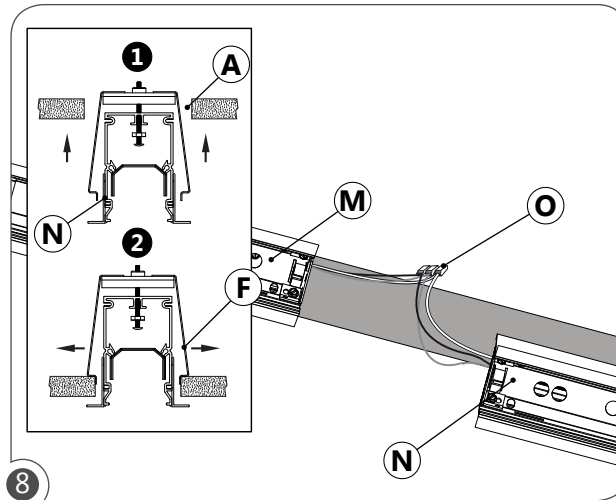


**8** Make wire connections with quick-wire connectors (O) between the joining sections (M) and (N).  
(1) Push fixture (N) through hole in drywall (A).  
(2) Bracket arms (F) will snap out.

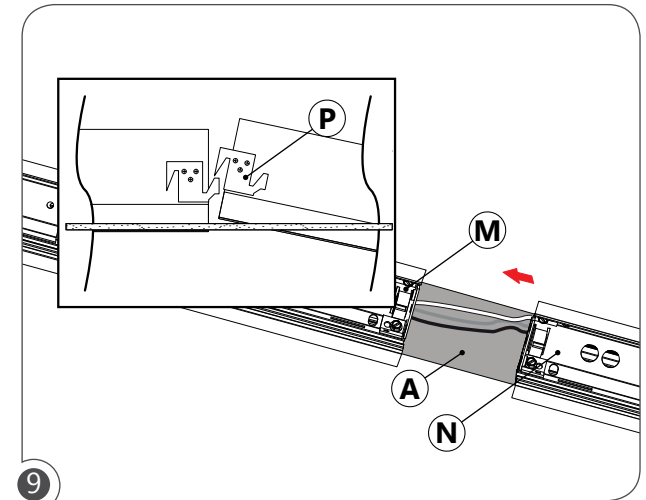

**9** Insert the second sections (N) into the drywall hole (A). Slide the sections together and hook the joining hooks (P) to each other to join sections.

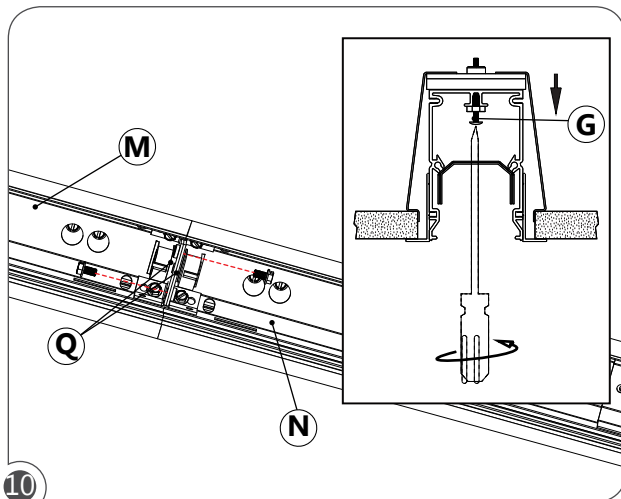

**10** Secure joining brackets (Q) to each other using the provided screws. Tighten the screw (G) until fixture is tight to ceiling.

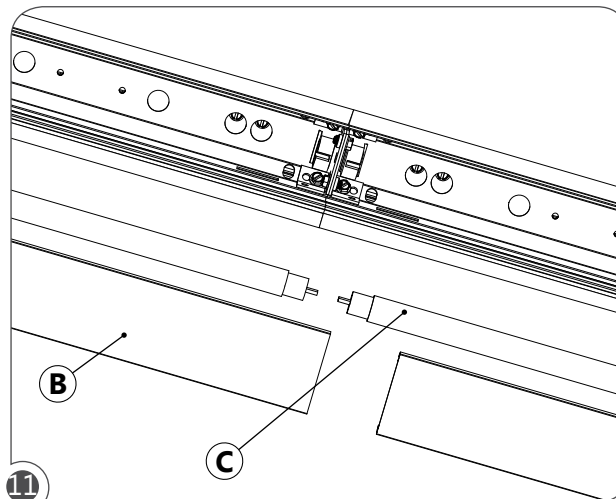

**11** **Follow steps 7 to 10 for the next sections.**  
Re-install the lamps (C) and optics (B) at the end of the installation process.