
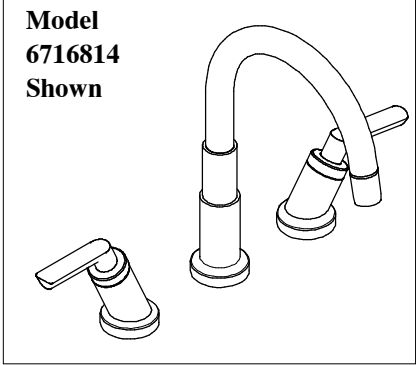


COMPLIES WITH:
 ANSI/ASME A112.18.1
 CSA B125
 IAPMO Listed
 CSA Certified
 ICC/ANSI A117.1/ADA

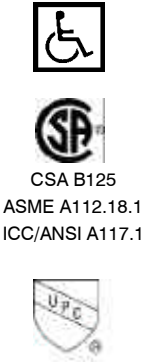

BATH VALVES

- Trevi™ Two Handle Roman Tub Valve
- 3 Hole Applications
- Temperature and Volume Controlled With Handles
- 8” to 16” Centers
- Flexible Ledge Mount

Submitted Model No.: _____



STANDARD SPECIFICATIONS

- Roman tub valve
- Valve mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- All operating parts shall be replaceable from the top.
- Conventional installation kit adjusts to 1 49/64” maximum deck thickness.

AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
PC	Polished Chrome

Standard Features	
Washerless ceramic valving	◆
Flexible connection hoses	◆
1/2” I.P.S. Adapters	◆

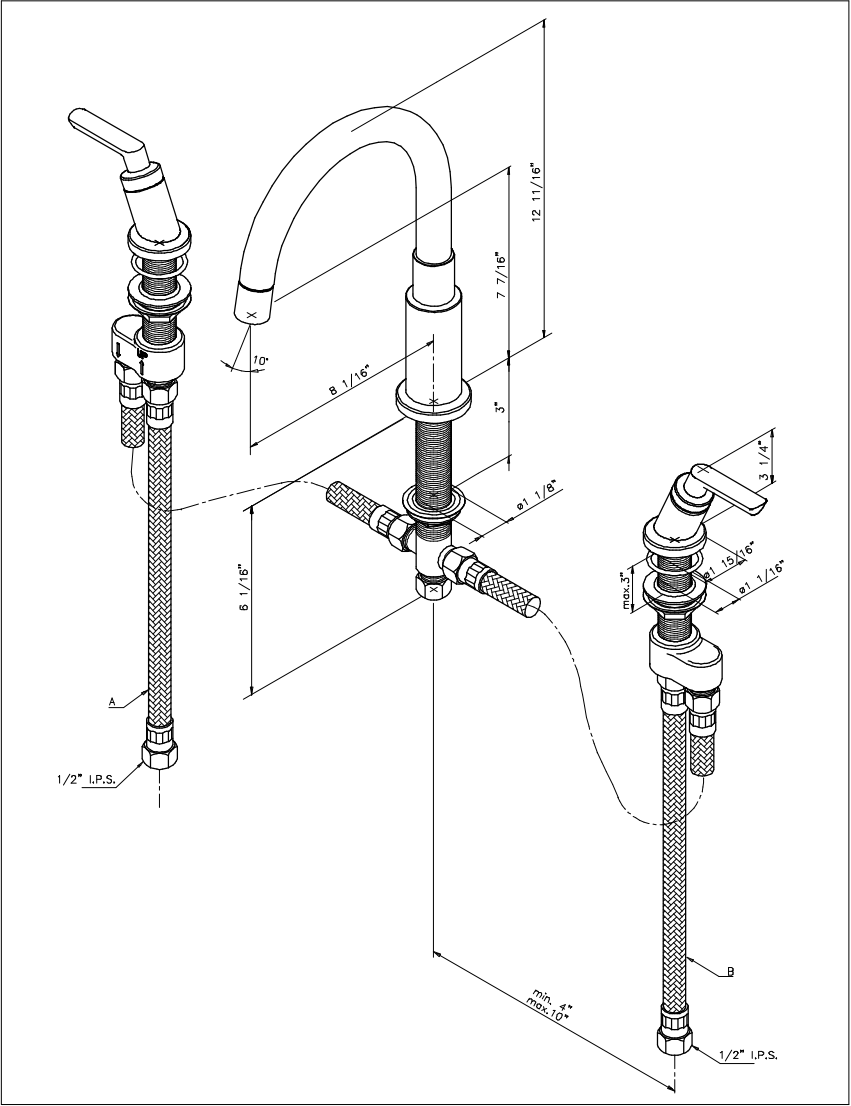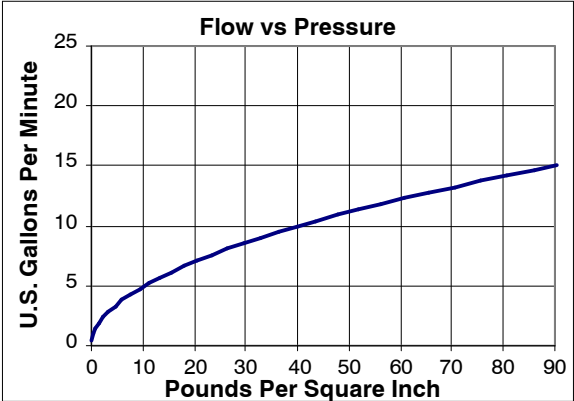

Metric Conversion Chart															
Gals./Min	0.5	1.0	1.5	2.0	2.5	3.0	10.0	10.5	12.0	17.5	18.0	19.0	psi	60.0	80.0
Ltrs./Min	1.9	3.8	5.7	7.6	9.5	11.4	38.0	40.0	45.0	66.0	68.0	72.0	kPa	414	551