



# RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS FOR FLANGELESS (D) AND VISIBLE FLANGE (DF)

**WARNING:** Before cutting into drywall, locate all power conduits and cables.

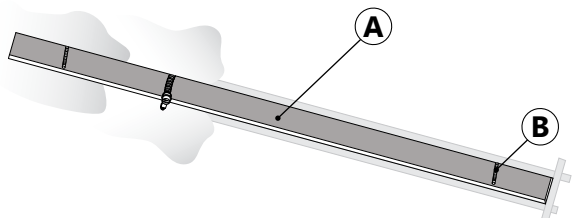


1

Ensure that the power to the fixture's circuit is turned off. Cut hole (A) in drywall and place 1/4-20 threaded rods (B) according to the dimensions on the shop drawings. Tape and finish around the edges.

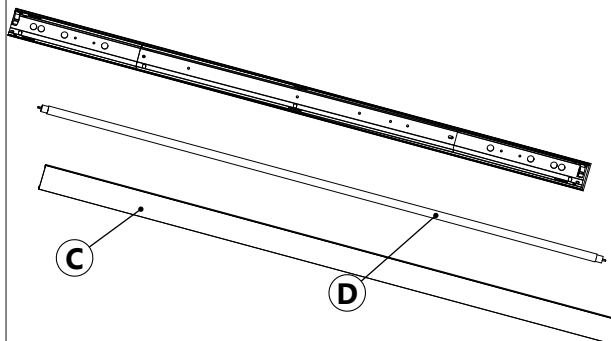


2

Remove optics (C) to gain access to lamps. Remove lamps (D) if installed.

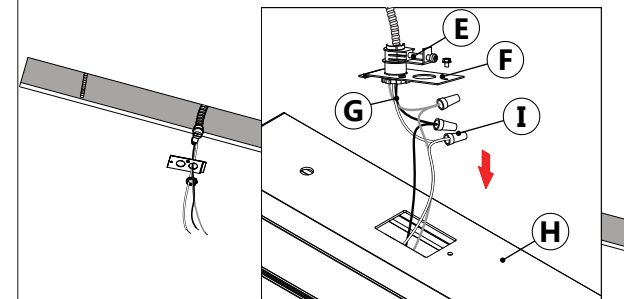


3

Install BX cable connector (E) through the power plate (F). Wire BX cable wires (G) to fixture (H) using the wire nuts (I). Push connected wires into fixture (H). Fasten knockout plate (F) to fixture (H).

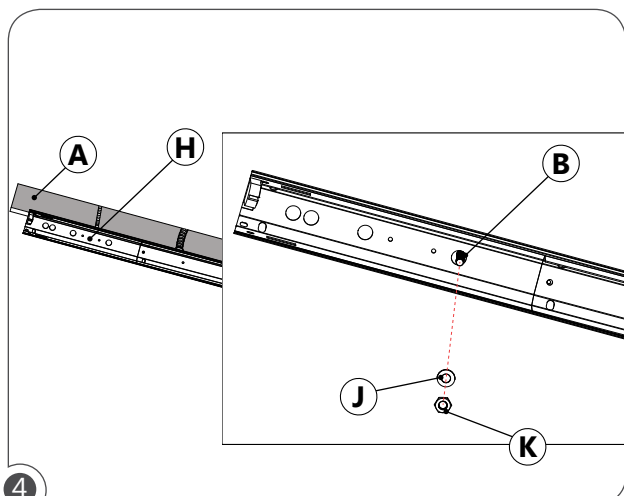


4

Push fixture (H) into cut hole (A) in drywall, aligning 1/4-20 threaded rods (B) with the mounting holes on top of fixture (H). Secure fixture (H) with washers (J) and nuts (K).

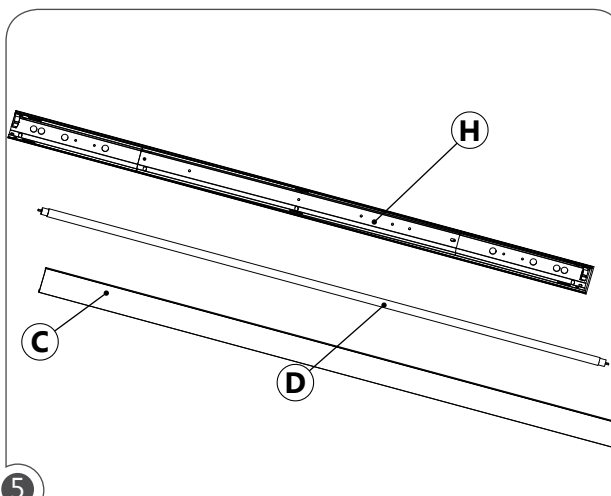

5

Re-install the lamps (D) and optics (C) in the fixtures (H). Power can now be turned on.

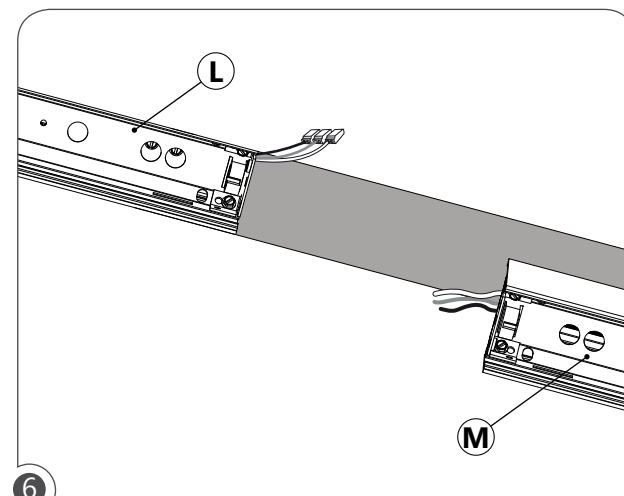

6


**CONTINUOUS ROW:** Follow steps 1 to 4 for the first section (L) of the fixture.




**WARNING:** RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.




# **RECESSED DRYWALL MOUNT INSTALLATION INSTRUCTIONS FOR FLANGELESS (D) AND VISIBLE FLANGE (DF)**

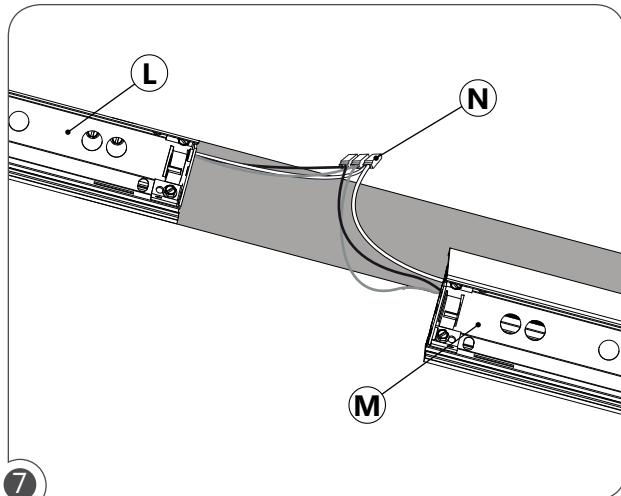


**7** Make wire connections with quick-wire connectors (N) between the joining sections (L) and (M).

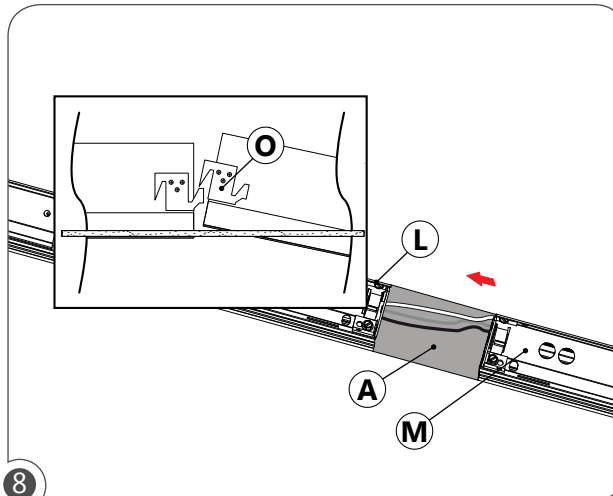

**8** Insert the second sections (M) into the drywall hole (A). Slide the sections together and hook the joining hooks (O) to each other to join sections and aligning 1/4-20 threaded rods with the mounting holes.

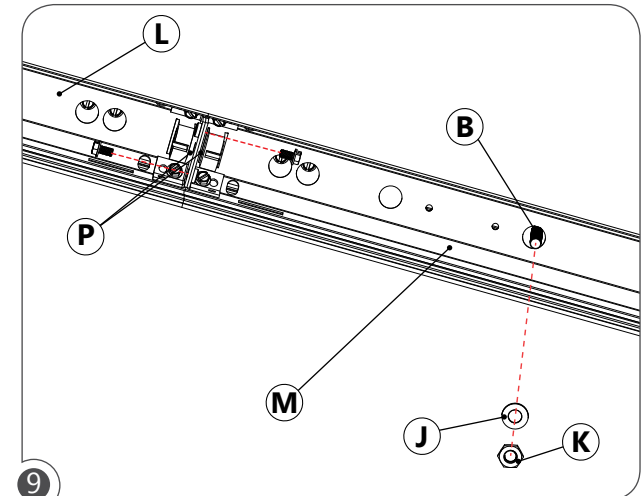

**9** Secure the second section (M) to the 1/4-20 threaded rods (B) with washers (J) and nuts (K). Secure joining brackets (P) to each other using the supplied screws.

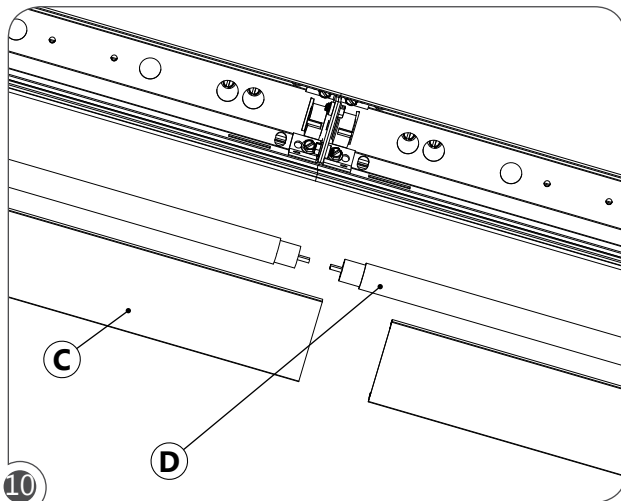

**Follow steps 6 to 9 for the next sections.**

Re-install the lamps (D) and optics (C) at the end of the installation process.



**WARNING:** RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

