


● PART LIST



- | | |
|----------------------------|------------------------------|
| C Fixture 1 | I BX cable wires (by others) |
| D Safety brackets | J Wire nuts |
| E T-bar runner (by others) | K Screws |
| F Support wire (by others) | L Fixture 2 |
| G BX cable connector | M Screws |
| H Knockout plate | N Quick-wire connectors |
| | O Joining bracket |

● T-BAR STYLE MOUNTING

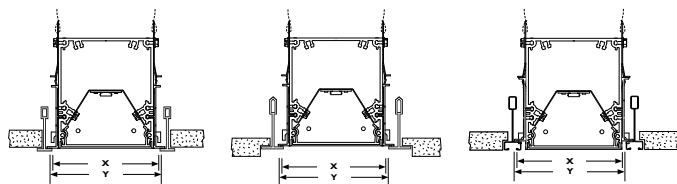


TB 15/16\"+9/16\" T-BAR **TG** 15/16\"+9/16\" TEGULAR **ST** SCREW SLOT T-BAR


● SECTION VIEW

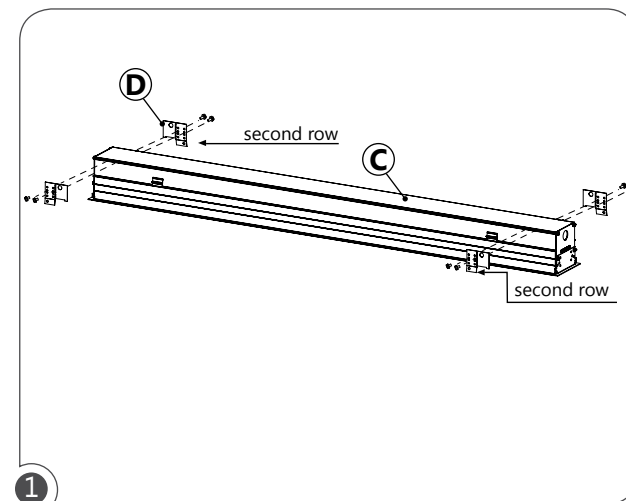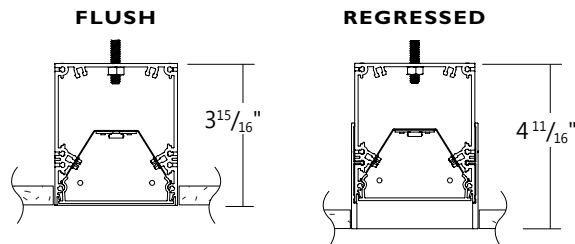


- 1** Rotate safety brackets (D) and screw to the fixture (C) using the second row of holes on the brackets.

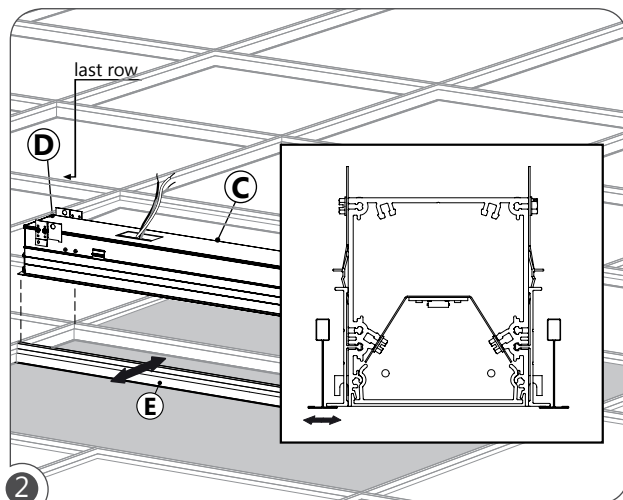

- 2** Adjust T-bar runner (E) to the fixture width. Raise fixture (C) above ceiling, lower fixture (C) onto flanges of T-bars runners (E) from the top. Ensure that safety brackets (D) sit above the T-bars (E).

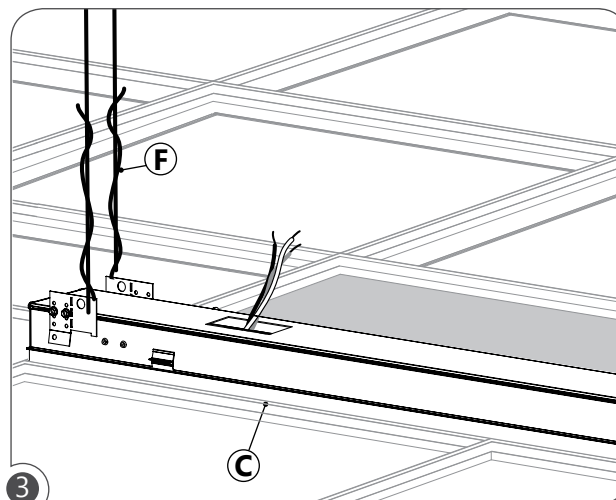


- 3** Secure support wires (F) to the fixture (C).

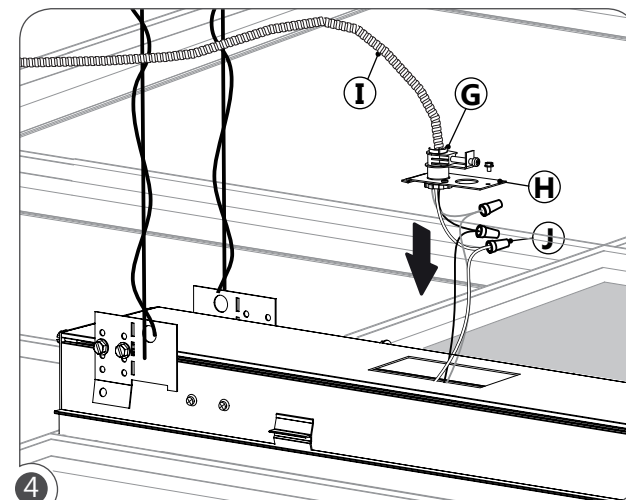


- 4** Install BX cable connector (G) in power plate (H). Wire BX cable wires (I) to fixture (C) using provided wire nuts (J).

FILENAME:BMR-BBR-B6R.TBAR.INST February 12, 2016


Page: 1 / 2

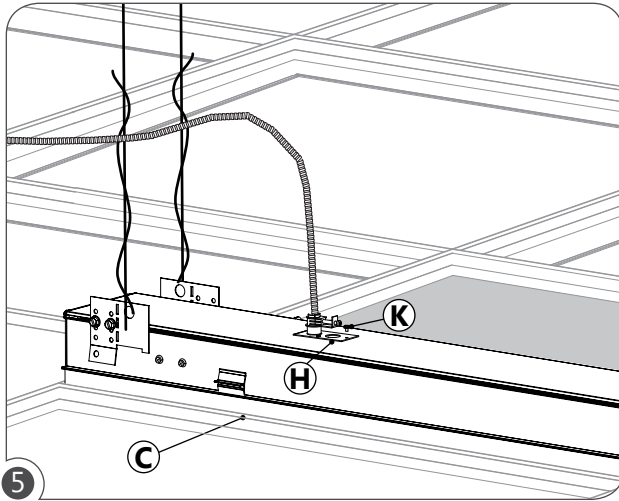


5 Secure knockout plate (H) to fixture (C) by fastening screws (K).

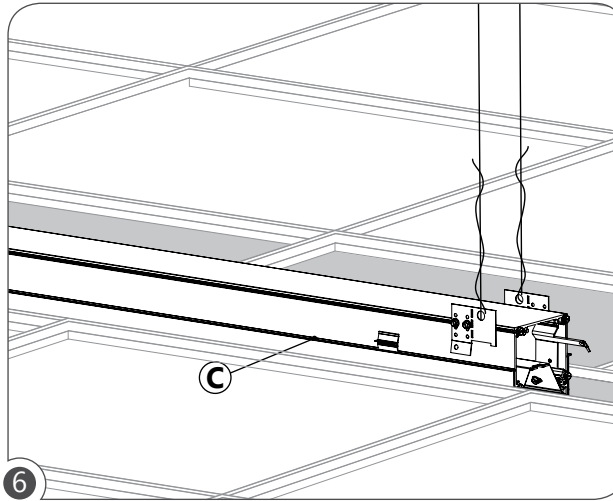


6 **CONTINUOUS ROW:** Follow steps 1 to 6 for the first fixture (C) in the row.

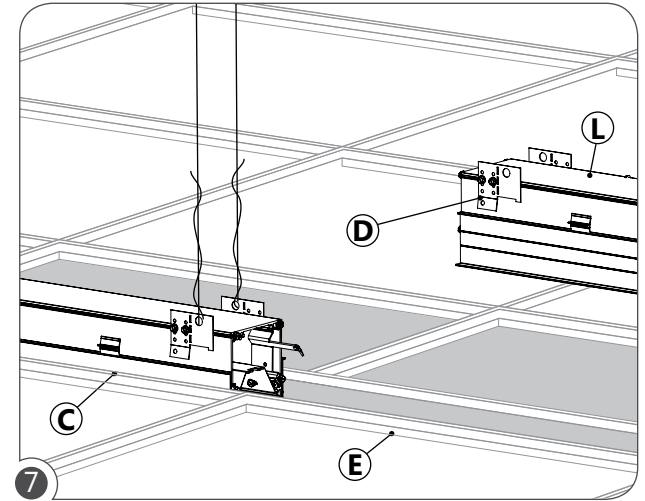

7 Repeat steps 1 and 2 for the second fixture (L). Raise fixture (L) above ceiling, lower fixture onto flanges of T-bars runners (E) from the top. Ensure that safety brackets (D) sit above the T-bars (E).

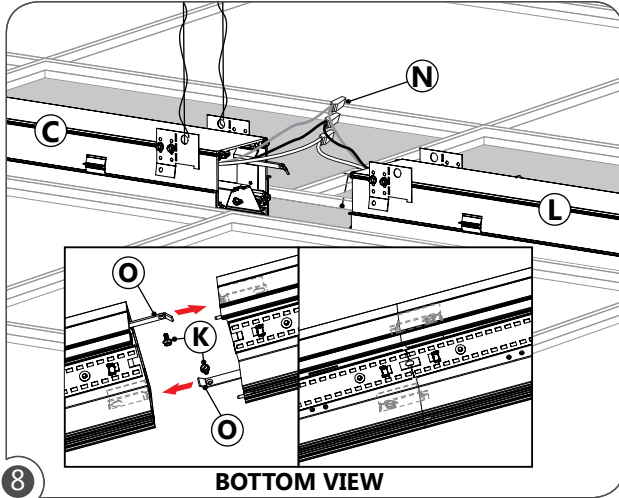

8 Make wire connection with quick-wire connectors (N). Slide fixtures (C) and (L) together, join the brackets (M) and put screw (K) in place

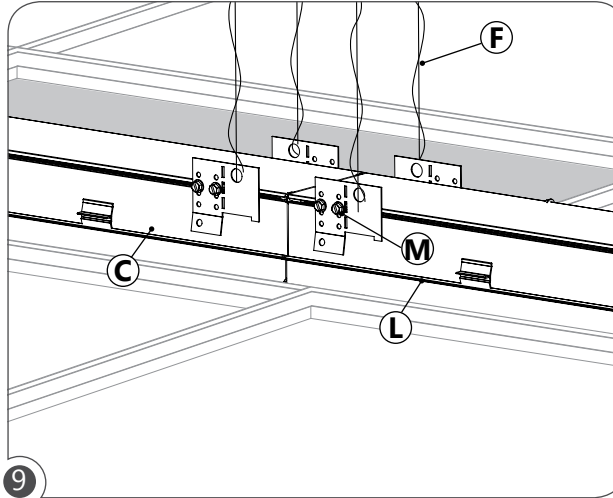

9 Secure the two fixtures using screws (M). Secure support wires (F) to the fixture (L).