


COMPLIES WITH:
ANSI/ASME A112.18.1
CSA B125
IAPMO Listed
CSA Certified
ICC/ANSI A117.1/ADA



**Model
6716815
Shown**

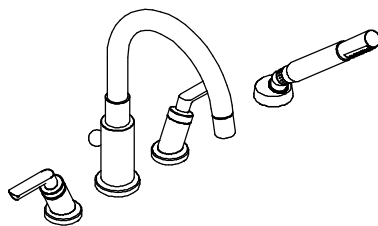

BATH VALVES

- Trevi™ Two Handle Roman Tub Valve
- 4 Hole Applications
- Temperature and Volume Controlled With Handles
- Automatic Diverter Spout
- Hand Held Retractable Shower
- 4 1/2" to 10" Between Mounting Holes
- Flexible Ledge Mount


STANDARD SPECIFICATIONS

- Two handle Roman tub valve with hand held shower for concealed mounting on 4 hole applications.
- Control mechanism shall be of rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- Minimum 4 1/2" to maximum 10" distance between holes.
- Recommended hole size: Valve units: 1 1/4"
Spout: 1 1/8"
Shower nest: 1 3/8"
- All operating parts shall be replaceable from the top.
- Conventional installation kit adjusts to 3" maximum deck thickness.
- Spout with integral diverter, vacuum breaker not required.
- Hand held shower flows 2.5 gpm @ 80 psi.


AVAILABLE FINISHES

Suffix	Finish
BN	Brilliance® Brushed Nickel
PC	Polished Chrome

Standard Features	
Washerless ceramic valving	◆
With hand shower	◆
Automatic diverter spout	◆
Flexible connection hoses	◆
1/2" I.P.S. Adapters	◆
Shower finish matches faucet finish	◆

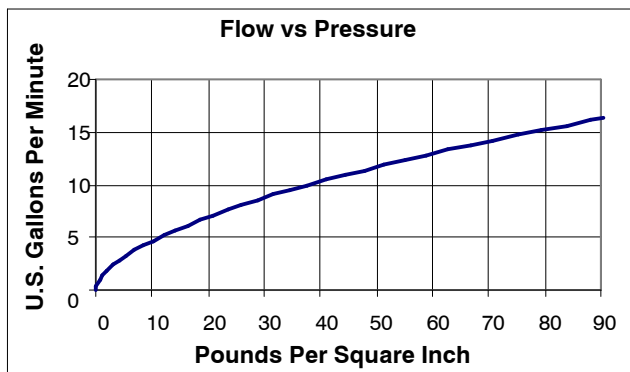

Specific Features:

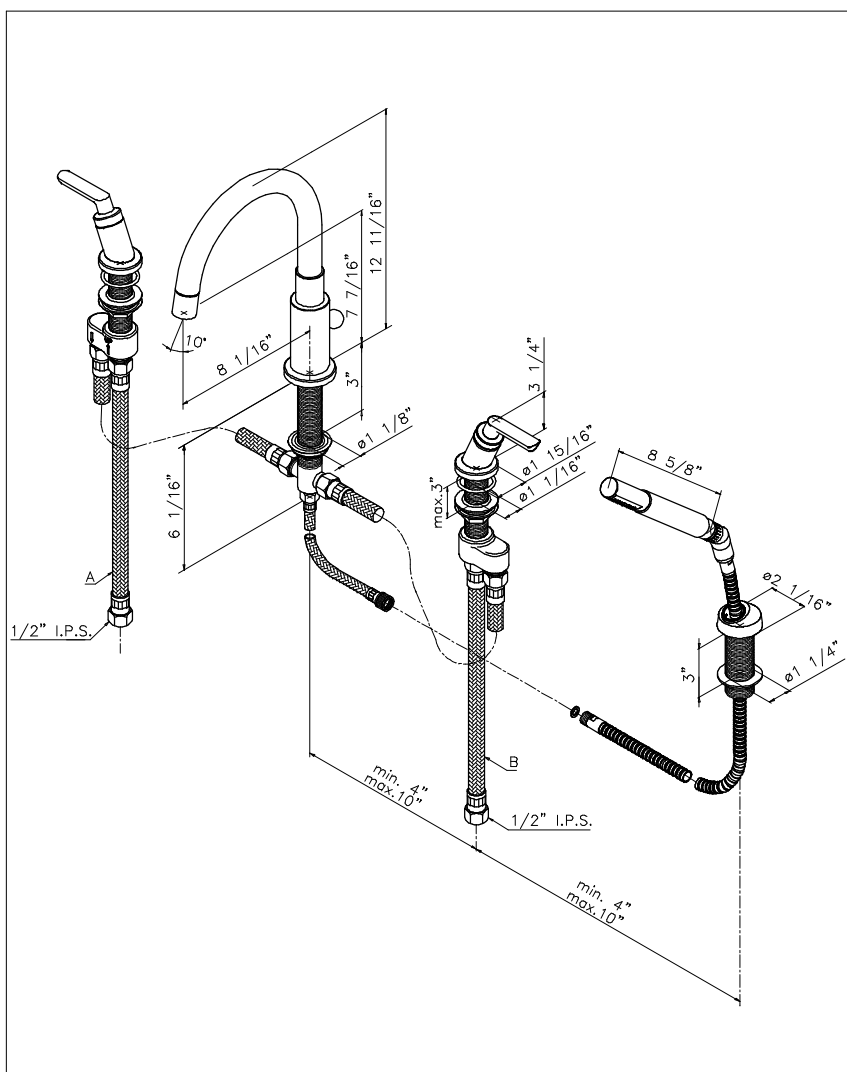

Metric Conversion Chart

Gals./Min	0.5	1.0	1.5	2.0	2.5	3.0	10.0	10.5	12.0	17.5	18.0	19.0	psi	60.0	80.0
Ltrs./Min	1.9	3.8	5.7	7.6	9.5	11.4	38.0	40.0	45.0	66.0	68.0	72.0	kPa	414	551