



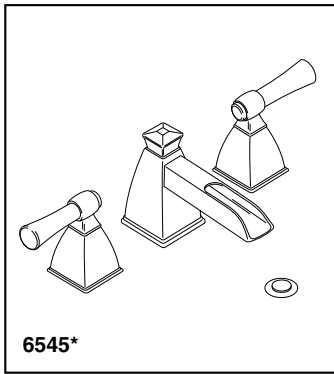

Submitted Model No.: _____

Specific Features: _____

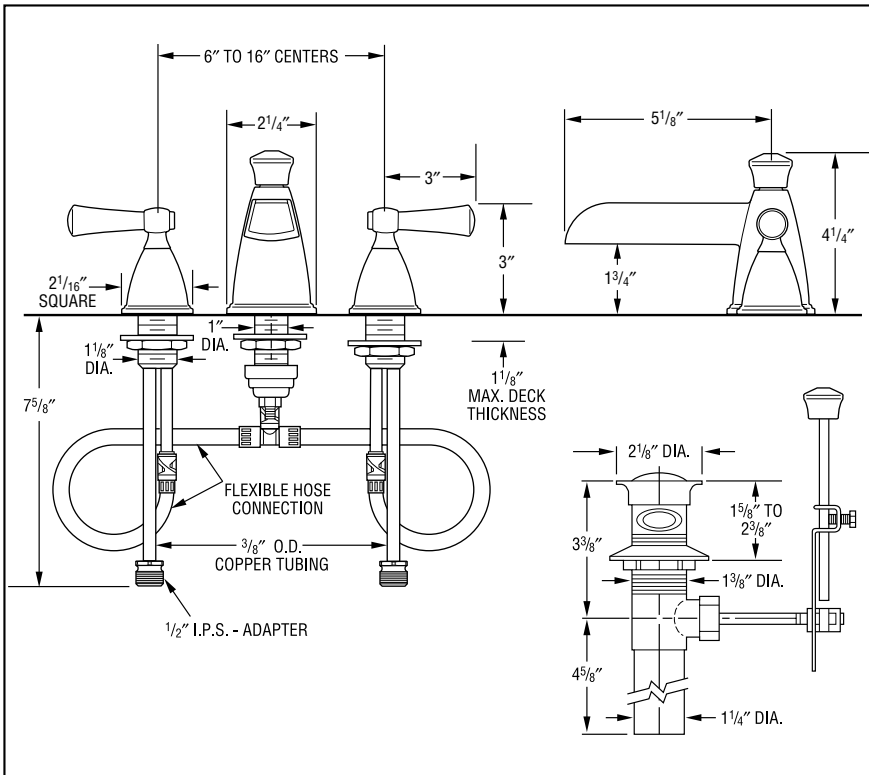

BRIZO™

LAVATORY FAUCETS

- Vesi™ Collection Open Channel Spout
- Two Handle Widespread
- Ceramic Disc Valving
- Three Hole Sink Applications
- 6" to 16" Centers
- Quick-Snap® Installation



COMPLIES WITH:

ANSI/ASME A112.18.1

CSA B125


IAPMO Listed

CSA Certified

ICC/ANSI A117.1/ADA

STANDARD SPECIFICATIONS:

- Two handle lavatory faucets for concealed mounting on three hole sinks.
- Widespread - 6" to 16" centers.
- Ceramic disc valving.
- Hot and cold stems are interchangeable.
- Solid brass fabricated end valve and spout bodies.
- 1/4 turn stops may be removed for 180° rotation.
- Metal drain has pop-up type fitting with plated flange and stopper.
- Quick connect hoses and self-locating bases.

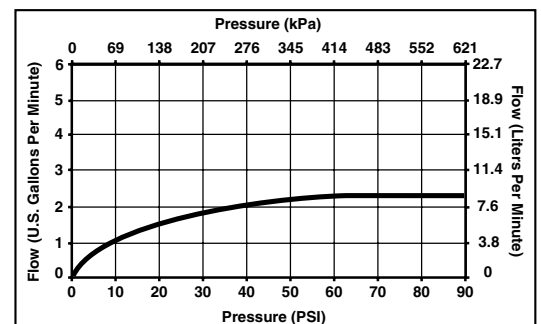

Standard Features	6545*
Washerless	◆
3/8" O.D. Copper Tube Inlets	◆
Metal Pop-up Drain	◆
1/2" I.P.S. Adapters	◆
1/4 Turn Stop	◆
Brass Stem	◆
Ceramic Disc Valving	◆
Quick Connect Hoses	◆
Self-Locating Bases	◆

*To specify finish add suffix

Available Finishes

Suffix	Finish
BB	<i>Brilliance</i> ® Brass
BN	<i>Brilliance</i> ® Brushed Nickel
BZ	<i>Brilliance</i> ® Brushed Bronze
PC	Polished Chrome

Delta Faucet Company
 Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2004 Masco Corporation of Indiana