

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes matching finish side spray with Hydrolock® quick connect system
- Hydrolock® quick connect installation

OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel

FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE


- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Water Drinking Act
- **ADA**  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

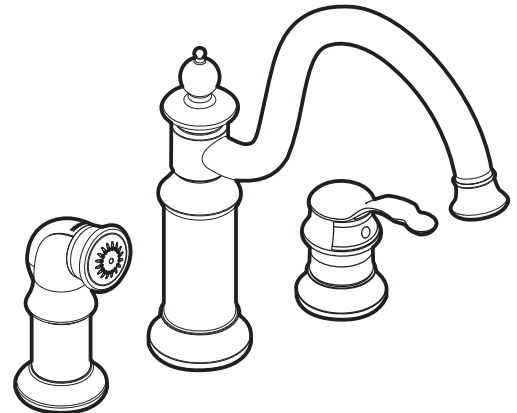

Waterhill™
Single-Handle Kitchen Faucet
Models: S711 series

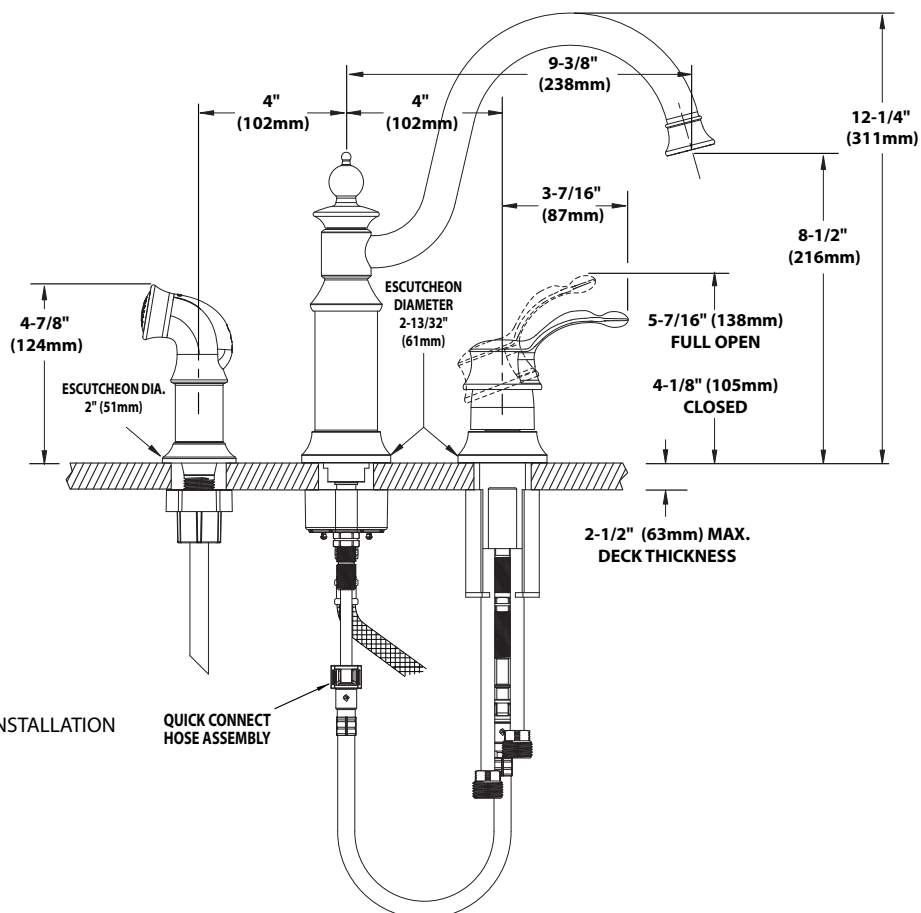

NOTE: MINIMUM DIA. HOLES FOR INSTALLATION
Spout = 1-1/4" (32mm)
Handle = 1-1/4" (32mm)
Side Spray = 1" (25mm)

QUICK CONNECT
HOSE ASSEMBLY