

PCS36B/3EUC

PROPRIETARY AND CONFIDENTIAL.

ALL DIMENSIONS HAVE A $\pm 1/16"$ TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.




WARNING

- Do **NOT** remove tape!
- For indoor use only.
- For use on a normally dry work surface.
- If any malfunction occurs, do not attempt to disassemble or repair.
- Avoid placing the unit in a high temperature environment or near fire.
- Avoid liquid spills into outlet.
- Do not insert foreign objects into the socket.
- Allow enough clearance for part operation.

SPECIFICATIONS

- 6 ft. cord length.
- Table thickness is $3/4"$ MIN. to $1-11/16"$ MAX.
- Plug dimension is $1-11/32" \times 1-1/32" \times 7/8"$.
- USB-A and USB-C ports are for charging use only.

TABLE OF CONTENTS



..... 1X PCS36B/3EUC




..... 1X Wire Manager



..... 2X Metal Clip




..... 2X Wing Clamp

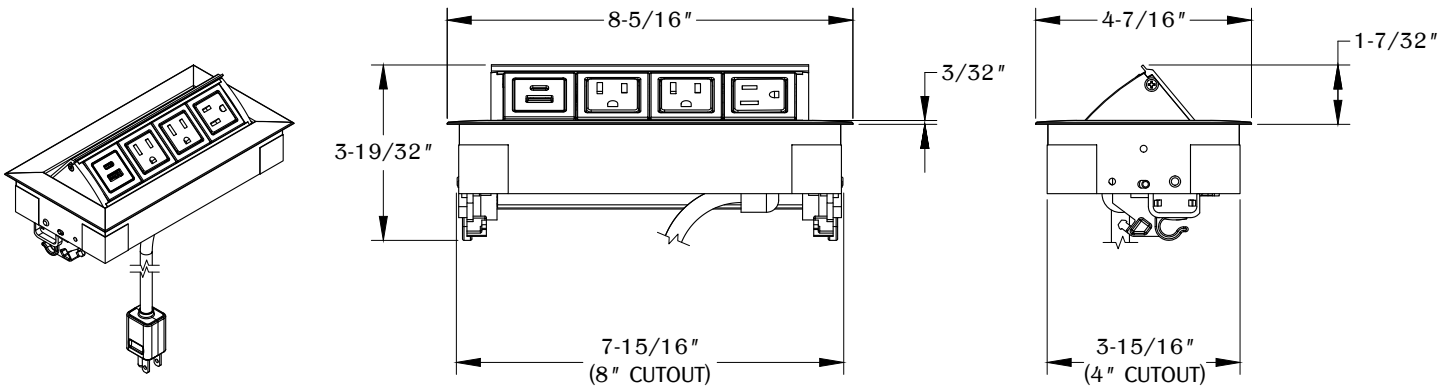

FRONT VIEW


SIDE VIEW

1

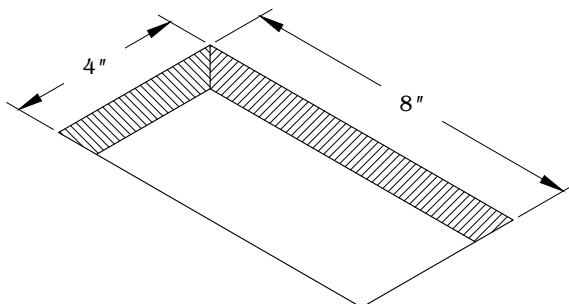

Determine the position and location of the unit in the work surface. Cut the hole at $8" \times 4"$. Place and allow enough clearance for unit operation. DO NOT place unit where the cables are strained or trapped.

2

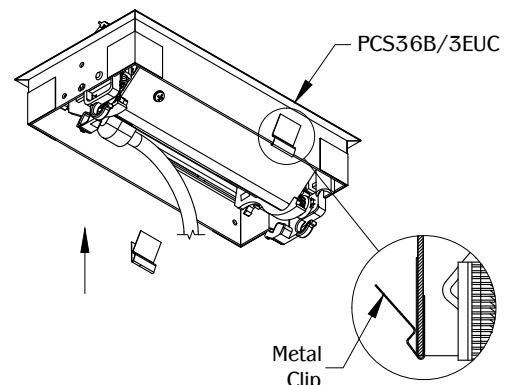


Place metal clip near the ends of the back of the unit. (NOTE: Metal clips are for use in hard surface material only as an optional mounting means.)

PCS36B/3EUC

PROPRIETARY AND CONFIDENTIAL.


ALL DIMENSIONS HAVE A $\pm 1/16"$ TOLERANCE UNLESS OTHERWISE SPECIFIED. WE DO NOT RECOMMEND DRILLING OR CUTTING ANY HOLES BEFORE RECEIVING A PRODUCT OR A PRODUCT SAMPLE.

3

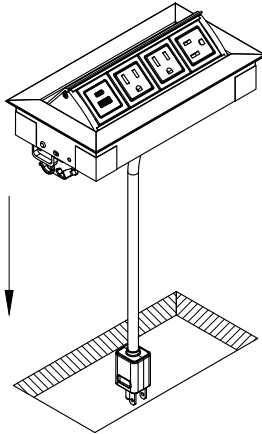


Guide the power cord through the cutout. Install the unit into the cutout and make sure it is fully leveled onto the surface.

4

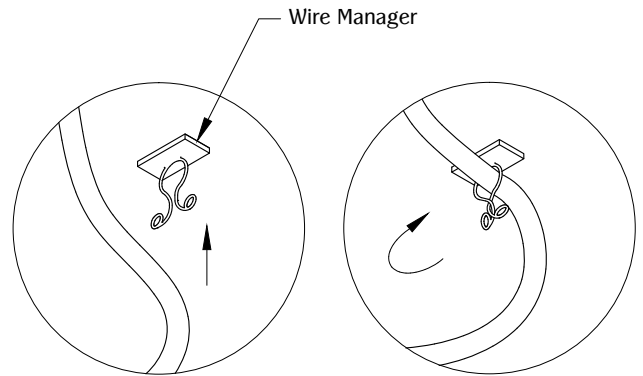

Affix optional wire manager under desk for cable management.

5

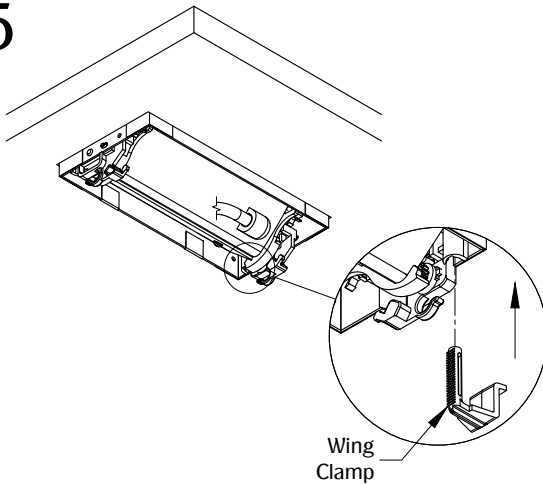

Secure unit by turning bottom wing clamp.