SHOW HOUSE by MOEN

Specifications

DESCRIPTION
- Metal construction with wrought iron finish
- 1/2" IPS connections
- Includes metal pop-up type waste assembly
- For use with S948 valve

OPERATION
- Lever style handles
- Maximum handle rotation angle is 90˚ to full on for either handle
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW
- Aerator is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE
- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS
- Third party certified by CSA and IAPMO to meet ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

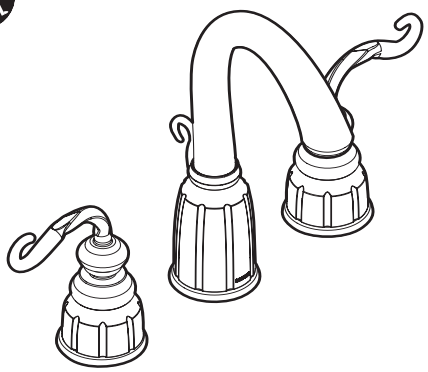

CASA®
Two-Handle Widespread Lavatory Faucet Trim

Model: TS883WR

NOTE: This faucet is designed to be installed thru 3 holes, 1" min. dia.

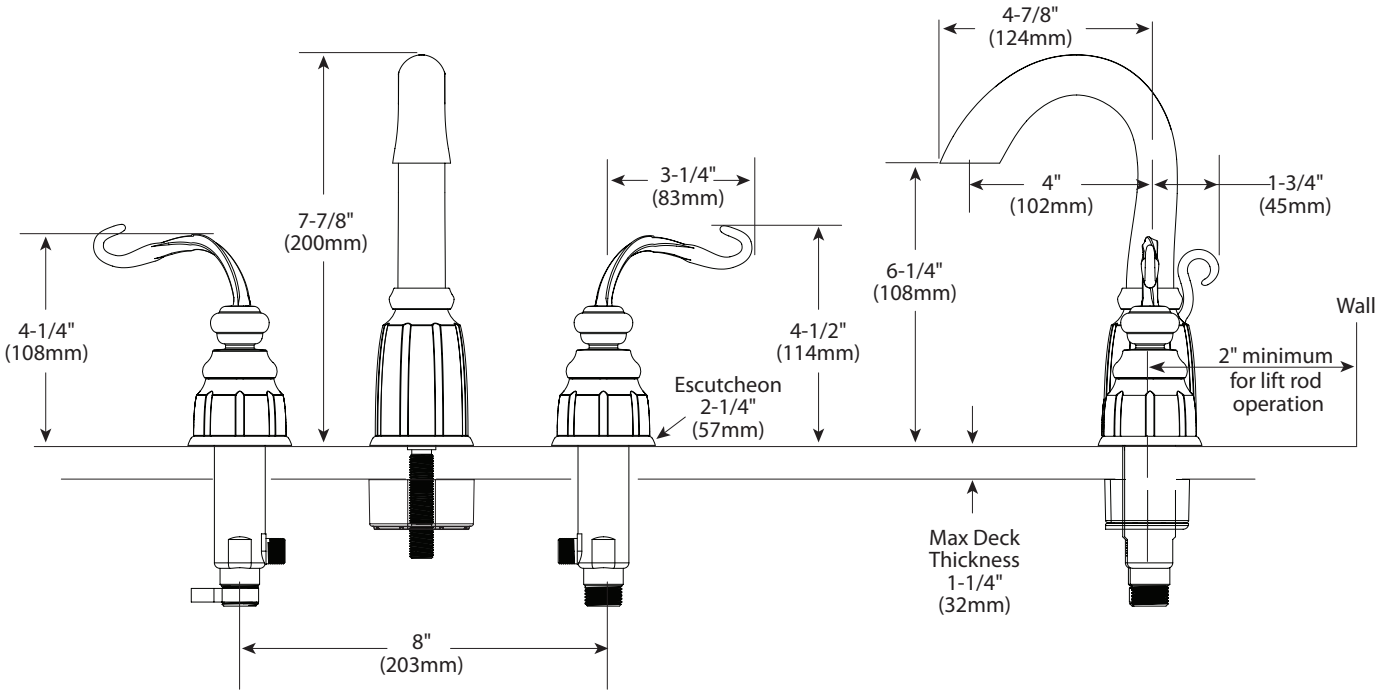

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com