



Buy it for looks. Buy it for life.®

## Specifications

### DESCRIPTION

- Metal construction with chrome, oil-rubbed bronze, LifeShine® brushed nickel or pewter finish
- For installations from 8" (203mm) to 10" (254mm) centers
- Designed to be installed on decks up to 2-1/8" (54mm)
- The tub fill spout is a slip fit design and the supplies are 1/2" type K, copper tubing
- Hot and Cold indicators included

### OPERATION

- Lever style handles
- Can be installed with any Moen Deck Mounted Roman Tub Trim Kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

### FLOW

- Designed to deliver 18 gpm at 40 psi (68 L/min).

### CARTRIDGE


- Nonmetallic and stainless steel materials

### STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein.

### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

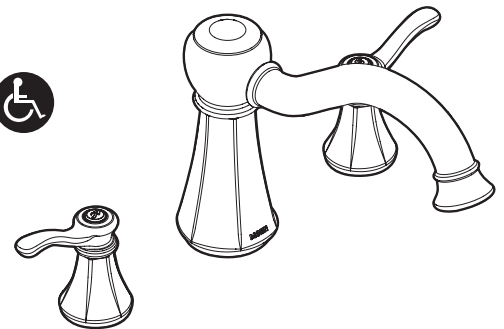

### Vestige™ Roman Tub Trim Only

**Models:** T932, T932BN,  
T932ORB, T932PW

**Valve:** 4999, 64999, 4997, 64997

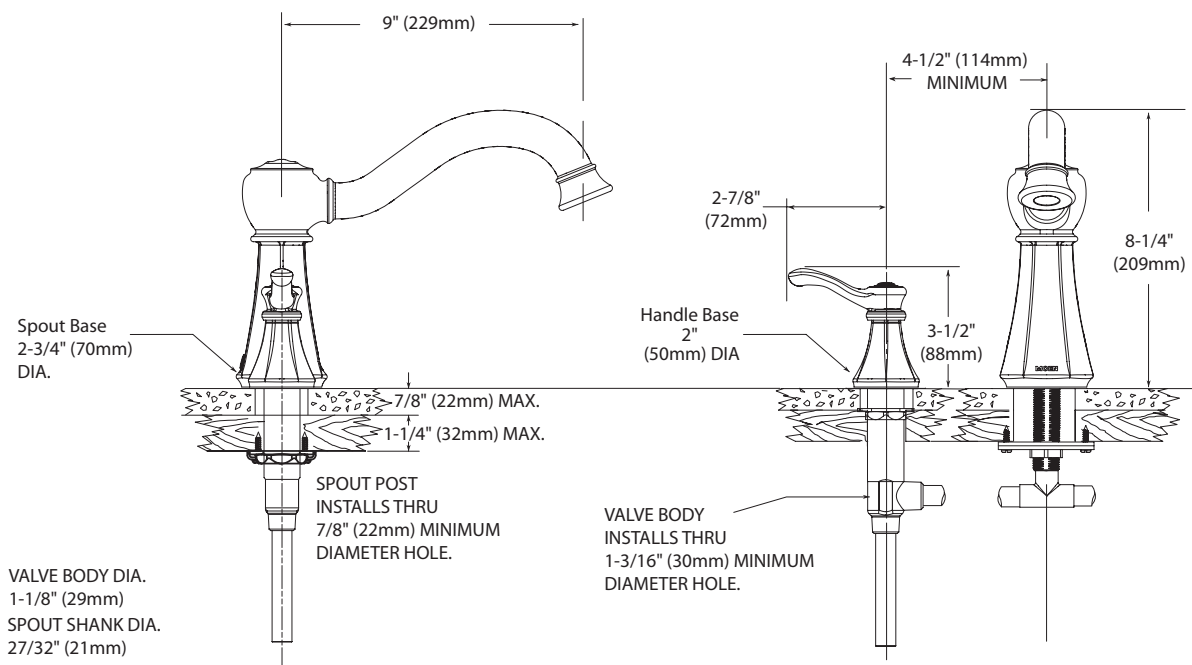

**NOTE:** THE INSTALLATION SHOWN IS FOR TILE DECKS, THIS VALVE WILL ALSO FIT STEEL, CAST IRON OR PLASTIC DECKS

### CRITICAL DIMENSIONS

(DO NOT SCALE)