



Top Specification:

Power unit fits with tops of this size:

- Range of top width: 84" - 114"
- Number of bases: 2 Bases
- 9' Power infeed cord provides sufficient length to route through end base
- Top Power one location cutout code CB1C




Electrolite 9PCB21C corded unit

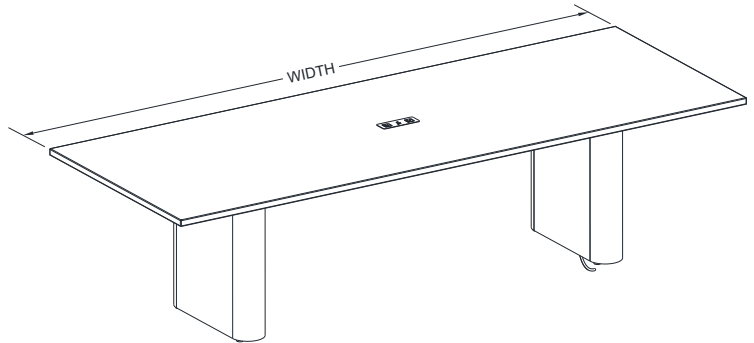


Content: item (quantity)

- Electrolite power unit (1)
- Clamp bracket (2)
- Clamp Thumb Screws (4)
- Cable mounting clips (10)
- #6 x 5/8" mounting screws (10)



Electrolite Power Unit




Clamp Brackets



Clamp Thumb Screws

Tools Required:

- #2 Phillips Head
- Drill




Cable Mounting Clip




Mounting Screw

Step 1 - Electrolite installation to top

1. Route Electrolite unit connection cord through top cutout as power unit is positioned into opening.
2. Place keyhole of clamp brackets over studs located on sides of unit, sliding down to latch in position.
3. Insert clamp thumb screws into clamp brackets, hand tightening against underside of top.

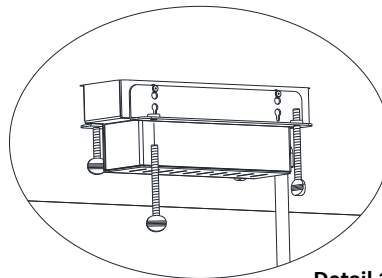


Detail 1

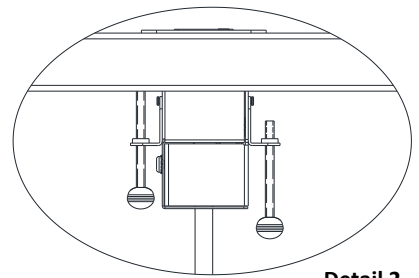

Detail 2

Securing Cord

1. Install cable mounting clips along cords spacing no more than 18" apart with #6 x 5/8" mounting screws to secure cords.

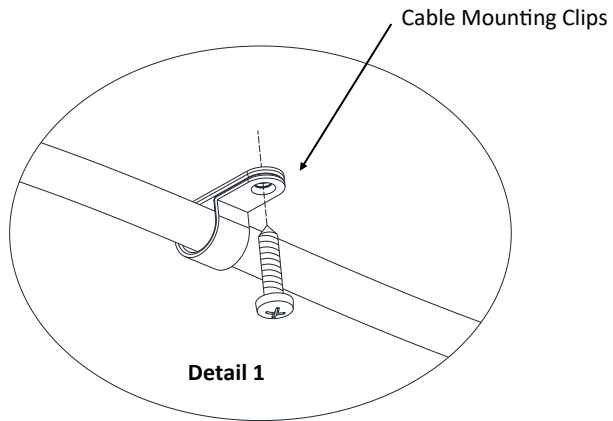

Power Cord Connection

1. Install cable mounting clips to route cord to wire management or base to channel to floor power source outlet. Excess cord can be managed in vertical channel or secured to table with mounting clips.
2. Plug power cord into building power source and check unit outlets to verify power.

