

**CEILING COLLECTION** 

### **GENERAL PRODUCT INFORMATION**

CEILING MOUNT ONLY.
SUITABLE FOR DRY LOCATIONS.
MIN 75°C SUPPLY CONDUCTORS.
ELECTRICAL RATINGS:
120VAC, 50/60 HZ
1 MODULE, 7 LEDs, 13W OUTPUT 15W INPUT.



TWODOLL, TEEDS, TOW OUT OF TOW IN

This product is dimmable with a low-voltage electronic dimmer.


There are no serviceable parts in this fixture. Do not disassemble. Do not attempt to replace the lamp.




#### **CAUTION**—RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and DISCONNECT POWER TO THE ELECTRICAL BOX.


## Install the Fixture Base

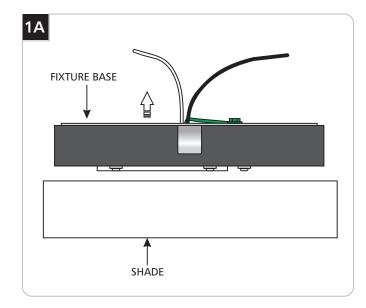

1 Pull the fixture base out of the shade.

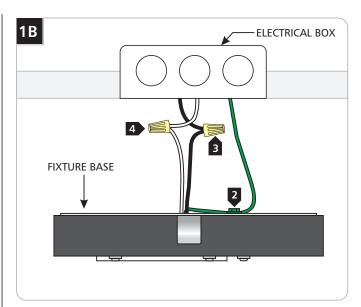


- Connect the fixture to a suitable ground according to local electrical codes.
- Connect the black fixture wire to the hot power line wire with a wire nut.
- Connect the white fixture wire to the neutral power line wire with a wire nut.

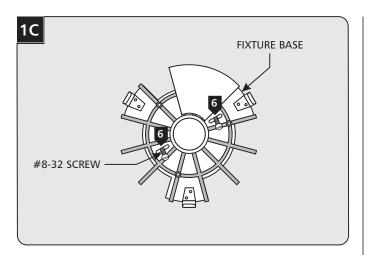


- Place all wires and wire nut connections inside the electrical box.
- 6 Attach the fixture base to the electrical box with the two #8-32 screws provided.

# **Attach the Cover**



Align the plastic tabs inside the cover with the heat sink fins and push the cover onto the fixture base.

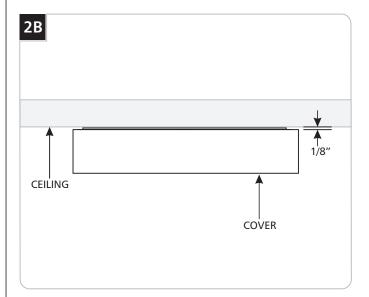

The fixture is designed to have a 1/8" gap between the cover and the ceiling. Do not attempt to close this gap. It is essential for the fixture to function properly.

# **SAVE THESE INSTRUCTIONS!**



7400 Linder Ave, Skokie, IL 60077 847.410.4400

### www.techlighting.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company