

PENDANTS

GENERAL PRODUCT INFORMATION:




This product is suitable for damp locations.




Installing the Glass Shade & Lamp

CAUTION: To reduce the risk of a burn or electric shock during relamping, disconnect the power to the fixture.

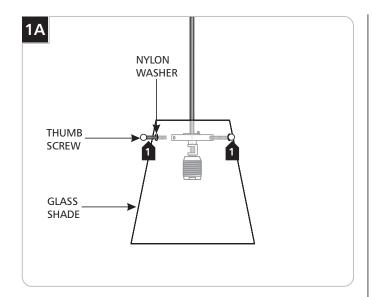


1 Line up the glass shade holes with the disk holes and secure the glass shade to the disk with provided thumb screws and nylon washers.



Use MAX 18 Watt GX24Q-2 Base
Triple Tube Compact Fluorescent Lamp.

2 Push the lamp pins completely into the socket holes.

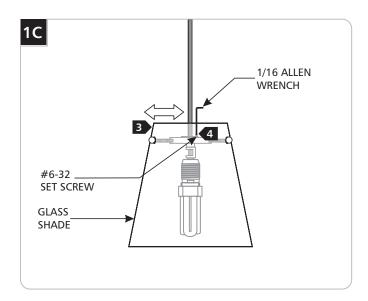

- Position the glass shade so that the weight of the glass is evenly balanced on the disk.
- Tighten the #6-32 set screw on the disk with the 1/16 Allen wrench to hold the glass shade in position.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.2thousanddegrees.com

© 2008 Tech Lighting, L.L.C. All rights reserved. The "2thousand degrees" graphic is a registered trademark of 2thousand degrees. 2thousand degrees reserves the right to change specifications for product improvements without notification.

A Generation Brands Company