




SAMPLE CATALOG NUMBER
CB6374 - **2F18(MVOLT)** - **BCA** - **JB9005** - **XEM**
 Model Number Lamping Option (Voltage) Front Panel and Housing Finish Center Bar and Fastener Finish Option


Model		Lamping Options		Finish		Diffuser Options		Options
Model Number	Dimensions			Front Panel and Housing	Center Bar and Fastener			
CB6374 	W	6-7/8"	(175 mm)	2F18	PTD	PTD	• AR • SL • PP • SR White acrylic standard	DCC
	H	16-1/8"	(410 mm)		BA	BA		REM
	D	4"	(102 mm)		BCA	BB		XEM
	MC	6-1/2"	(165 mm)		SNA	BCA		XPS
					SNA			
CB6372 	W	7-1/4"	(184 mm)	2FS14 2FS24	PTD	PTD	• AR • SL • PP • SR White acrylic standard	DCC
	H	32"	(813 mm)		BA	BA		REM
	D	3-1/4"	(83 mm)		BCA	BB		XPS
	MC	15-1/2"	(394 mm)		SNA	BCA		
					SNA			

LINE DRAWINGS

CB6374



CB6372



ABBREVIATION KEY

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F18** 18w long twin tube, 2G11 base, FLR (MVOLT)
 - FS14** 14w T-5, mini bi-pin base, FLR (MVOLT)
 - FS24** 24w T-5/HO, mini bi-pin base, FLR (MVOLT)
- MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. **BRNZ** for Bronze)
- BA** Brushed Aluminum
- BB** Brushed Brass
- BCA** Brushed Chrome Alternative
- SNA** Satin Nickel Alternative

Diffuser Options (see inside back cover)

- **AR** Arctic Crush Lumicor®
 - **PP** Paper Leaf Lumicor®
 - **SL** Silver Spun Lumicor®
 - **SR** Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard unless other diffuser option is specified

Options

- DCC** Damp clear coat required for all metal finishes in damp locations
- REM** Remote emergency battery pack for fluorescent lamping
- XEM** Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
- XPS** Express 10 day shipment

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number **LER Report page**
 CB6374-2F18 38 06798 413

See report on indicated page for complete detail

Candela Distribution

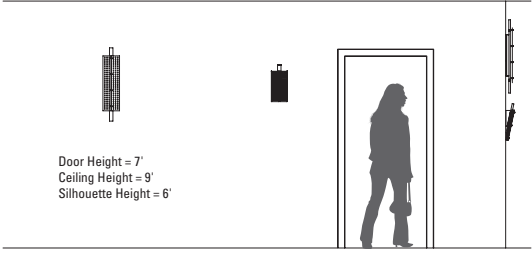




CB6374-BCA-JB9005



CB6372-BA-SNA

COMPANIONS



FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge metal housing
- Solid metal accents
- Heavy wall extruded tubular metal center bar
- Heavy gauge perforated aluminum front panels
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials (except CB6286)
- Easy tool-less relamping
- Fluorescent lamping
- High power factor electronic ballast
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Alternate diffuser materials
- Increase or decrease fixture height and/or width
- Solid face panels
- Custom window cutout in housing panels
- Fluorescent lamping up to (2) 54w T-5/HO with increased housing height
- Fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty