
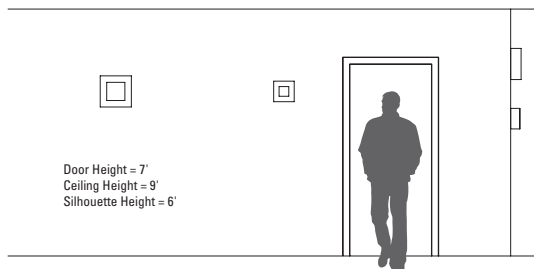



SAMPLE CATALOG NUMBER

CB3106 - 2QF26(MVOLT) - PG7032 - DR8012 - XPS
 Model Number Lamping Option (Voltage) Housing Finish Background Finish Option

Model		Lamping Options		Finish		Diffuser Options		Options		
Model Number	Dimensions			Housing	Background					
CB3126 <i>VDA</i>	W	9"	(229 mm)	2QF18 2N60T10	PTD	PTD	• AR • GL • PP	• SL • SR	• BL	• TL
	H	9"	(229 mm)						FUSE	XEM
	D	4"	(102 mm)						REM	XPS
	MC	4-1/2"	(114 mm)							
CB3106 <i>VDA</i>	W	12"	(305 mm)	2LF13 2QF26 2N60T10	PTD	PTD	• AR • GL • PP	• SL • SR	• BL	REM
	H	12"	(305 mm)						• DIM-A	• TL
	D	4"	(102 mm)						• DIM-L	XEM
	MC	6"	(152 mm)						FUSE	XPS
CB3138 <i>VDA</i>	W	9"	(229 mm)	2QF18 2N60T10	SF	PTD	• AR • GL • PP	• SL • SR	• BL	• TL
	H	9"	(229 mm)						FUSE	XEM
	D	4"	(102 mm)						REM	XPS
	MC	4-1/2"	(114 mm)							
CB3118 <i>VDA</i>	W	12"	(305 mm)	2LF13 2QF26 2N60T10	SF	PTD	• AR • GL • PP	• SL • SR	• BL	REM
	H	12"	(305 mm)						• DIM-A	• TL
	D	4"	(102 mm)						• DIM-L	XEM
	MC	6"	(152 mm)						FUSE	XPS

LINE DRAWINGS



ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - QF18 18w quad, 4-pin G24q-2 base, FLR (MVOLT; 347V)
 - QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
 - N60T10 60w T-10, medium base, INC (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- SF Brushed Textured Stainless Steel

Diffuser Options (see inside back cover)

- AR Arctic Crush Lumicor®
- GL Geometric etched glass lens insert
- PP Paper Leaf Lumicor®
- SL Silver Spun Lumicor®
- SR Saffron Taipei Lumicor®

Options

- BL Bottom lens, tempered prismatic glass
- DIM-A Fluorescent dimming, Advance Mark 10, specify voltage (QF26 only)
- DIM-L Fluorescent dimming, Compact SE, specify voltage (QF26 only)
- FUSE Fusing
- REM Remote emergency battery pack for fluorescent lamping
- TL Top lens, tempered prismatic glass, downwatt 2N60 to 2N40
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box).
- XPS Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports


IES File Number	LER	Report	page
CB3126-2QF18	42	01242	405
CB3106-2QF26	34	39226	432
CB3138-2QF18	42	01242	405
CB3118-2QF26	34	39226	432

See report on indicated page for complete detail

Candela Distribution

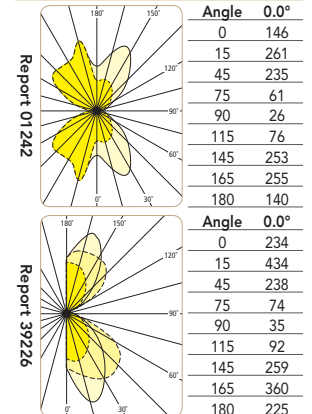

Geometric Etched Glass Lens Insert Diffuser Option (GL)



ART SCONCE™

INDOOR

DECORATIVE AND PERFORMANCE

WALL



CB3106-PG7032-DR8012
(Painted)



CB3118-SF-JB9005
(Stainless Steel)

FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge fabricated stainless steel housing
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Specialty diffuser material
- Custom window cutout in housing
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Glass insert with extra silk screen artwork



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty