




SAMPLE CATALOG NUMBER

CB5102	-	1F38(MVOLT)	-	BA	-	PGD	-	XPS
Model Number		Lamping Option (Voltage)		Bracket and Front Plate Finish		Diffuser Option		Option



Model			Lamping Options	Finish	Diffuser Options	Options
Model Number	Dimensions			Bracket and Front Plate		
CB5100 	W	12" (305 mm)	1F36 1F38 2N40T10	PTD • CB BA PB BB • SN BCA SNA • BCB	• ABA • SL • AR SPD PGD • SR • PP White acrylic standard	XPS
	H	17" (432 mm)				
	D	4" (102 mm)				
	MC	5-3/4" (146 mm)				
CB5102 	W	12" (305 mm)	1F36 1F38 2N40T10	PTD • CB BA PB BB • SN BCA SNA • BCB	• ABA • SL • AR SPD PGD • SR • PP White acrylic standard	XPS
	H	15-1/2" (394 mm)				
	D	4" (102 mm)				
	MC	5-3/4" (146 mm)				

LINE DRAWINGS

CB5100-SPD



CB5102-SPD

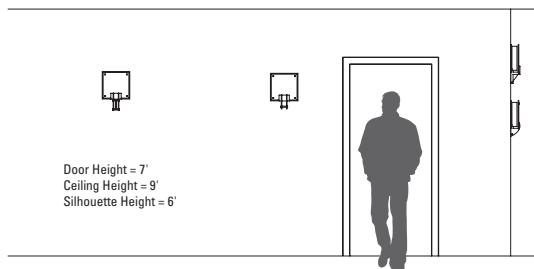

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W** Width
- H** Height
- D** Depth (measured from wall to front of fixture)
- MC** Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F36** 36w in line quad, 2G10 base, FLR (MVOLT)
 - F38** 38w 2D, 4-pin GR10q-4 base, FLR (MVOLT)
 - N40T10** 40w T-10, medium base, INC (120V)
- MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD** Painted - specify color code (ex. BRNZ for Bronze)
- BA** Brushed Aluminum
- BB** Brushed Brass
- BCA** Brushed Chrome Alternative
- **BCB** Brushed Chrome
- **CB** Polished Chrome
- PB** Polished Brass
- **SN** Satin Nickel
- SNA** Satin Nickel Alternative

Diffuser Options (see inside back cover)

- **ABA** Hand Painted Alabaster Alternative (with white acrylic diffuser only)
 - **AR** Arctic Crush Lumicor®
 - PGD** Patterned glass diffuser
 - **PP** Paper Leaf Lumicor®
 - **SL** Silver Spun Lumicor®
 - SPD** One layer of perforated brushed aluminum over a white acrylic diffuser, accents match bracket and front plate
 - **SR** Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard unless other diffuser option is specified

Options

- XPS** Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB5100-1F38	56	02589	408
CB5102-1F38	56	02589	408

See report on indicated page for complete detail

Candela Distribution





CB5100-CB-SPD




CB5102-BA-PGD

FEATURES

- 5 year product warranty
- ADA compliant
- 1/4" thick machined solid metal brackets
- Solid metal accents
- 1/8" thick metal backplate, painted white standard
- Side view of lamp concealed by fabricated 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Easy relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware

COMPANIONS

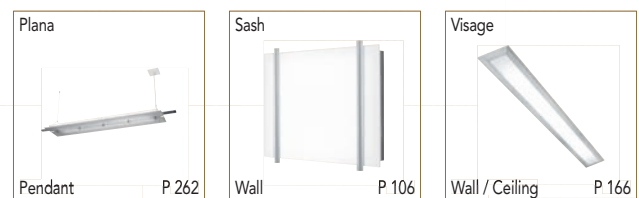

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom applied artwork and/or cutout overlays
- Fused circuit protection
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty