




SAMPLE CATALOG NUMBER
 CB6252 - 2F27(MVOLT) - TW9016 - XPS
 Model Number Lamping Option (Voltage) Finish Option

Model				Lamping Options	Finish	Options
Model Number	Dimensions					
CB6250 	W	10-1/2"	(267 mm)	1F36 2QF18 2N40T10	PTD BCA PB SNA	DCC FUSE REM XEM XPS
	H	11-1/2"	(292 mm)			
	D	4"	(102 mm)			
	MC	5-3/4"	(146 mm)			
CB6252 	W	10-1/2"	(267 mm)	2F27 2N40T10	PTD BCA PB SNA	DCC FUSE REM XEM XPS
	H	17-3/8"	(441 mm)			
	D	4"	(102 mm)			
	MC	8-3/4"	(222 mm)			

LINE DRAWINGS

CB6250 / CB6252




ABBREVIATION KEY

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)
Lamping Options (Voltage)	
F27	27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
F36	36w in line quad, 2G10 base, FLR (MVOLT)
QF18	18w quad, 4-pin G24q-2 base, FLR (MVOLT)
N40T10	40w T-10, medium base, INC (120V)
Specify Voltage or MVOLT MVOLT is a ballast that operates 120V through 277V	
Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BCA	Brushed Chrome Alternative
PB	Polished Brass
SNA	Satin Nickel Alternative
Options	
DCC	Damp clear coat required for all metal finishes in damp locations
FUSE	Fusing
REM	Remote emergency battery pack for fluorescent lamping
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
XPS	Express 10 day shipment

BIM

Complete BIM (Building Information Modeling) for these models may be downloaded from www.visalighting.com

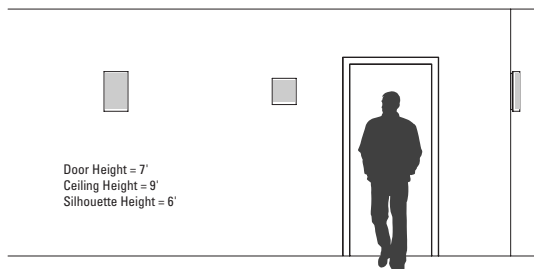



CB6252-TW9016

FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge fabricated metal housing
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- White acrylic diffuser with matte finish
- Acrylic top and bottom lens are standard
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Increase or decrease fixture length and/or width
- Specialty finishes to match architectural detail
- Custom window cutout or logo
- Fluorescent lamping up to (2) 54w T-5/HO with increased housing height
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty