






SAMPLE CATALOG NUMBER

CB5129 - 2F27(MVOLT) - JB9005 - PMO
 Model Number Lamping Option (Voltage) Finish Option



Model		Lamping Options		Finish		Diffuser Options		Options	
Model Number	Dimensions								
CB5126 	W	8-7/8"	(225 mm)	2LF13 2N40T10	PTD • CB BA PB BB • SN BCA SNA • BCB	• ABA • PP • AR • SL PMO • SR	White acrylic standard	DCC FUSE REM XEM XPS	
	H	11-1/4"	(286 mm)						
	D	3-1/2"	(89 mm)						
	MC	5-5/8"	(143 mm)						
CB5127 	W	8-7/8"	(225 mm)	2F27 2N40	PTD • CB BA PB BB • SN BCA SNA • BCB	• ABA • PP • AR • SL PMO • SR	White acrylic standard	DCC FUSE REM XEM XPS	
	H	16-1/4"	(413 mm)						
	D	3-1/2"	(89 mm)						
	MC	8-1/8"	(206 mm)						
CB5128 	W	8-7/8"	(225 mm)	2LF13 2N40T10	PTD • CB BA PB BB • SN BCA SNA • BCB	• ABA • PP • AR • SL PMO • SR	White acrylic standard	DCC FUSE REM XEM XPS	
	H	11-1/4"	(286 mm)						
	D	3-1/2"	(89 mm)						
	MC	5-5/8"	(143 mm)						
CB5129 	W	8-7/8"	(225 mm)	2F27 2N40	PTD • CB BA PB BB • SN BCA SNA • BCB	• ABA • PP • AR • SL PMO • SR	White acrylic standard	DCC FUSE REM XEM XPS	
	H	16-1/4"	(413 mm)						
	D	3-1/2"	(89 mm)						
	MC	8-1/8"	(206 mm)						

LINE DRAWINGS

CB5126 / CB5127



CB5128 / CB5129

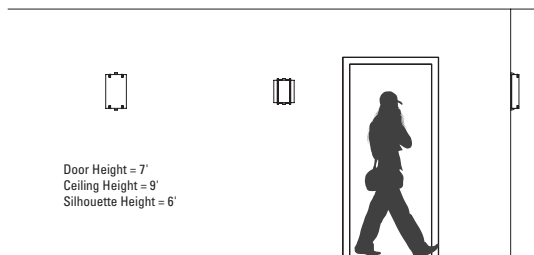

ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- F27 27w long twin tube, 2G11 base, FLR (MVOLT; 347V)
 - LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - N40 40w A-19, medium base, INC (120V)
 - N40T10 40w T-10, medium base, INC (120V)
- Specify Voltage or MVOLT
 MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BCA Brushed Chrome Alternative
- BCB Brushed Chrome
- CB Polished Chrome
- PB Polished Brass
- SN Satin Nickel
- SNA Satin Nickel Alternative

Diffuser Options (see inside back cover)

- ABA Hand Painted Alabaster Alternative
- AR Arctic Crush Lumicor®
- PMO Perforated metal over white acrylic, brushed aluminum
- PP Paper Leaf Lumicor®
- SL Silver Spun Lumicor®
- SR Saffron Taipei Lumicor®

Note: White acrylic diffuser is standard unless other diffuser option is specified

Options


- DCC Damp clear coat required for all metal finishes in damp locations
- FUSE Fusing
- REM Remote emergency battery pack for fluorescent lamping
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box).
- XPS Express 10 day shipment

BIM

Complete BIM (Building Information Modeling) for these models may be downloaded from www.visualighting.com



CB5126-BCA

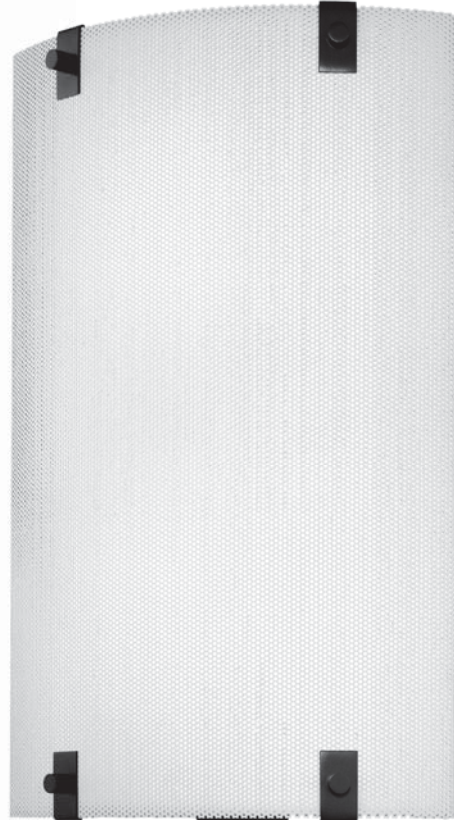

CB5129-JB9005-PMO

FEATURES

- 5 year product warranty
- ADA compliant
- Heavy gauge fabricated metal backbox
- Heavy gauge fabricated end caps match fixture finish
- Solid extruded metal end details
- Solid machined metal accents
- Extruded 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated
- Wrap around diffuser
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom vertical bar detail
- Increase fixture length
- Custom cutout in perforated metal overlay
- Fluorescent lamping up to (2) 54w T-5/HO with increased housing height
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty