




SAMPLE CATALOG NUMBER

CB5182 - 1LF13(MVOLT) - BZ - XPS
 Model Number Lamping Option (Voltage) Finish Option


Model		Lamping Options		Finish		Diffuser Options		Options
Model Number	Dimensions			Housing	Accent Panel			
ST. GERMAIN CB5180 	W 5-1/2" (140 mm) H 11-1/8" (283 mm) D 4" (102 mm) MC 5-1/2" (140 mm)	1LF13 1N60T10		PTD BA BB	BU BZ • VG	• ABA • AR • PP Sandblasted glass standard	• SL • SR	DCC REM XEM XPS
ST. GERMAIN CB5182	W 5-1/2" (140 mm) H 11-1/8" (283 mm) D 6" (152 mm) MC 5-1/2" (140 mm)	1LF13 1QF26 2N60		PTD BA BB	BU BZ • VG	• ABA • AR • PP Sandblasted glass standard	• SL • SR	DCC REM XEM XPS
ST. GERMAIN CB5184	W 7" (178 mm) H 14-1/8" (359 mm) D 7-3/4" (197 mm) MC 7" (178 mm)	2LF13 2QF26 2N75		PTD BA BB	BU BZ • VG	• ABA • AR • PP Sandblasted glass standard	• SL • SR	DCC REM XEM XPS
MIDLAND CRAFTS CB5186 	W 5-1/2" (140 mm) H 11-1/8" (283 mm) D 4" (102 mm) MC 5-1/2" (140 mm)	1LF13 1N60T10		PTD BA BB	BU BZ • VG	• ABA • AR • PP White acrylic standard	• SL • SR	DCC REM XEM XPS
MIDLAND CRAFTS CB5188	W 5-1/2" (140 mm) H 11-1/8" (283 mm) D 6" (152 mm) MC 5-1/2" (140 mm)	1LF13 1QF26 2N60		PTD BA BB	BU BZ • VG	• ABA • AR • PP White acrylic standard	• SL • SR	DCC REM XEM XPS
MIDLAND CRAFTS CB5190	W 7" (178 mm) H 14-1/8" (359 mm) D 7-3/4" (197 mm) MC 7" (178 mm)	2LF13 2QF26 2N75		PTD BA BB	BU BZ • VG	• ABA • AR • PP White acrylic standard	• SL • SR	DCC REM XEM XPS

LINE DRAWINGS


ST. GERMAIN
CB5180




ST. GERMAIN
CB5182 / CB5184




MIDLAND CRAFTS
CB5186



MIDLAND CRAFTS
CB5188 / CB5190



Door Height = 7'
Ceiling Height = 9'
Silhouette Height = 6'



ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

- W Width
- H Height
- D Depth (measured from wall to front of fixture)
- MC Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

- LF13 13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
 - QF26 26w quad, 4-pin G24q-3 base, FLR (MVOLT; 347V)
 - N60 60w A-19, medium base, INC (120V)
 - N60T10 60w T-10, medium base, INC (120V)
 - N75 75w A-19, medium base, INC (120V)
- Specify Voltage or MVOLT
MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

- PTD Painted - specify color code (ex. BRNZ for Bronze)
- BA Brushed Aluminum
- BB Brushed Brass
- BU Brushed Copper
- BZ Brushed Bronze
- VG Verdigris Patina over Copper

Diffuser Options (see inside back cover)

- ABA Hand Painted Alabaster Alternative
 - AR Arctic Crush Lumicor®
 - PP Paper Leaf Lumicor®
 - SL Silver Spun Lumicor®
 - SR Saffron Taipei Lumicor®
- Note: White acrylic diffuser is standard for CB5186, CB5188 and CB5190; Sandblasted glass diffuser is standard for CB5180, CB5182 and CB5184, unless other diffuser option is specified

Options

- DCC Damp clear coat required for all metal finishes in damp locations
- REM Remote emergency battery pack for fluorescent lamping
- XEM Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box).
- XPS Express 10 day shipment

PHOTOMETRICS and BIM


Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB5180-1LF13	18	01990	406
CB5182-1LF13	18	01990	406
CB5182-1QF26	29	01989	406
CB5182-2N60	5	01991	407
CB5184-2QF26	30	08016	415
CB5184-2N75	6		
CB5186-1LF13	18	01990	406
CB5188-1LF13	18	01990	406
CB5188-1QF26	29	01989	406
CB5190-2QF26	30	08016	415
CB5190-2N75	6		

See report on indicated page for complete detail

Candela Distribution

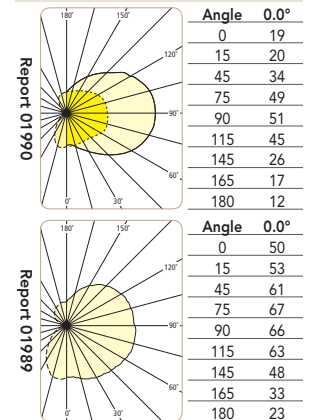


ST. GERMAIN
CB5182-BZMIDLAND CRAFTS
CB5188-BRNZ-OBZ

FEATURES

- 5 year product warranty
- ADA compliant (CB5180 and CB5186 only)
- Fabricated metal housing with internal reinforcing corner extrusions
- Diffuser accent panel creates a three dimensional effect
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Optional specialty diffuser materials available, including some Lumicor® recyclable resin materials
- Tempered sandblasted glass side, top and bottom panels (CB5180, CB5182, CB5184)
- 1/8" thick white acrylic diffuser with matte finish, UV stable, UL-94 HB Flame Class rated panels (CB5186, CB5188, CB5190)
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS

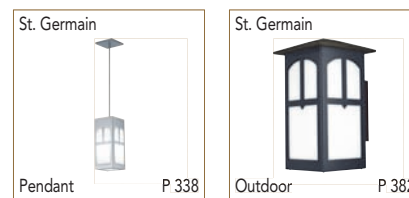

SUGGESTED VARIATIONS

- Specialty finishes to match architectural detail
- Custom window cutout in housing panels
- Increase or decrease housing height and/or width
- Silk screened logo on window panels
- Alternate lamping up to rated wattage listed
- Can accommodate Metal Halide lamping up to 70w with remote ballast
- Add fluorescent dimming ballast
- Fused circuit protection



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty