


SAMPLE CATALOG NUMBER

CB3412	-	LF13(MVOLT)	-	CB	-	REM
Model Number		Lamping Option (Voltage)		Finish		Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
SOLO CB3410	W	11-7/8"	(302 mm)	2F9	PTD • CB	• ABA
	H	7"	(178 mm)	2N40	BB PB	DCC
	D	5-7/8"	(149 mm)		• BCB • SN	REM
	MC	2-1/4"	(57 mm)			XPS
SOLO CB3412	W	15-3/4"	(400 mm)	2LF13	PTD • CB	• ABA
	H	9"	(229 mm)	2QF26	BB PB	DCC • REM
	D	7-7/8"	(200 mm)	2TF26	• BCB • SN	• DIM-A • XEM
	MC	2-7/8"	(73 mm)	2N60		FUSE XPS
APOLLO CB3420	W	12"	(305 mm)	2F9	PTD • CB	• ABA
	H	6"	(152 mm)	2N40	BB PB	AF
	D	5-7/8"	(149 mm)		• BCB • SN	DCC
	MC	2-1/4"	(57 mm)			REM
						XPS
APOLLO CB3422	W	16"	(406 mm)	2LF13	PTD • CB	• ABA
	H	7-7/8"	(200 mm)	2QF26	BB PB	AF • REM
	D	7-7/8"	(200 mm)	2TF26	• BCB • SN	DCC • TL
	MC	2-7/8"	(73 mm)	2N60		• DIM-A • XEM
						FUSE XPS

LINE DRAWINGS

SOLO
CB3410/CB3412



APOLLO
CB3420/CB3422



ABBREVIATION KEY

• Indicated Finish or Option is not available with XPS

Dimensions

W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)

Lamping Options (Voltage)

F9	9w twin tube, G23 base, FLR	(120V; 277V)
LF13	13w twin tube 4-pin, 2GX7 base, FLR	(MVOLT)
QF26	26w quad, 4-pin G24q-3 base, FLR	(MVOLT; 347V)
TF26	26w triple, 4-pin GX24q-3 base, FLR	(MVOLT; 347V)
N40	40w A-19, medium base, INC	(120V)
N60	60w A-19, medium base, INC	(120V)

Specify Voltage or MVOLT
MVOLT is a ballast that operates 120V through 277V

Finishes (see inside back cover)

PTD	Painted - specify color code (ex. BRNZ for Bronze)
BB	Brushed Brass
• BCB	Brushed Chrome
• CB	Polished Chrome
PB	Polished Brass
• SN	Satin Nickel

Options

• ABA	Hand Painted Alabaster Alternative
AF	Add finial
DCC	Damp clear coat required for all metal finishes in damp locations
• DIM-A	Fluorescent dimming, Advance Mark 10, specify voltage
FUSE	Fusing
REM	Remote emergency battery pack for fluorescent lamping
• TL	Top lens, tempered prismatic glass
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lamping (replaces standard junction box)
XPS	Express 10 day shipment

PHOTOMETRICS and BIM



Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports

IES File Number	LER	Report	page
CB3410-2F9	40		
CB3410-2N40	11		
CB3412-2LF13	44	01703	406
CB3412-2N60	12	01704	406
CB3420-2F9	40		
CB3420-2N40	11		
CB3422-2LF13	44	01703	406
CB3422-2N60	12	01704	406

See report on indicated page for complete detail

Candela Distribution

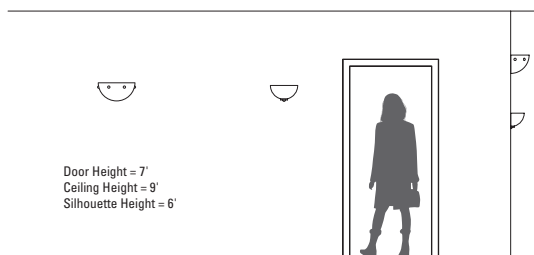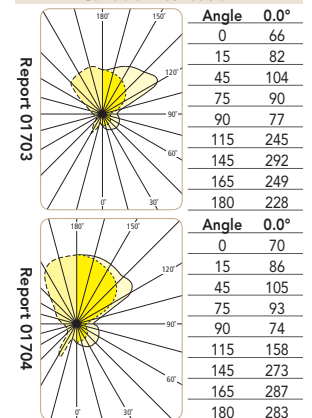

SOLO™ & APOLLO™

INDOOR

DECORATIVE AND PERFORMANCE

WALL



FEATURES

- 5 year product warranty
- Thermally formed 1/8" thick white acrylic diffuser standard with matte finish, UV stable, UL-94 HB flame class rated
- Heavy gauge trim and solid metal accents
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lampping
- High power factor electronic ballast (fluorescent lampping, CB3412 and CB3422 only)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed

COMPANIONS



SUGGESTED VARIATIONS

- Mix and match accents and trim from other product designs
- Add fluorescent dimming ballast
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Larger diffuser sizes available



Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty