


SAMPLE CATALOG NUMBER

CB1210 - 2LF13(MVOLT) - CB - TL
 Model Number Lamping Option (Voltage) Finish Option


Model				Lamping Options	Finish	Options
Model Number	Dimensions					
CB1210	W	14-3/4"	(375 mm)	2LF13 2N60	PTD BCB CB PB SN	DCC REM TL XEM
	H	7-3/8"	(187 mm)			
	D	7"	(178 mm)			
	MC	2-1/2"	(64 mm)			
CB1230	W	14-3/4"	(375 mm)	2LF13 2N60	PTD BCB CB PB SN	DCC REM TL XEM
	H	7-3/8"	(187 mm)			
	D	7"	(178 mm)			
	MC	2-1/2"	(64 mm)			

LINE DRAWINGS

CB1210



CB1230



ABBREVIATION KEY

Dimensions	
W	Width
H	Height
D	Depth (measured from wall to front of fixture)
MC	Mounting Center (measured from top of fixture to center of junction box)
Lamping Options (Voltage)	
LF13	13w twin tube 4-pin, 2GX7 base, FLR (MVOLT)
N60	60w A-19, medium base, INC (120V)
MVOLT is a ballast that operates 120V through 277V	
Finishes (see inside back cover)	
PTD	Painted - specify color code (ex. BRNZ for Bronze)
BCB	Brushed Chrome
CB	Polished Chrome
PB	Polished Brass
SN	Satin Nickel
Options	
DCC	Damp clear coat required for all metal finishes in damp locations
REM	Remote emergency battery pack for fluorescent lampping
TL	Top lens, tempered prismatic glass
XEM	Emergency battery pack mounted in provided recessed box for fluorescent lampping (replaces standard junction box)


PHOTOMETRICS and BIM

Complete BIM (Building Information Modeling) and photometric files for these models may be downloaded from www.visalighting.com

Reports			
IES File Number	LER	Report	page
CB1210-2LF13	44	33728	426
CB1210-2N60	12	01704	406
CB1230-2LF13	44	33728	426
CB1230-2N60	12	01704	406

See report on indicated page for complete detail

Candela Distribution

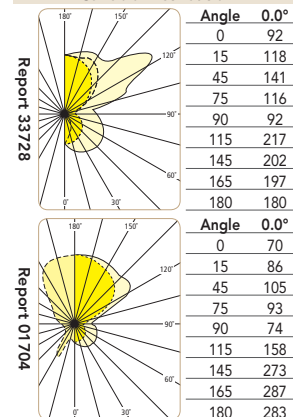

LUMISPHERE GL™



CB1210-CB




CB1230-CB

FEATURES

- 5 year product warranty
- Hand blown cased white glass diffuser
- Extruded and rolled trim
- Oven cured no VOC acrylic powder coat for painted finishes; oven cured low VOC clear coat on metal finishes
- Easy tool-less relamping
- Fluorescent or incandescent lamping
- High power factor electronic ballast (fluorescent lamping)
- Mounts to standard electrical junction box (by others) with provided hardware. XEM option requires replacement of junction box with proprietary junction box (included with XEM option). The XEM junction box is available as a ship-ahead component for rough-in if needed



COMPANIONS

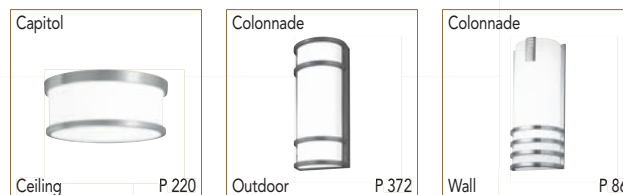

SUGGESTED VARIATIONS

- Hand Painted Alabaster Alternative
- Can be constructed of non-ferrous materials for use in magnetic resonance imaging (MRI) rooms
- Fused circuit protection

Approved for indoor damp locations.
Metal finishes require DCC (damp clear coat) for 5 year warranty